
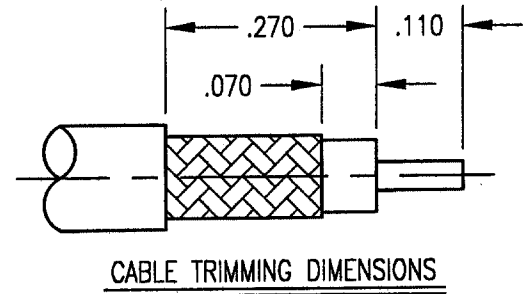


DWG. NO.		261-910-1161G	
REV	DESCRIPTION	BY DATE	APPD
G	ECN 2360	JAM 00/78	[Signature]

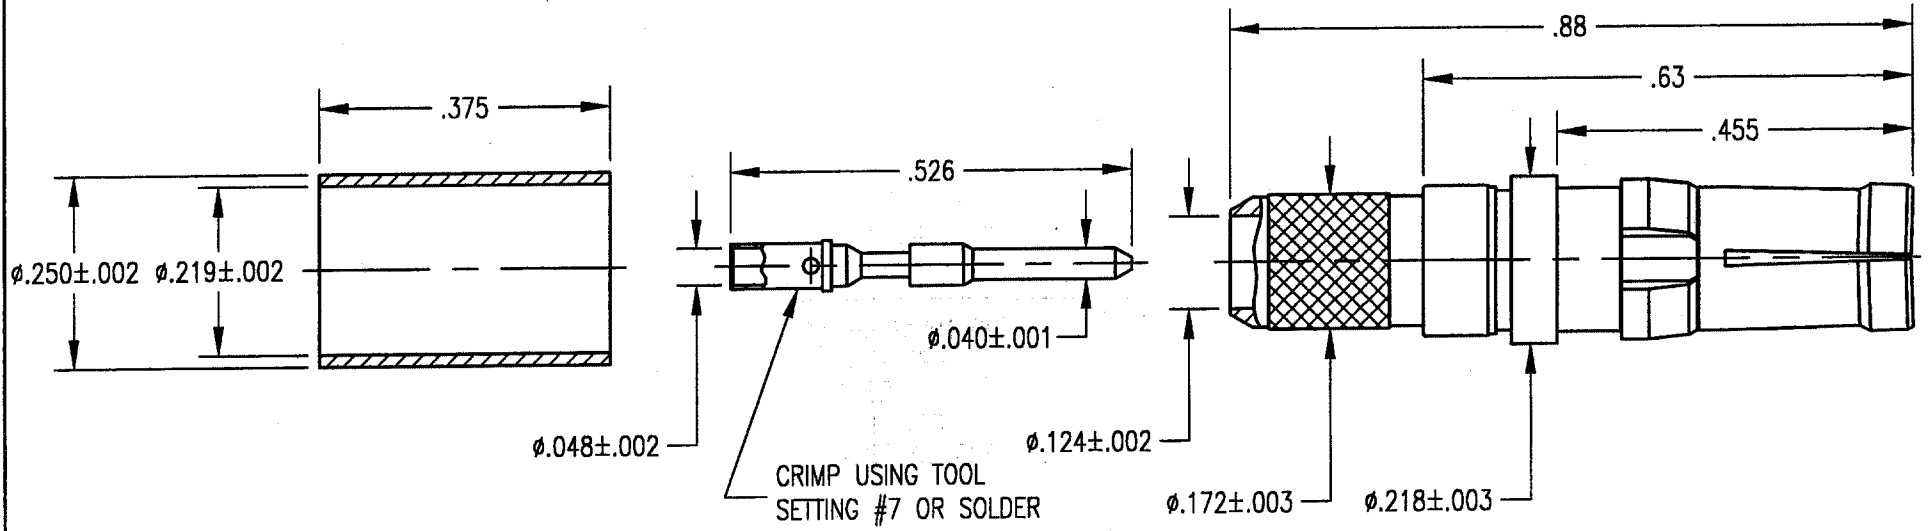

- NOTES:
1. MATERIALS:
 WEDGE BODY, CENTER CONTACT AND FERRULE: BRASS PER ASTM B16
 FRONT BODY: BERYLLIUM COPPER PER ASTM B196
 CLIP RING: BERYLLIUM COPPER PER ASTM B194
 INSULATOR: TEFLON PER ASTM D1710
 2. FINISH:
 BODIES AND CENTER: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 FERRULE: .000005 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 CLIP RING: .000100 MIN. NICKEL PER QQ-N-290 OVER COPPER FLASH
 3. ELECTRICAL:
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS
 FREQUENCY RANGE: 0-900 MHz
 4. FOR USE WITH RG-142 CABLE OR EQUIVALENT.
 5. FOR CABLING PROCEDURES USE CAP 9-07 WITH TRIMMING DIMENSIONS SHOWN.

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES OR INCHES/MILLIMETERS TOLERANCES: DECIMALS .XX ± .01/0.254 XXX ± .005/0.127 ANGLES ± 2° SCALE: 4:1		Litton Winchester Electronics/RETCONN 400 Park Road Waterford, Connecticut 06785	
CUSTOMER DRAWING		TITLE RDM STRIGHT RECEPTACLE CAPTIVE CENTER CONTACT	
DRAWN JED	DATE 5/27/98	CHECKED KJT	DATE 5/27/98
APPROVED JMC	DATE 5/27/98	APPROVED JMC	DATE 5/27/98
A		261-910-1161G	SHT. OF 1 1 REV. G