

6

5

4

3



2

1



Rev	AWO #	Description	Date	Appr
-		RELEASED	1/13/05	

APPROVED: _____

DATE: _____ TITLE: _____

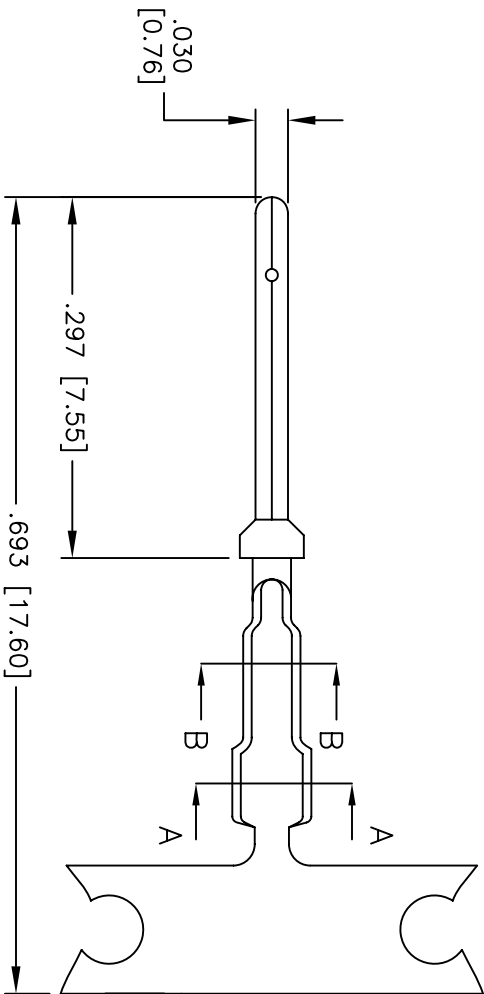

SEC A-A

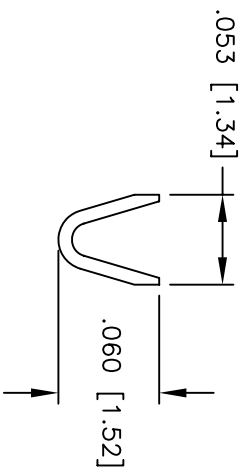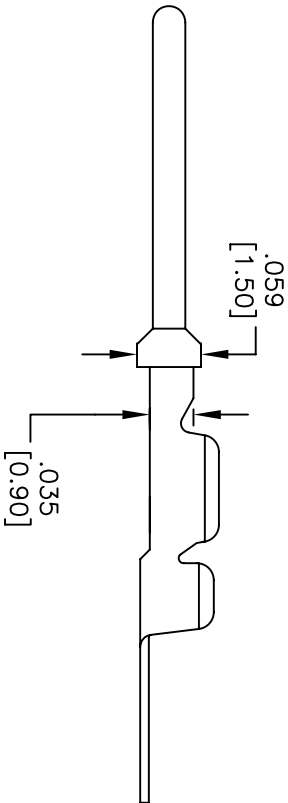

SEC B-B

SPECIFICATIONS:

Material:

Contact: Phosphor Bronze

Plating:

Gold flash over Nickel underplate

Electrical:

Operating voltage: 250 VAC max

Current rating: 5 Amps max

Contact resistance: 20 mohms max initial

Mechanical:

Recommended wire range: 24-26 AWG

Temperature Rating:

Operating temperature: -65°C to +125°C

Packaging:

R = 10,000 Pieces on reel

B = 1,000 Pieces loose cut

Environmental:

Lead free, RoHS compliant



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

HIGH DENSITY D-SUB PLUG CONTACT

24-26 AWG

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				TITLE			
.X	± .10	ØX	± .10	HDCP-01-X			
.XX	± .020	ØXX	± .015	REV. -			
.XXX	± .015	ØXXX	± .010	SHEET 1 OF 1			
APPROVALS				SCALE: NTS			
DRAWN	SS	1/13/05		REV. -			
CHECKED							
APPROVED							