


# PCI-1245 PCI-1265 PCI-1285

## DSP-based 4/6/8-axis Stepping and Servo Motor Control Universal PCI Card

**NEW**

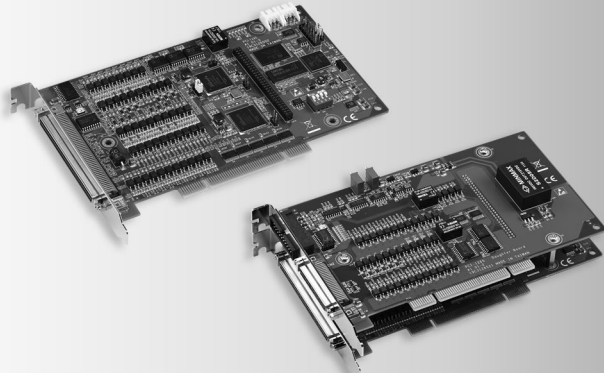

PCI-1245

PCI-1265



### Features

- Encoder input is 10 MHz for 4xAB mode, 2.5 MHz for CW/CCW mode
- Pulse output up to 5 Mpps
- Memory buffer (10K points) for trajectory planning which is designed in DSP
- Supports E-Gear, and helical interpolation
- Supports E-CAM providing 256 points to describe the CAM profiles which buffers located in DSP
- Hardware emergency input
- Watchdog timer
- Position latch
- Position compare triggering up to 100 KHz, and memory buffer is up to 100 K points in DSP
- Programmable interrupt
- Supports gantry mode by semi-closed loop pulse train control
- RDY/LTC-dedicated input channels & SVON/CMP/CAM-DO/ERC-dedicated output channels are switchable for general input and output purposes

### Introduction

PCI-1245/65/85 is a 4/6/8-axis universal PCI (supporting both 3.3 V and 5 V signal slot) stepping/pulse-type servo motor control card designed for applications which need to control interpolation, synchronization among multiple axes, continuous contouring and high speed triggering to integrated machine vision solution. PCI-1245/65/85 utilizes the high-performance DSP and FPGA to calculate the motion trajectories, synchronization timing control for multiple axes and input/output handling to offer functionality, such as up to 4/6-axis linear interpolation, 2-axis circular interpolation, helical interpolation, T/S-curve acceleration/deceleration rate and so on. In addition, Advantech supplies a Common Motion API library, graphical utility and user-friendly examples to decrease programming load, helping users complete configuration and diagnosis easily.

### Specifications

#### Pulse Type Motion Control

- **Motor Driver Support** Pulse-type servo/stepping
- **Number of Axes** PCI-1245: 4  
PCI-1265: 6  
PCI-1285: 8
- **Interpolation** PCI-1245: 2 to 4-axis linear, 2-axis circular, X-Y plane with Z thread helical interpolation  
PCI-1265: 2 to 6-axis linear, 2-axis circular, X-Y plane with Z thread helical interpolation  
PCI-1285: 2 to 8-axis linear, 2-axis circular, X-Y plane with Z thread helical interpolation
- **Max. Output Speed** 5 Mpps
- **Step Count Range** ±2, 147, 483, 646
- **Pulse Output Type** Pulse/direction (1-pulse, 1-direction type) or CW/CCW (2-pulse type)
- **Position Counters** Range of command and actual position
- **Velocity Profiles** T-Curve, S-Curve
- **Local I/O** Machine Interfaces: LMT+, LMT-, ORG  
Servo Driver Interfaces: ALM, INP  
Position Compare I/O: CMP  
General Digital I/O: PCI-1245: 16-ch DI, 16-ch DO (RDY/LTC pin can be switchable to general-purpose input and CAM-DO/ CMP/SVON/ ERC pin to general-purpose output)  
PCI-1265: 32-ch DI, 32-ch DO (RDY/LTC pin can be switchable to general-purpose input and CAM-DO/ CMP/SVON/ ERC pin to general-purpose output)  
PCI-1285: 32-ch DI, 32-ch DO (RDY/LTC pin can be switchable to general-purpose input and CAM-DO/ CMP/SVON/ ERC pin to general-purpose output)  
PCI - 1265: 2
- **Analog Input**

#### Encoder Interface

- **Input Type** Quadrature (A/B phase) or up/down
- **Counts per Enc. Cycle** x1, x2, x4 (A/B phase only)
- **Input Range** 5 ~ 15 V
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Max. Input Frequency** 10 MHz under 4xAB mode

#### General

- **Bus Type** Universal PCI V2.2
- **Connectors** PCI-1245: 1 x 100-pin SCSI female connector  
PCI-1265: 1 x 100-pin SCSI female connector & 1 x 50-pin SCSI female connector  
PCI-1285: 2 x 100-pin mini-SCSI female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** PCI-1245/1265: Typical: 5 V @ 850 mA  
Max.: 5 V @ 1 A  
PCI-1285: Typical: 5 V @ 300 mA  
3.3 V @ 1.2 A  
Max.: 5 V @ 400 mA  
3.3 V @ 1.5 A
- **Humidity** 5 ~ 95% RH, non-condensing (IEC 60068-2-3)
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 85°C (-4 ~ 185°F)

### Ordering Information

- **PCI-1245-AE** 4-axis Stepping/Servo Control Universal PCI Card
- **PCI-1265-AE** 6-axis Stepping/Servo Control Universal PCI Card
- **PCI-1285-AE** 8-axis Stepping/Servo Control Universal PCI Card

#### Accessories

- **ADAM-3956-AE** 100-pin DIN-rail SCSI 4-axis Motion Wiring Board
- **ADAM-3955-AE** 50-pin DIN-rail SCSI 2-axis Motion Wiring Board
- **ADAM-3952-AE** 50-pin DIN-rail SCSI and Box Header Board
- **ADAM-39100-AE** 100-pin DIN-rail SCSI Wiring Board
- **PCL-101100M-1E/2E/3E** 100-pin SCSI Cable, 1m/2m/3m (for PCI-1245/65)
- **PCL-10251-1E/3E** 100-pin SCSI to Two 50-pin SCSI Cable, 1 m/3m (for PCI-1245/65 only)
- **PCL-101100SB-1E/2E/3E** Mini-SCSI-100 Shielded Cable, 1m/2m/3m (for PCI-1285)
- **PCL-10153PA5-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Panasonic A4 and A5 Servo, 2 m
- **PCL-10153PA5LS-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Panasonic MINAS A Servo, 2 m
- **PCL-10153YS5-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Yaskawa Sigma V Servo, 2 m
- **PCL-10153MJ3-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Mitsubishi J3 Servo, 2 m
- **PCL-10153DA2-2E** 50-pin Cable from ADAM-3955/ADAM-3956 to Delta A2 Servo, 2 m