

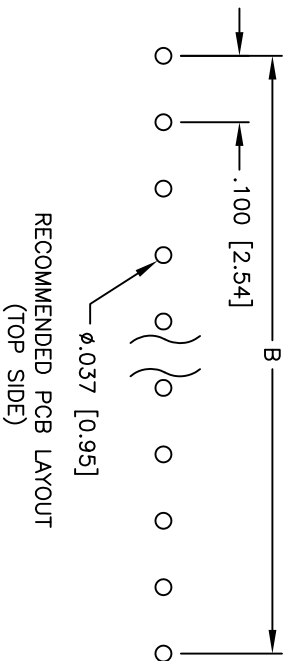
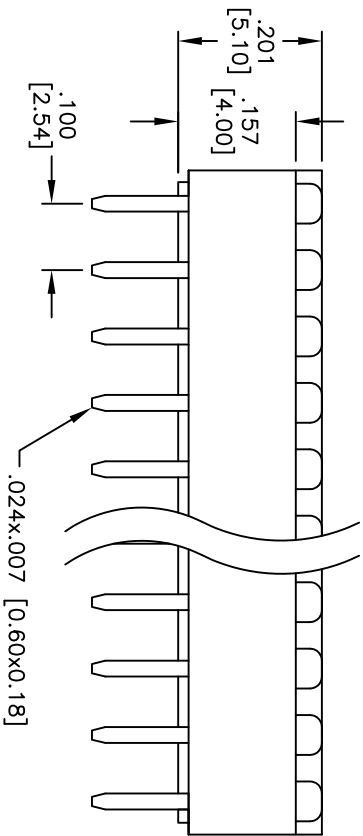


APPROVED: _____
 DATE: _____ TITLE: _____

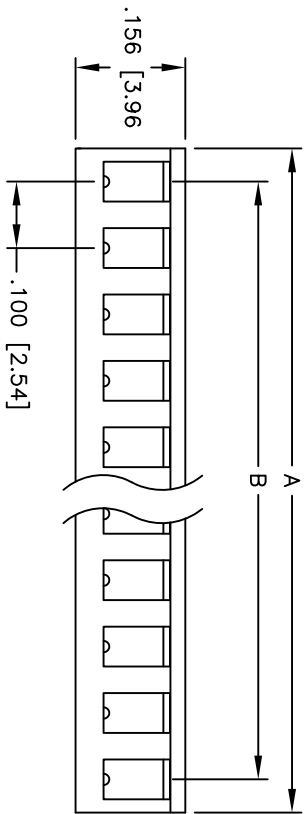

SPECIFICATIONS:
 Material: PBT, Glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Tin over Copper underplate overall

Electrical:
 Operating voltage: 500 VAC max
 Current rating: 1 Amp max
 Contact resistance: 20 mohms max initial
 Insulation resistance: 1,000 Mohms min

Environmental:
 Operating temperature: -55°C to +150°C
 Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds



Rev	AWO #	Description	Date	Appr
-		RELEASED	1/28/05	
A		REDRAWN	12/14/09	

Positions: 1 thru 40 per row
 A = .100 [2.54] x No. of Positions
 B = .100 [2.54] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SINGLE ROW IC SOCKET
 .100" ROW SPACING, TIN PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		HOLDS	
.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS		DATE	
DRAWN	SS	1/28/05	
CHECKED			
APPROVED			
SIZE	PART NO.	SCALE	SHEET 1 OF 1
X	SIS-XX-T	NTS	A
REF: S0009C			