
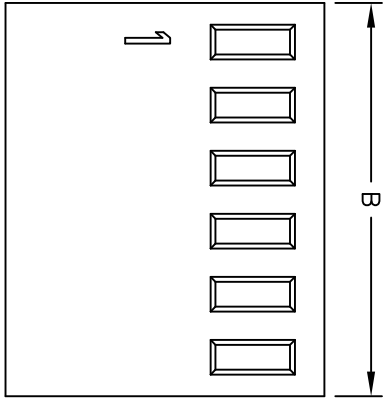
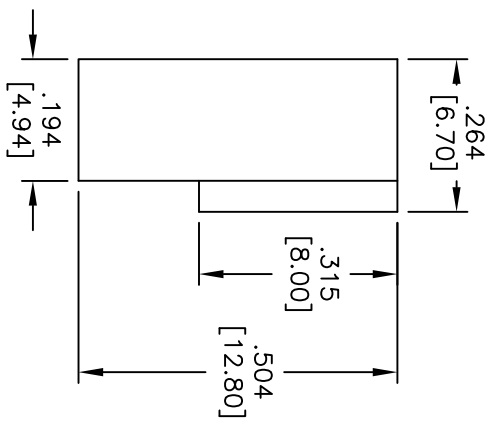


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/25/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

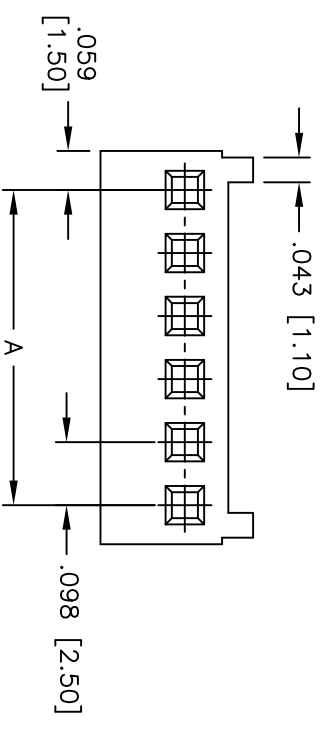

Positions: 2 thru 20  
 A = .098 [2.50] X No. of Spaces  
 B = .098 [2.50] X No. of Spaces + .118 [3.00]

**SPECIFICATIONS:**  
**Material:** Insulator: Nylon 66, Rated UL 94V-0  
 Insulator color: White  
 Contacts: Brass  
**Plating:** Tin over Copper underplate overall  
**Electrical:**  
 Operating voltage: 250 VAC max.  
 Current rating: 3 Amps max.  
 Insulation resistance: 1000 Mohms min  
 Dielectric withstanding voltage: 1500 VAC / minute.  
**Temperature Rating:** Operating temperature: -40°C to +105°C



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES ARE NOTED INCHES	
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE		SIZE		PART NO.		REV.	
HOUSING, PITCH .098 [2.50], UL94V-0		X		25MTA-XX-V0			
WITH POLARIZING RIB, WITH LOCKING RAMP		REF: S00123T		SCALE: NTS		SHEET 1 OF 1	

6 5 4 3 2 1