


SPECIFICATIONS:

1. TEMP CLASS 105°C
2. INDUCTANCE: @ 0.1V, 10 KHz,
1-4 = 225 μ Hy MIN
3. LEAKAGE INDUCTANCE: @ 100 KHz, 1-4
WITH 5-8 SHORTED = 0.4 μ Hy MAX
4. TURNS RATIO: 1-4 : 5-8 = 1 : 1 \pm 2%
5. DC RESISTANCE: 1-4, 5-8 = 0.1 OHMS, NOM
6. INTERWINDING CAPACITANCE @ 100 KHz
1-4 TO 5-8 = 15 pF MAX
7. DIELECTRIC STRENGTH: 1500 Vac, 1 SECOND
1 TO 5
1, 5 TO CORE



NOTE:
COPLANARITY < .006 (0.15)

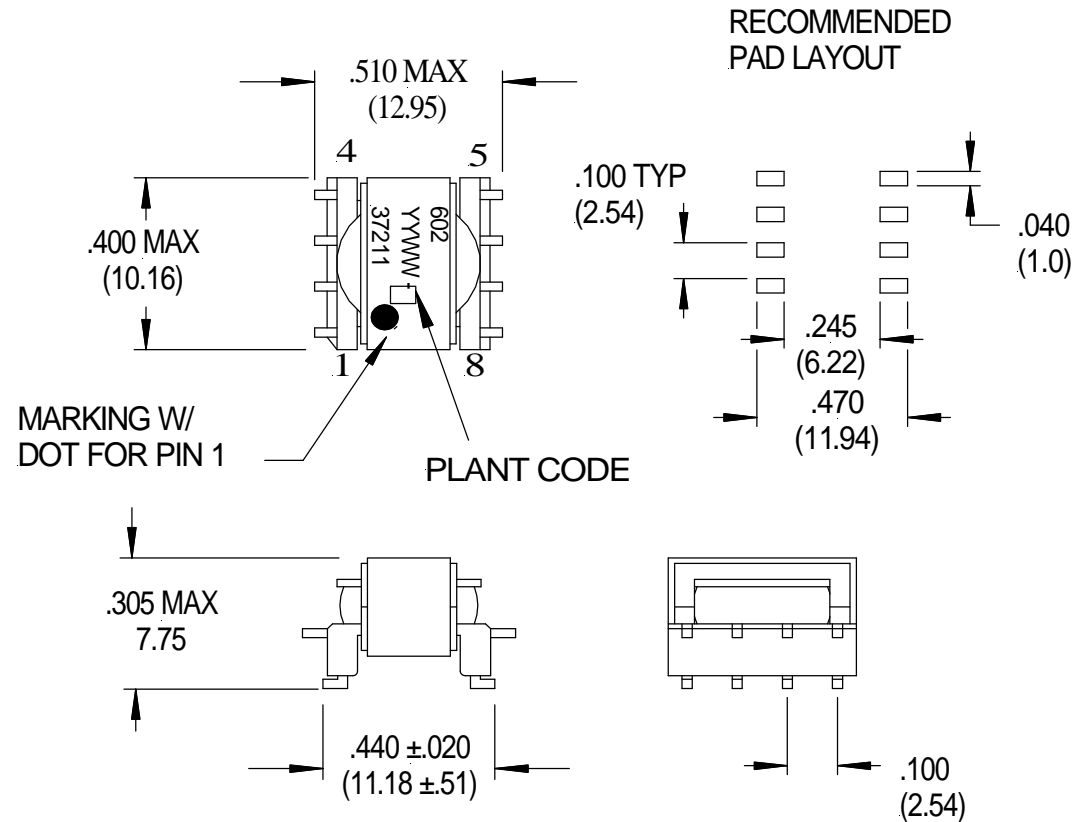