

CMDH05-45  
SURFACE MOUNT  
LOW V<sub>F</sub>  
SILICON SCHOTTKY DIODE



[www.centralsemi.com](http://www.centralsemi.com)

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CMDH05-45 is a 45 volt Schottky diode packaged in a space saving surface mount SOD-323 case. This SUPERmini™ device has been designed for applications requiring a low forward voltage drop.

SUPERmini™



SOD-323 CASE

**MAXIMUM RATINGS:** (T<sub>A</sub>=25°C)

Peak Repetitive Reverse Voltage

SYMBOL		UNITS
V <sub>RRM</sub>	45	V
I <sub>F</sub>	500	mA
I <sub>FRM</sub>	3.5	A
I <sub>FSM</sub>	10	A
P <sub>D</sub>	250	mW
T <sub>J</sub> , T <sub>stg</sub>	-65 to +150	°C
Θ <sub>JA</sub>	500	°C/W

Continuous Forward Current

Peak Repetitive Forward Current, tp≤1.0ms

Peak Forward Surge Current, tp=8.0ms

Power Dissipation

Operating and Storage Junction Temperature

Thermal Resistance


**ELECTRICAL CHARACTERISTICS:** (T<sub>A</sub>=25°C unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I <sub>R</sub>	V <sub>R</sub> =30V		60	100	µA
I <sub>R</sub>	V <sub>R</sub> =30V, T <sub>A</sub> =85°C		2.5		mA
I <sub>R</sub>	V <sub>R</sub> =30V, T <sub>A</sub> =100°C		6.0		mA
BV <sub>R</sub>	I <sub>R</sub> =500µA	45			V
V <sub>F</sub>	I <sub>F</sub> =100µA			0.13	V
V <sub>F</sub>	I <sub>F</sub> =1.0mA			0.21	V
V <sub>F</sub>	I <sub>F</sub> =10mA			0.27	V
V <sub>F</sub>	I <sub>F</sub> =100mA			0.35	V
V <sub>F</sub>	I <sub>F</sub> =500mA			0.47	V
C <sub>T</sub>	V <sub>R</sub> =1.0V, f=1.0MHz			50	pF

**CMDSH05-45**  
**SURFACE MOUNT**  
**LOW  $V_F$**   
**SILICON SCHOTTKY DIODE**



#### SOD-323 CASE - MECHANICAL OUTLINE

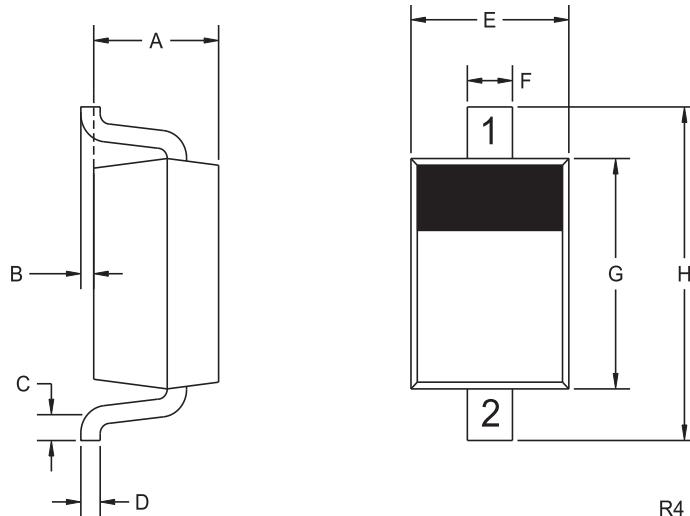

R4

#### LEAD CODE:

- 1) Cathode
- 2) Anode

MARKING CODE: 45C

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.031	0.039	0.80	1.00
B	0.000	0.004	0.00	0.10
C	0.008	-	0.20	-
D	0.004	0.007	0.11	0.19
E	0.045	0.053	1.15	1.35
F	-	0.014	-	0.35
G	0.063	0.071	1.60	1.80
H	0.094	0.102	2.40	2.60

SOD-323 (REV: R4)

R0 (19-June 2012)