
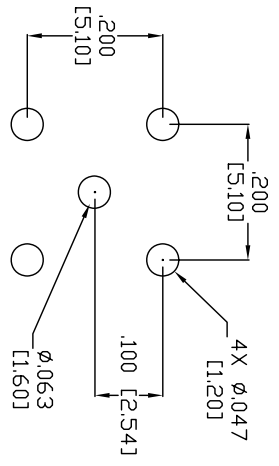
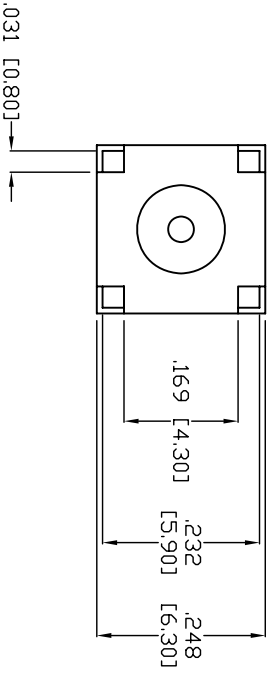


Rev	AWO #	Description	Date	Appr
-	-	RELEASED	01/31/07	

APPROVED: _____
 DATE: _____ TITLE: _____

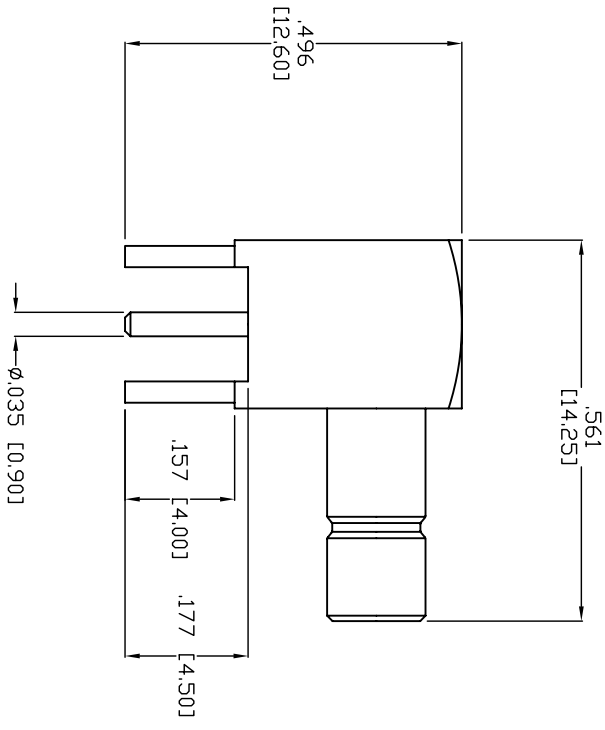

RECOMMENDED
PCB LAYOUT

NO	DESCRIPTION	MATERIAL	FINISH	QTY
3	DIELECTRIC	TEFLON	WHITE	1
2	PIN	BRASS	GOLD	1
1	BODY	BRASS	NICKEL	1

SPECIFICATIONS:

Electrical:
 Nominal Impedance: 50 ohms
 Frequency range: 0-4 GHz
 Maximum peak voltage: 500V
 Insulation resistance: 5000 Mohm min @ 500 VDC
 Dielectric withstanding voltage: 1500 VAC rms
Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED
 INCHES

.X	±.10	Ø.X	±.10
.XX	±.020	Ø.XX	±.015
.XXX	±.015	Ø.XXX	±.010

APPROVALS	DATE
DRAWN	BW
CHECKED	
APPROVED	

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-0214

TITLE
**RIGHT ANGLE SMB FEMALE, 50 OHMS
 PCB MOUNT**

SIZE	PART NO.	REV.
X	RF3-07-T-00-50	-

SCALE: NTS SHEET 1 OF 1