


VIEW A-A  
CROPPED FOR CLARITY



RECOMMENDED P.C.B. LAYOUT

| SWITCH FUNCTION |        |         |
|-----------------|--------|---------|
| POS. 1          | POS. 2 | POS. 3  |
| DN              | NONE   | DN      |
| 2-3,5-6         | DPEN   | 2-1,5-4 |
| 8-9             |        | 8-7     |

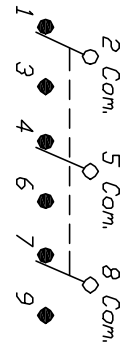

NOTES: CIRCUIT: 3PDT

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 5A @120V or 28VDC 2A @250V
5. CONTACT MATERIAL:  
Copper Alloy W/Silver plate
6. ELECTRIC LIFE: 50,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C

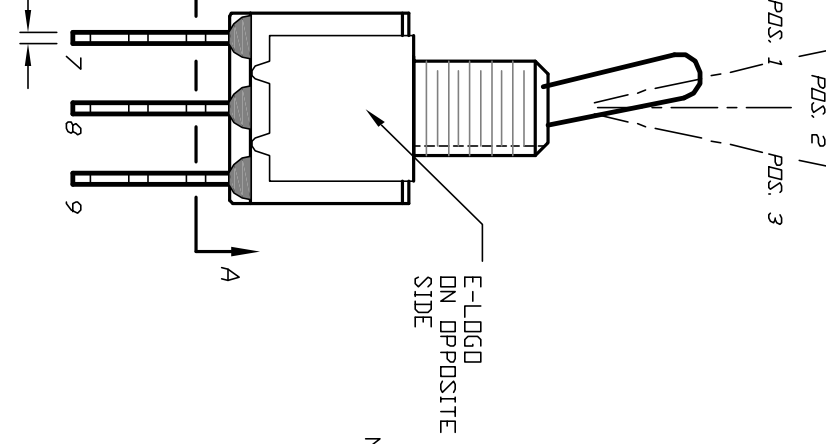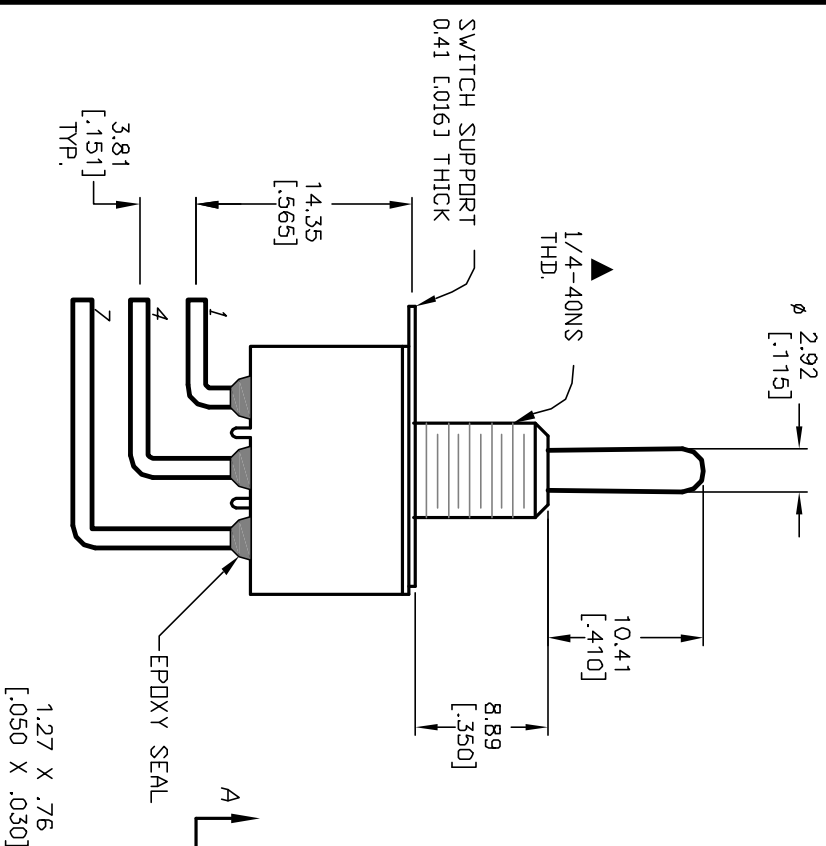

|      |         |             |        |       |
|------|---------|-------------|--------|-------|
| REV. | ECN No. | DESCRIPTION | DATE   | CHK'D |
| A    | 12328   | RELEASED    | 8/7/02 | CJB   |

|                       |  |       |      |    |         |     |
|-----------------------|--|-------|------|----|---------|-----|
| TITLE                 |  | SCALE | DATE | DR | DWG     | REV |
| 100 3P-1 T1 B1 M6 Q E |  | 2:1   | --   | -- | T131014 | A   |



THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED