

15kV 100mA HIGH VOLTAGE DIODE

2CL2x is high reliability resin molded type high voltage diode in small size package which is sealed a multilayed mesa type silicon chip by epoxy resin.

■ Features

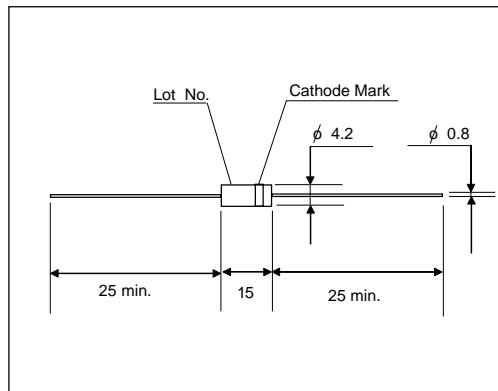
- High speed switching
- High Current
- High surge resistivity for CRT discharge
- High reliability design
- High Voltage

■ Applications

- X light Power supply
- Laser
- Voltage doubler circuit
- Microwave emission power

■ Maximum Ratings and Characteristics

- Absolute Maximum Ratings

■ Outline Drawings : mm**■ Cathode Mark**

Type	Mark
2CL2J	

■ Electrical Characteristics (Ta=25°C Unless otherwise specified)

Items	Symbols	Condition	2CL2J	Units
Repetitive Peak Reverse Voltage	V _{RRM}		15	kV
Average Output Current	I _O	T _a =25°C, Resistive Load	100	mA
Surge Current	I _{FSM}		20	A _{peak}
Junction Temperature	T _J		155	°C
Allowable Operation Case Temperature	T _C		125	°C
Storage Temperature	T _{stg}		-40 to +155	°C

- Electrical Characteristics (Ta=25°C Unless otherwise specified)

Items	Symbols	Conditions	2CL2J	Units
Maximum Forward Voltage Drop	V _F	at 25°C, I _F = 100mA	16	V
Maximum Reverse Current	IR1	at 25°C, V _R = V _{RRM}	2.0	uA
	IR2	at 100°C, V _R = V _{RRM}	40	uA
Maximum Reverse Recovery Time	T _{rr}	at 25°C	-	nS
Junction Capacitance	C _j	at 25°C, V _R = 0V, f = 1MHz	15	pF