

To request the full datasheet, please visit www.intersil.com/products/ISL98608

High Efficiency Power Supply for Small Size Displays

ISL98608

The ISL98608 is a high efficiency power supply for small size displays, such as smart phones and tablets requiring \pm supply rails. It integrates a boost regulator, LDO and inverting charge pump that are used to generate two output rails: \pm 5.5V (default) and \pm 5.5V (default). The \pm 5.5V output voltages can be adjusted from \pm 4.5V up to \pm 7V with 50mV steps using the I²C interface.

The device integrates synchronous rectification MOSFETs for the boost regulator and inverting charge pump, which maximizes conversion efficiency.

ISL98608 integrates all compensation and feedback components, which minimizes BOM count and reduces the solution PCB size to 18mm².

The input voltage range, high efficiency operation and also very low shutdown current make the device ideal for use in single cell Li-ion battery operated applications.

The ISL98608 is offered in a 1.744mm x1.744mm WLCSP package, and the device is specified for operation across the -40°C to +85°C ambient temperature range.

Features

- · Two outputs:
 - VP = +5.5V (default)
 - VN = -5.5V (default)
- · 2.5V to 5V input voltage range
- ±4.5 to ±7V wide output range
- >89% efficiency with 12mA load between VP and VN
- 18mm² solution PCB area
- Fully integrated FETs for synchronous rectification
- · Integrated compensation and feedback circuits
- I²C adjustable output voltages and settings
- · Integrated VP/VN discharge resistors
- 1µA shutdown supply current
- · Programmable turn on and turn off sequencing
- 1.744mm x1.744mm, 4x4 array WLCSP with 0.4mm pitch

Applications

- TFT-LCD smart phone displays
- · Small size/handheld displays

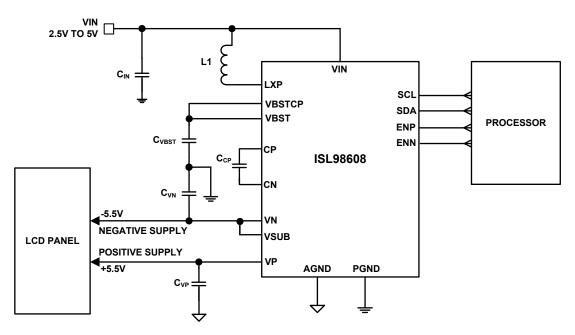


FIGURE 1. TYPICAL APPLICATION CIRCUIT: TFT-LCD SMART PHONE DISPLAY

ISL98608

For additional products, see $\underline{www.intersil.com/en/products.html}$

Intersil products are manufactured, assembled and tested utilizing ISO9001 quality systems as noted in the quality certifications found at www.intersil.com/en/support/qualandreliability.html

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see www.intersil.com