




**Features**

- 50MHz to 850MHz Operation
- 6-Bit Digital Step Attenuator
- Parallel Control Interface
- 31.5dB Attenuation Range (0.5dB Step)
- High OIP3/P1dB=+42/20dBm
- Single +5V Supply
- Robust 500V HBM ESD
- Footprint Compatible with 32-Pin 5mmx5mm QFN

**Applications**

- Transceiver IF DVGA
- Cellular, PCS, 3G Infrastructure
- Wireless Data, Satellite Terminals

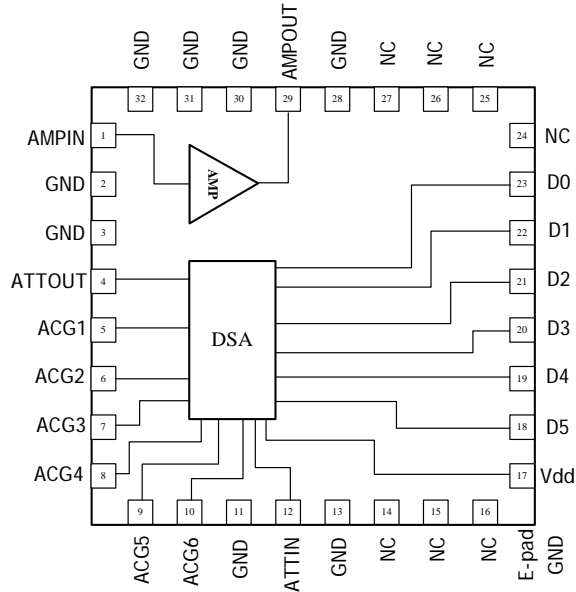

Functional Block Diagram

**Product Description**

RFMD's RFDA0015 is a digital controlled variable gain amplifier featuring high linearity over the entire gain control range. The 6-bit digital step attenuator is programmed with a parallel mode control interface. The RFDA0015 is packaged in a small 5.2mmx5.2mm leadless laminate MCM with plated through thermal vias for ultra low thermal resistance. The footprint for this module is directly compatible with most 32-pin 5mmx5mm QFNs. The amplifier's bias choke and DC blocks are external, allowing for optimum performance over specific bands within 50MHz to 850MHz.

**Ordering Information**

RFDA0015SQ	Sample bag with 25 pieces
RFDA0015SR	7" Reel with 100 pieces
RFDA0015TR7	7" Reel with 750 pieces
RFDA0015TR13	13" Reel with 2500 pieces
RFDA0015PCK-410	50MHz to 850MHz PCBA with 5-piece sample bag

**Optimum Technology Matching® Applied**

- |   |                                      |  |                                   |
|---|--------------------------------------|--|-----------------------------------|
| <input type="checkbox"/> GaAs HBT             | <input type="checkbox"/> SiGe BiCMOS | <input checked="" type="checkbox"/> GaAs pHEMT | <input type="checkbox"/> GaN HEMT |
| <input type="checkbox"/> GaAs MESFET          | <input type="checkbox"/> Si BiCMOS   | <input type="checkbox"/> Si CMOS               | <input type="checkbox"/> RF MEMS  |
| <input checked="" type="checkbox"/> InGaP HBT | <input type="checkbox"/> SiGe HBT    | <input type="checkbox"/> Si BJT                | <input type="checkbox"/> LDMSO    |

RF MICRO DEVICES®, RFMD®, Optimum Technology Matching®, Enabling Wireless Connectivity™, PowerStar®, POLARIS™ TOTAL RADIO™ and UltimateBlue™ are trademarks of RFMD, LLC. BLUETOOTH is a trademark owned by Bluetooth SIG, Inc., U.S.A. and licensed for use by RFMD. All other trade names, trademarks and registered trademarks are the property of their respective owners. ©2006, RF Micro Devices, Inc.

## Absolute Maximum Ratings

Parameter	Rating	Unit
Supply Voltage ( $V_{CC}$ , $V_{DD}$ )	5.5	V
Collector Current ( $I_C$ )	115	mA
Power Dissipation	630	mW
Input RF Power	+20	dBm
Operating Temperature ( $T_{CASE}$ )	-40 to +85	°C
Storage Temperature	-40 to +150	°C
Junction Temperature ( $T_J$ )	+150	°C
ESD Rating (HBM)	Class 1B	
Moisture Sensitivity Level	MSL 3	



**Caution!** ESD sensitive device.

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.

RoHS status based on EU Directive 2002/95/EC (at time of this document revision).

The information in this publication is believed to be accurate and reliable. However, no responsibility is assumed by RF Micro Devices, Inc. ("RFMD") for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. No license is granted by implication or otherwise under any patent or patent rights of RFMD. RFMD reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice.

Notes:







1.  $P_{DISS} = V_{CC} * I_C - \text{RF Output Power} + \text{RF Input Power}$







Parameter	Specification			Unit	Condition
	Min.	Typ.	Max.		
<b>Frequency</b>	50		850	MHz	
Gain - 150MHz (Max Gain State)		18.7		dB	Attenuation=0dB, 150MHz
Gain - 850MHz (Max Gain State)	16.2	17.7	19.2	dB	Attenuation=0dB, 850MHz
Gain Control Range		31.5		dB	0.5dB LSB, 6 bits
Step Accuracy	±(0.1 + 5% attenuation setting)			dB	Major state max error
Output IP3 - 150MHz		42		dBm	150MHz, $P_{OUT}$ =0dBm/tone, 1MHz spacing
Output IP3 - 850MHz	33	35		dBm	850MHz, $P_{OUT}$ =0dBm/tone, 1MHz spacing
Output P1dB	17	20		dBm	Attenuation=0dB
Input Return Loss		20		dB	150 MHz
Output Return Loss		25		dB	150 MHz
Noise Figure		4.7		dB	150MHz, Attenuation=0dB
$t_{RISE}$ , $t_{FALL}$		200		ns	10/90% RF
Amplifier Supply Voltage ( $V_{CC}$ )	4.75	5	5.25	V	
Attenuator Supply Voltage ( $V_{DD}$ )	3.3	5	5.25	V	
Total Supply Current	80	90	100	mA	Sum of currents from $V_{DD}$ and $V_{CC}$
Thermal Resistance		57		°C/W	
Control Interface	6 Bit, Parallel				
Control Voltages	Low, $V_{CTL}$ =0 to 0.8 $V_{DC}$ High, $V_{CTL}$ =2.0 to $V_{DD}$ $V_{DC}$				







Notes:



- All measurements based on the 50MHz to 850MHz Application Circuit,  $T=25^\circ\text{C}$
- $V_{CC}=V_{DD}=+5\text{V}$ ,  $V_{CTL}=0/5\text{V}$

Typical Performance - 50MHz to 850MHz Broadband Application Circuit

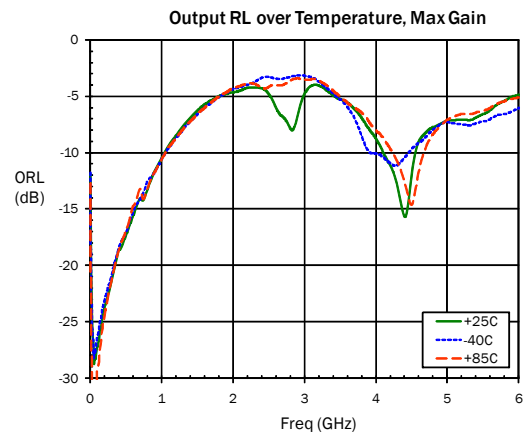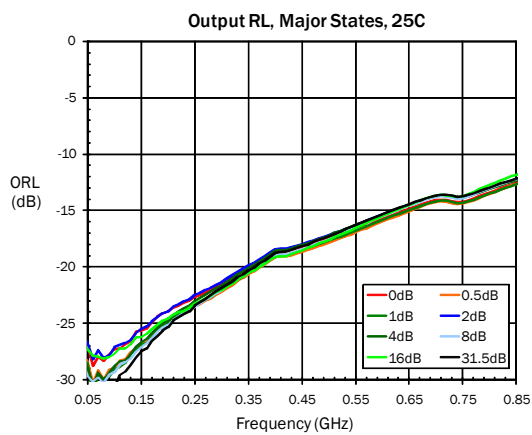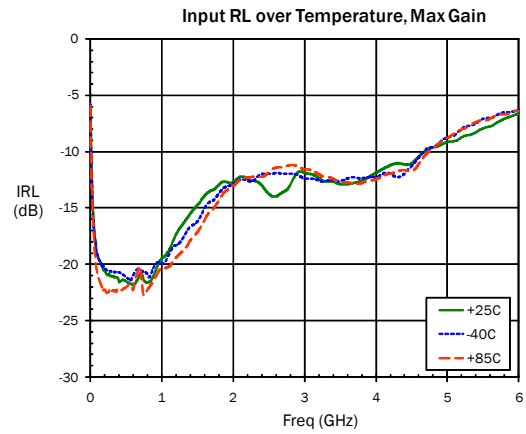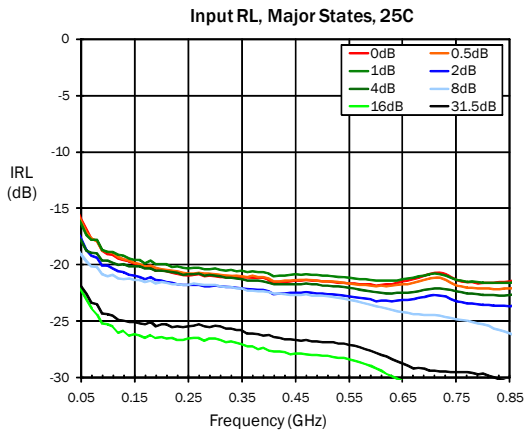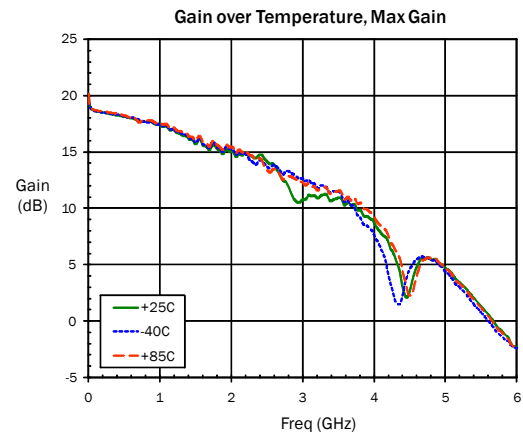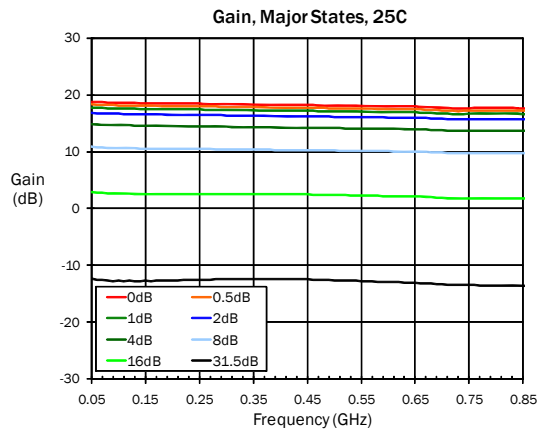

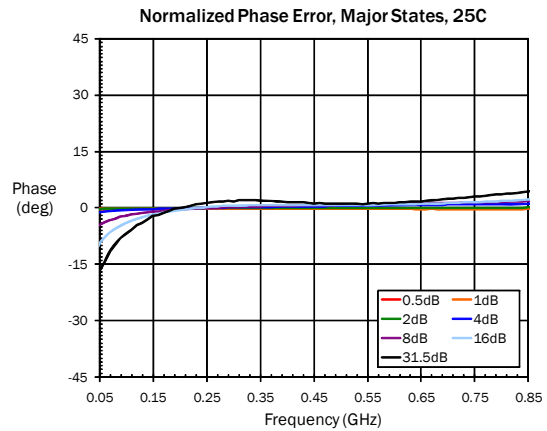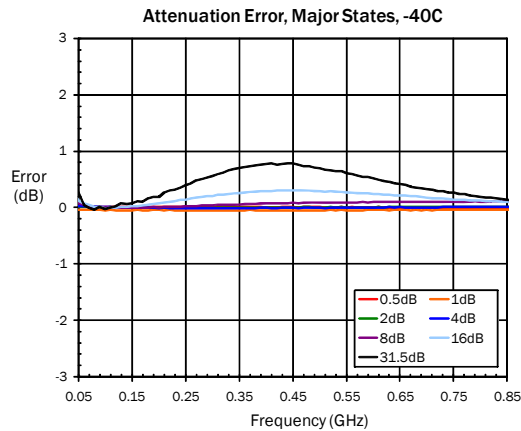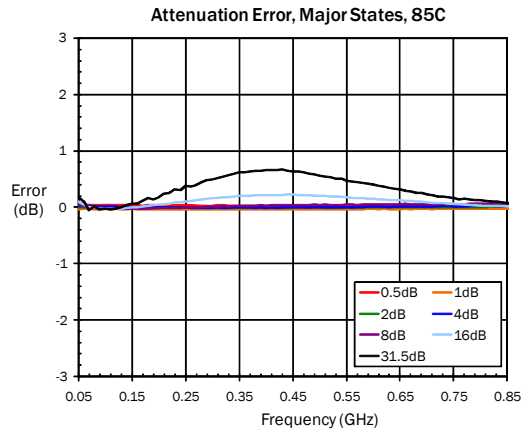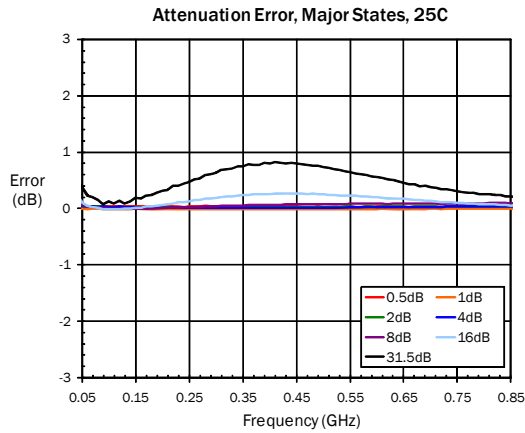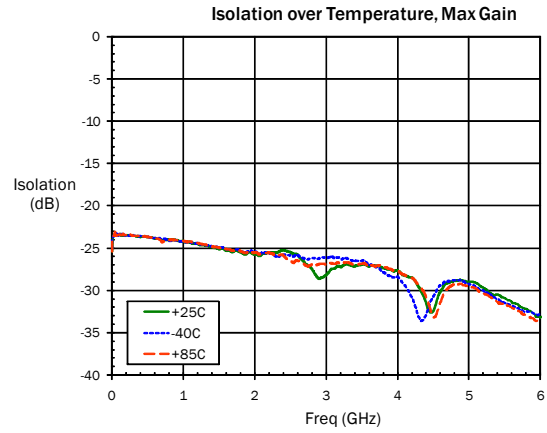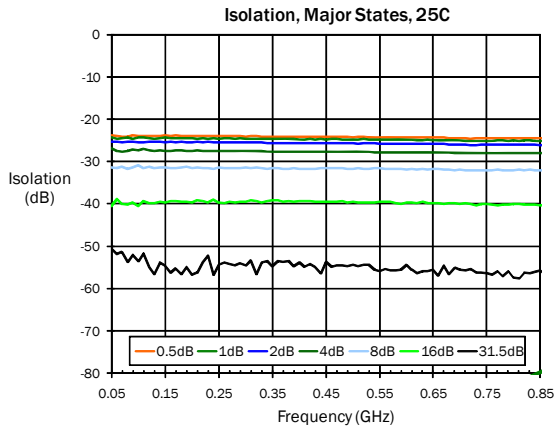

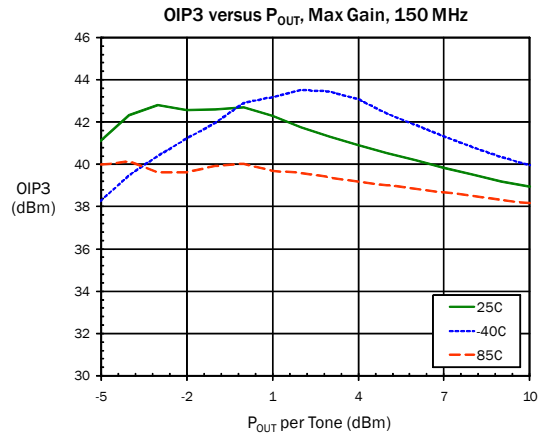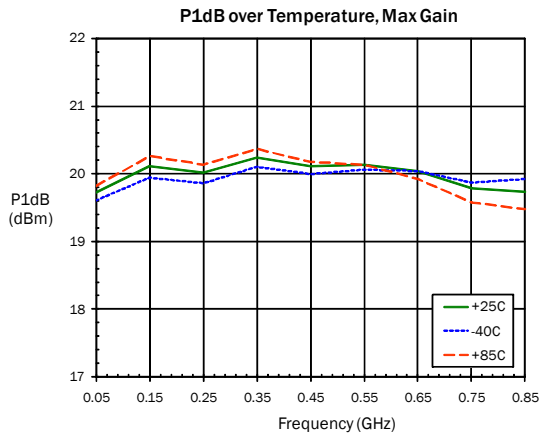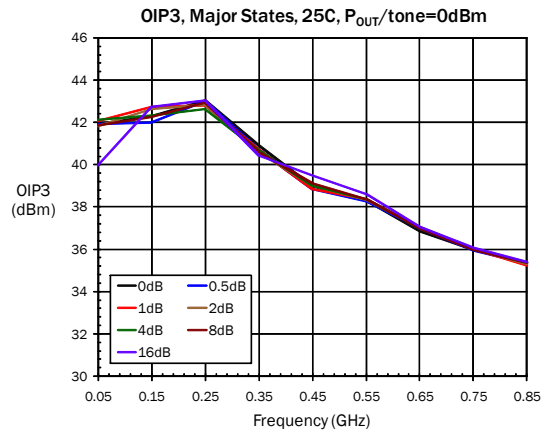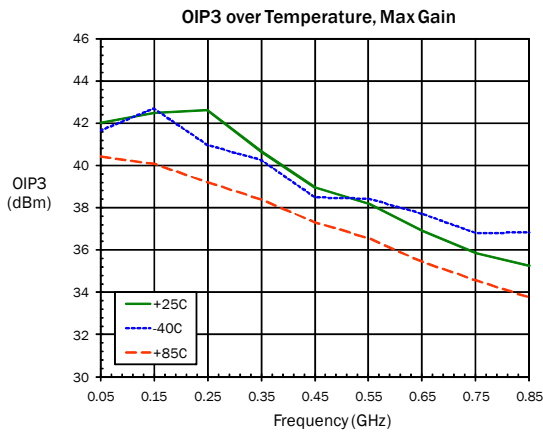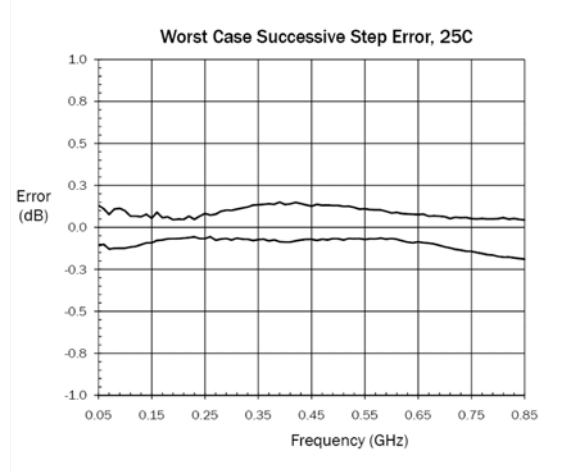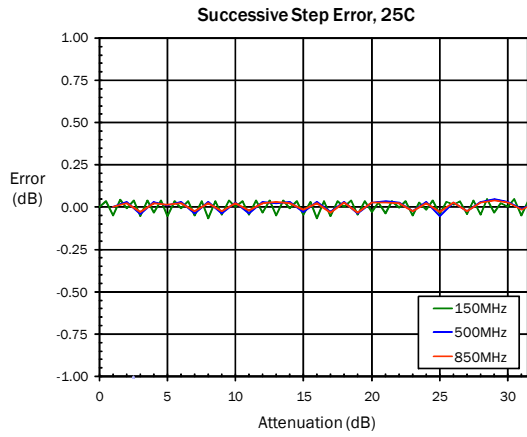

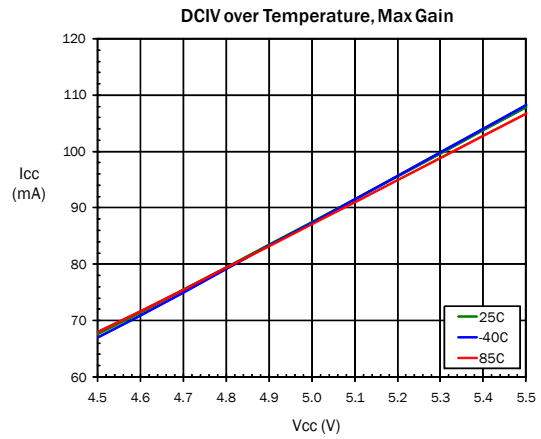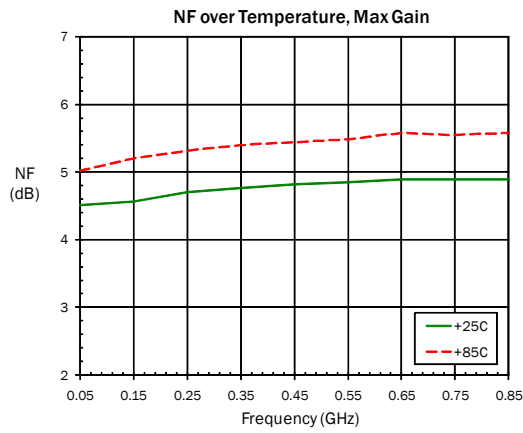

### Truth Table


Control Bit						Relative Gain Setting
D5 16dB	D4 8dB	D3 4dB	D2 2dB	D1 1dB	D0 0.5dB	
1	1	1	1	1	1	Max Gain
1	1	1	1	1	0	-0.5dB
1	1	1	1	0	1	-1dB
1	1	1	0	1	1	-2dB
1	1	0	1	1	1	-4dB
1	0	1	1	1	1	-8dB
0	1	1	1	1	1	-16dB
0	0	0	0	0	0	-31.5dB

0 = Low,  $V_{CTL} = 0$  to  $0.8V_{DC}$   
 1 = High,  $V_{CTL} = 2.0$  to  $V_{DD} V_{DC}$

### Pin Names and Descriptions

Pin	Function	Description
1	<b>AMPIN</b>	Amplifier Input. DC block required.
2	<b>GND</b>	RF/DC Ground Connection.
3	<b>GND</b>	RF/DC Ground Connection.
4	<b>ATTOUT</b>	Digital Attenuator Output. DC block required.
5	<b>ACG1</b>	External bypass capacitor required for F<500MHz. (impacts step error)
6	<b>ACG2</b>	External bypass capacitor required for F<500MHz. (impacts step error)
7	<b>ACG3</b>	External bypass capacitor required for F<500MHz. (impacts step error)
8	<b>ACG4</b>	External bypass capacitor required for F<500MHz. (impacts step error)
9	<b>ACG5</b>	External bypass capacitor required for F<500MHz. (impacts step error)
10	<b>ACG6</b>	External bypass capacitor required for F<500MHz. (impacts step error)
11	<b>GND</b>	RF/DC Ground Connection.
12	<b>ATTIN</b>	Digital Attenuator Input. DC block required.
13	<b>GND</b>	RF/DC Ground Connection.
14	<b>NC</b>	No internal connection.
15	<b>NC</b>	No internal connection.
16	<b>NC</b>	No internal connection.
17	<b>VDD</b>	Digital Attenuator Supply Voltage.
18	<b>D5</b>	Digital Attenuator Parallel Control Line - 16dB Bit.
19	<b>D4</b>	Digital Attenuator Parallel Control Line - 8dB Bit.
20	<b>D3</b>	Digital Attenuator Parallel Control Line - 4dB Bit.
21	<b>D2</b>	Digital Attenuator Parallel Control Line - 2dB Bit.
22	<b>D1</b>	Digital Attenuator Parallel Control Line - 1dB Bit.
23	<b>D0</b>	Digital Attenuator Parallel Control Line - 0.5dB Bit.
24	<b>NC</b>	No internal connection.
25	<b>NC</b>	No internal connection.
26	<b>NC</b>	No internal connection.
27	<b>NC</b>	No internal connection.
28	<b>GND</b>	RF/DC Ground Connection.
29	<b>AMPOUT/VCC</b>	Amplifier Output and Bias. External choke, bypassing, and DC blocks required.
30	<b>GND</b>	RF/DC Ground Connection.
31	<b>GND</b>	RF/DC Ground Connection.
32	<b>GND</b>	RF/DC Ground Connection.

## Evaluation Schematic 50 MHz to 850 MHz Application Circuit

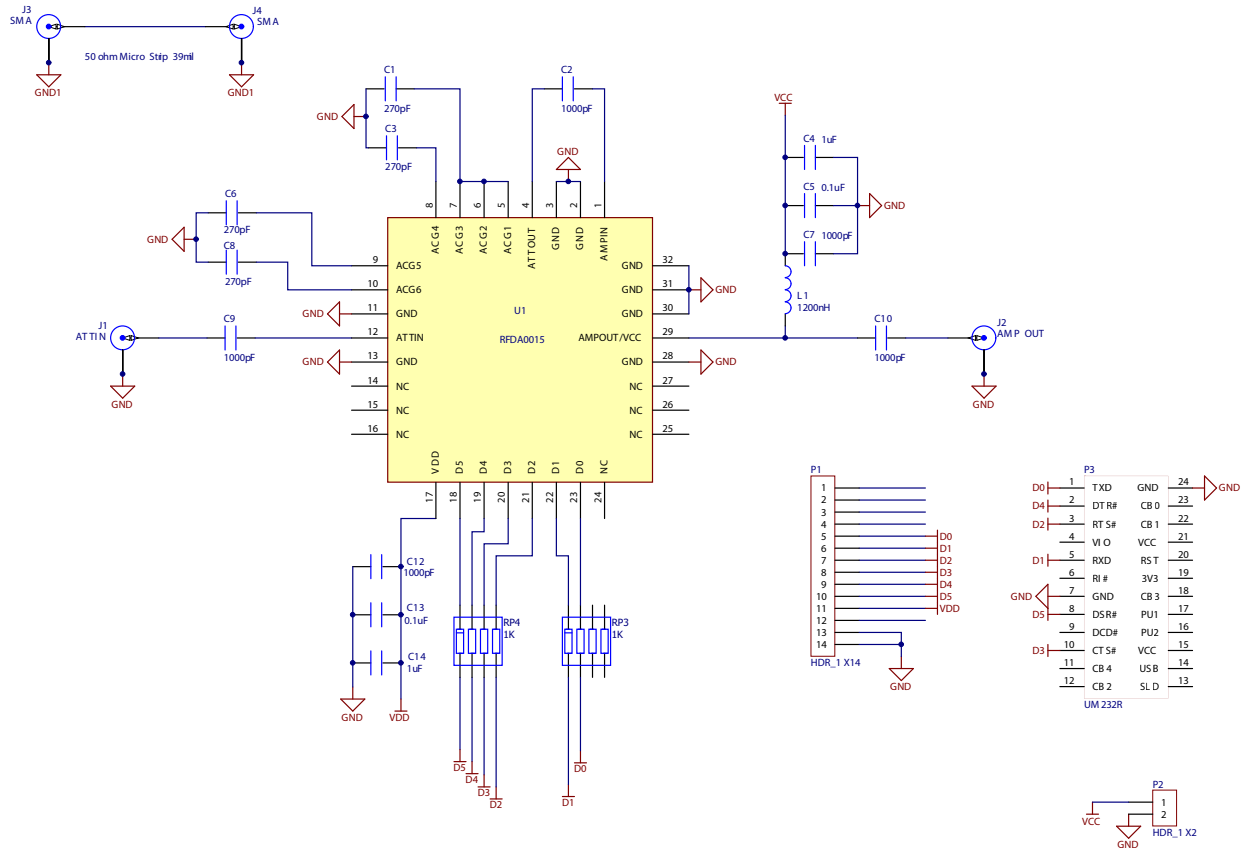


## Evaluation Board Bill of Materials (BOM) 50MHz to 850MHz Application Circuit

Description	Reference Designator	Manufacturer	Manufacturer's P/N
RDA1005L w/ USB Evaluation Board	PCB Itself	Dynamic Details (DDI) Toronto	RDA1005L410(C)
IF Digital Var Gain Amp (50MHz to 850MHz)	U1	RFMD	RFDA0015
CAP, 270pF, 5%, 50V, COG, 0402	C1, C3, C6, C8	Murata Electronics	GRM1555C1H271JA01E
CAP, 1000pF, 10%, 50V, X7R, 0402	C2, C7, C9-C10, C12	Murata Electronics	GRM155R71H102KA01E
CAP, 0.1µF, 10%, 16V, X7R, 0603	C5, C13	Murata Electronics	GRM188R71C104KA01D
CAP, 1µF, 10%, 16V, X7R, 0805	C4, C14	Murata Electronics	GRM21BR71C105KA01K
IND, 1200nH, 5%, W/W, 1008	L1	Coilcraft	1008CS-122XJLC
RES ARRAY, 4-ELEM, 1K, 5%, SMD 4 x 0402	RP3-RP4	KOA	CN1E4KTTD102J
CONN, HDR, ST, PLRZD, 14-Pin, 0.100"	P1	ITW Pancon	MPSS100-14-C
CONN, HDR, ST, PLRZD, 2-Pin, 0.100"	P2	ITW Pancon	MPSS100-2-C
CONN, SKT, 24-PIN DIP, 0.600", T/H	P3	Aries Electronics Inc.	24-6518-10
CONN, SMA, END LNCH, FLT, 0.062"	J1-J4	Emerson Network Power	142-0701-821
MOD, USB TO SERIAL UART, SSOP-28	M1	Future Technology Devices Int'l	UM232R
DNP	C11, R1-R2, RP2	N/A	N/A

Note: M1 is to be mounted into P3 with respect to the Pin 1 alignment of M1 and P3.




**Evaluation Board Assembly Drawing**

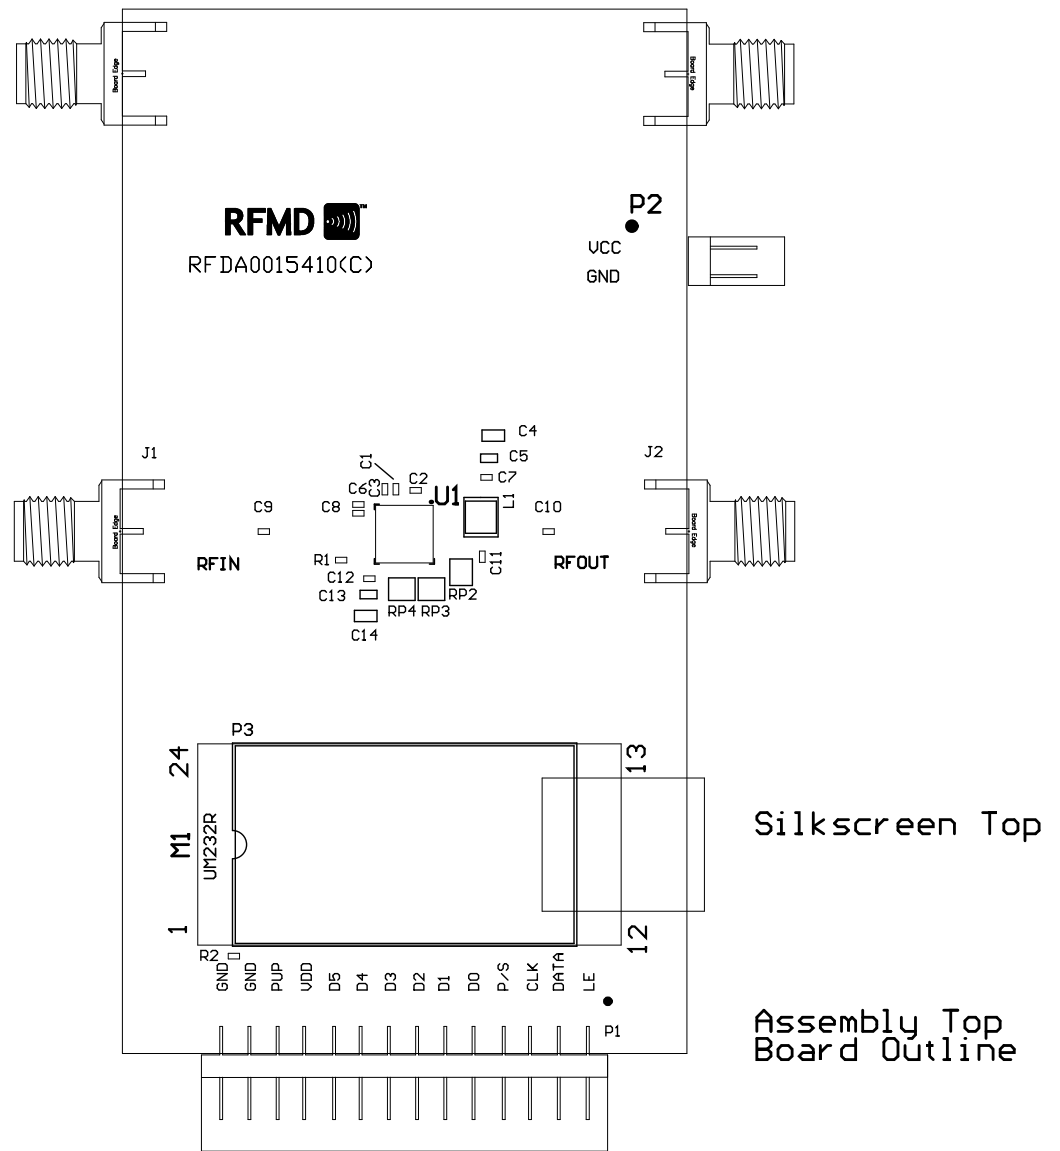

## Package Drawing

### 5.2mmx5.2mm Laminate Module

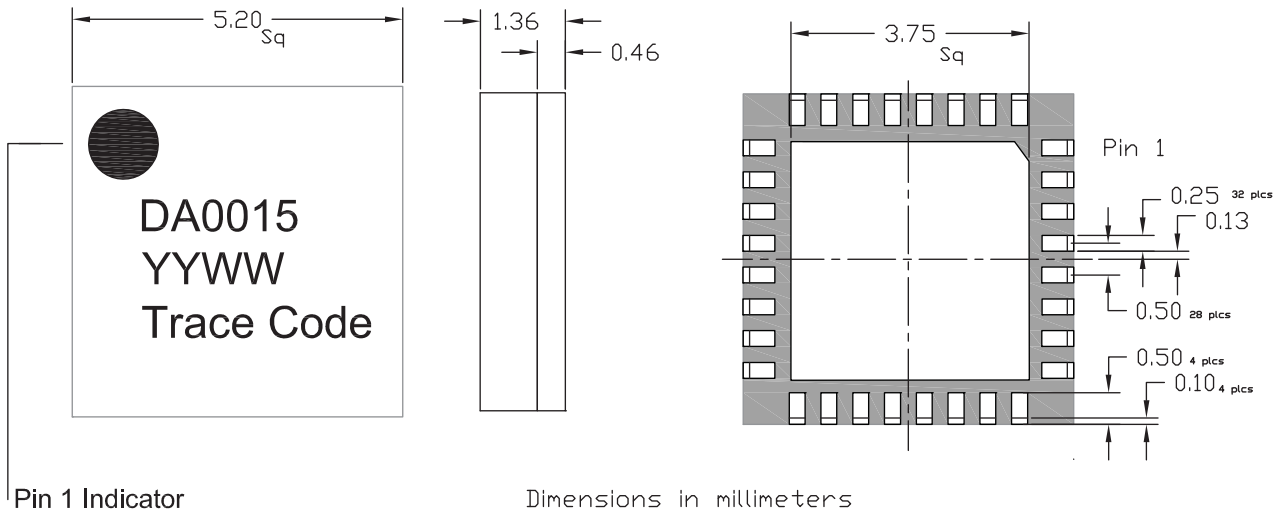

Pin 1 Indicator

YY = Year  
WW = Week

Trace Code to be assigned by SubCon