


GSD

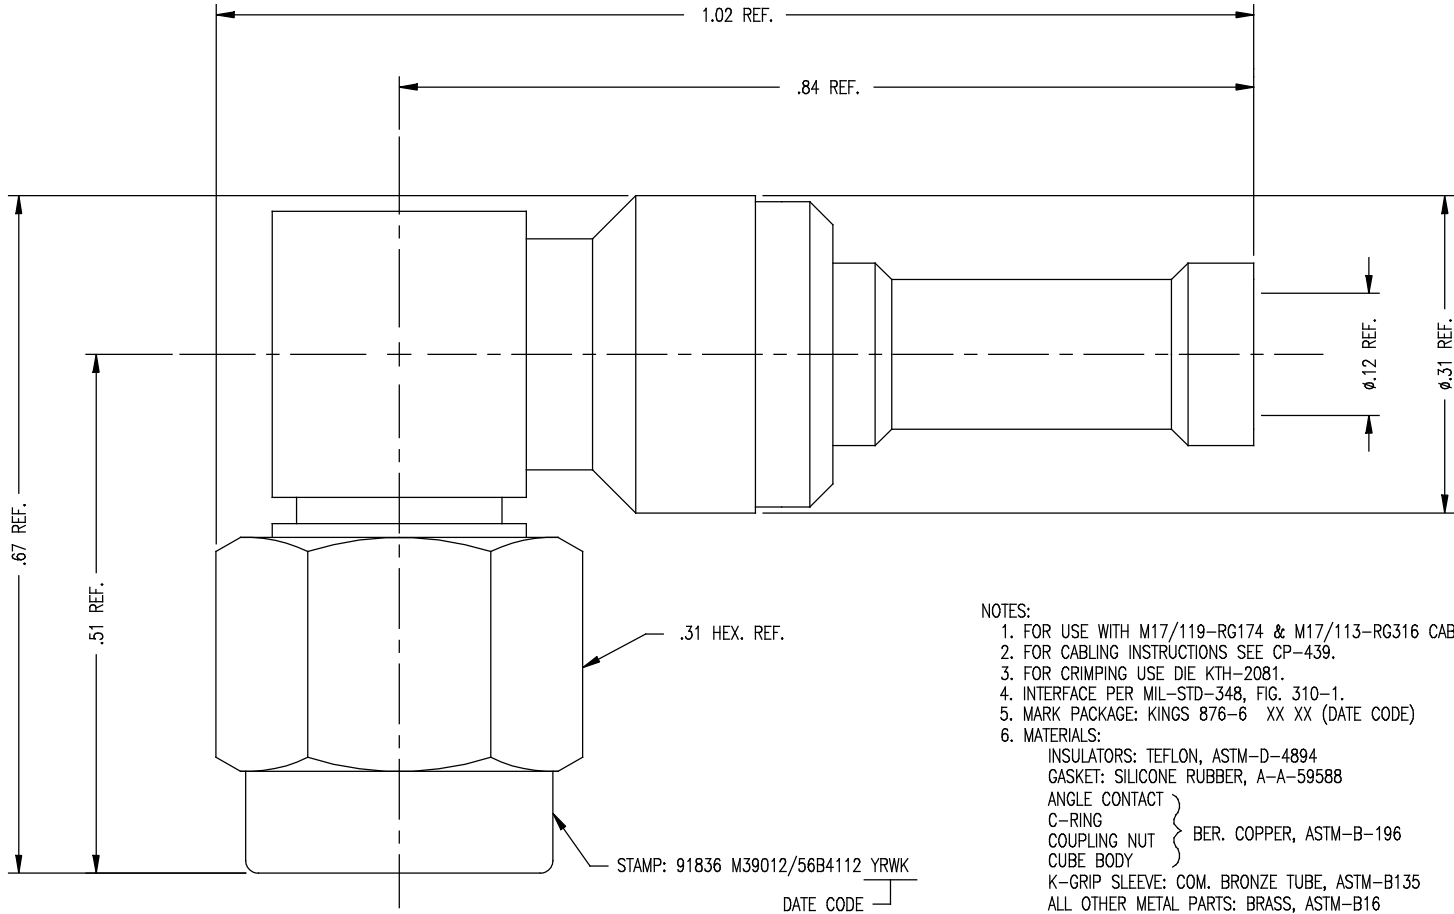

- NOTES:
1. FOR USE WITH M17/119-RG174 & M17/113-RG316 CABLES.
 2. FOR CABLING INSTRUCTIONS SEE CP-439.
 3. FOR CRIMPING USE DIE KTH-2081.
 4. INTERFACE PER MIL-STD-348, FIG. 310-1.
 5. MARK PACKAGE: KINGS 876-6 XX XX (DATE CODE)
 6. MATERIALS:
 - INSULATORS: TEFLON, ASTM-D-4894
 - GASKET: SILICONE RUBBER, A-A-59588
 - ANGLE CONTACT
 - C-RING
 - COUPLING NUT
 - CUBE BODY
 } BER. COPPER, ASTM-B-196
 7. FINISHES:
 - ALL METAL PARTS: HARD GOLD PLATE, PER ASTM-B488.
 8. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 50 OHMS
 - VOLTAGE RATING: 500 VRMS
 - FREQUENCY RANGE: DC TO 12.4 GHz.

M39012/56-4112

REVISIONS	
ISSUE	CHANGES
7	CN 39893 A REDRAWN DCT 4/20/7

SCALE 8:1	
APPROX SURFACE AREA	
876-6	
USED ON	
REF:	
PLUG, ANGLE, SMA	
DRAWN DCT	DATE 4/20/7
DESIGN	DATE
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

M39012/56-4112

GSD