


**Multilayer Ceramic Chip Capacitors
(For General Electronic Equipment)**

Series: **ECU**
Series: **ECJ**



- Features
 - Small in size and wide capacitance range
 - Superior humidity characteristics and long life thanks to monolithic construction
 - Excellent solderability and resistance to soldering heat thanks to terminals with three layers of silver, nickel, and solder
 - Low self-inductance and excellent frequency characteristics

- Recommended Applications
 - Class 1 (T.C. Type)
Temperature compensation, tuned circuits, and filter circuits, where low loss, high stability of capacitance, and high insulation resistance are required
 - Class 2 (Hi-K Type)
Coupling and By-pass, where low loss and high stability of capacitance are not so important

■ Explanation of Part Numbers

- ECU Series

1 2 3 4 5 6 7 8 9 10 11 12 (Example)

E C U X 1 H 1 0 1 J C G

| Product Code | Packaging Styles | | Rated Voltage | | Nominal Capacitance | | Capacitance Tolerance | | | Temperature Characteristics | | Suffix | | |
|---|------------------|--|---------------|---------|---------------------|-----------------------|-----------------------|----------------|--------|-----------------------------|------------|--------|--------------|------|
| | Code | Styles | Code | Voltage | Ex. | Cap. | Code | Tol. | Note | Code | Temp.Char. | Code | Size Code | |
| ECU Multilayer Ceramic Chip Capacitors | X | Bulk | 1H | 50 VDC | 0R5 | 0.5 pF | C | ±0.25 pF | ≤10 pF | C | NP0 | Q | 10 type 0402 | |
| | E | Paper Taping (Pitch: 2 mm) | 1E | 25 VDC | 010 | 1 pF | D | ±0.5 pF | | V | N150 | V | 11 type 0603 | |
| | V | Paper Taping (Pitch: 4 mm) | 1C | 16 VDC | 100 | 10 pF | F | ±1 pF | | R | N220 | N/G | 12 type 0805 | |
| | Y | Embossed Taping (Pitch: 4 mm) | | | 101 | 100 pF | J | ±5 % | | S | N330 | X | 12 type | 1206 |
| | W | Large Size Reel Taping (Pitch: 2 mm) | | | 104 | 100000 pF (0.1 μF) | K | ±10 % | | T | N470 | M/H | 13 type | |
| | Z | Large Size Reel Taping (Pitch: 4 mm) | | | | | M | ±20 % | | U | N750 | W | 13 type | |
| | C | Bulk Case | | | | | Z | +80 % -20 % | | Nil* | SL/GP | | | |
| | | | | | | | | | B | B/X7R | | | | |
| | | | | | | | | | F | F/Y5V | | | | |

* When omitted, all the rest P/N factors shall be moved up respectively

- ECJ Series

1 2 3 4 5 6 7 8 9 10 11 12 (Example)




E C J 3 Y F 1 C 4 7 5 Z

| Product Code | Suffix | | Packaging Styles | | Temperature Characteristics | Rated Voltage | | Nominal Capacitance | | Capacitance Tolerance | | |
|---|--------|-----------------|------------------|--|--|---------------|---------|---------------------|-----------------------|-----------------------|----------------|--------|
| | Code | Size Code (EIA) | Code | Styles | | Code | Voltage | Ex. | Cap. | Code | Tol. | Note |
| ECJ Multilayer Ceramic Chip Capacitors | 0 | 10 type (0402) | X | Bulk | Code Temp.Char. B B/X7R F F/Y5V | 1H | 50 VDC | 103 | 10000 pF | K | ±10 % | >10 pF |
| | 1 | 11 type (0603) | E | Paper Taping (Pitch: 2 mm) | | 1E | 25 VDC | 104 | 100000 pF (0.1 μF) | M | ±20 % | |
| | 2 | 12 type (0805) | V | Paper Taping (Pitch: 4 mm) | | 1C | 16 VDC | 105 | 1 μF | Z | +80 % -20 % | |
| | 3 | 13 type (1206) | Y | Embossed Taping (Pitch: 4 mm) | | 1A | 10 VDC | | | | | |
| | | | W | Large Size Reel Taping (Pitch: 2 mm) | | | | | | | | |
| | | | Z | Large Size Reel Taping (Pitch: 4 mm) | | | | | | | | |
| | | C | Bulk Case | | | | | | | | | |

■ Precautions for Handling

See Page 26 to 30

■ Construction



■ Dimensions in mm (not to scale)

| Size Code (EIA) | L | W | T | L ₁ , L ₂ |
|------------------|-----------|-----------|------------|---------------------------------|
| "10" Type (0402) | 1.00±0.05 | 0.50±0.05 | 0.50±0.05 | 0.20±0.10 |
| "11" Type (0603) | 1.60±0.10 | 0.80±0.10 | 0.80±0.10 | 0.30±0.20 |
| "12" Type (0805) | 2.00±0.10 | 1.25±0.10 | 1.35 max.* | 0.50±0.25 |
| "13" Type (1206) | 3.20±0.15 | 1.60±0.15 | 1.8 max.* | 0.60±0.30 |

* Specified by the nominal capacitance

■ Capacitance Range in pF

● T.C. Type

| Class | Size Code (EIA) | Dim. "T" (mm) | Capacitance Range (pF) [50 VDC] | | | | | | |
|-------|-----------------|---------------|---------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| | | | NP0 CΔ | SL 50VDC | N150 PΔ* | N220 RΔ* | N330 SΔ* | N470 TΔ* | N750 UΔ* |
| | | | | | 50VDC | 50VDC | 50VDC | 50VDC | 50VDC |
| 1 | "10" (0402) | 0.50±0.05 | 0.5-220 | 0.5-220 | 0.5-39 | 0.5-39 | 0.5-39 | 0.5-39 | 0.5-120 |
| | "11" (0603) | 0.80±0.1 | 0.5-1000 | 0.5-1200 | 0.5-150 | 0.5-180 | 0.5-180 | 0.5-220 | 0.5-1200 |
| | "12" (0805) | 0.6±0.1 | 0.5-2200 | 0.5-2700 | 0.5-220 | 0.5-220 | 0.5-220 | 0.5-270 | 0.5-2700 |
| | | 0.85±0.10 | 2400, 2700 | — | 240-330 | 240-390 | 240-470 | 300-470 | — |
| | "13" (1206) | 0.6±0.1 | 2400-4700 | 3000-5600 | 240-560 | 240-680 | 240-680 | 300-820 | 3000-5600 |
| | | 0.85±0.10 | 5100-6800 | — | 620-1200 | 750-1200 | 750-1500 | 910-1500 | — |
| | | 1.15±0.10 | 7500-10000 | — | — | — | — | — | |

* PA to UA : Special order

● (Capacitance values) E12 series : Standard order, E24 series : Special order

● Hi-K Type

| Class | Size Code (EIA) | Dim. "T" (mm) | Capacitance Range (pF) | | | | | | | |
|-------|-----------------|---------------|------------------------|----------------|-----------------|----------------|---------------|----------------|------------------|------------------|
| | | | B [X7R] | | | | F [Y5V] | | | |
| | | | 50 VDC | 25 VDC | 16 VDC | 10 VDC | 50 VDC | 25 VDC | 16 VDC | 10 VDC |
| 2 | "10" (0402) | 0.50±0.05 | 100-3900 | 100-6800 | 5600-15000 | — | 1000-10000 | 1000-22000 | 15000-100000 | — |
| | "11" (0603) | 0.8±0.1 | 220-15000 | 10000-47000 | 10000-100000 | 120000-220000 | 1000-47000 | 68000, 100000 | 100000-470000 | 1000000 |
| | "12" (0805) | 0.6±0.1 | 1000-22000 | — | — | — | 10000-68000 | 68000-150000 | 100000-220000 | — |
| | | 0.85±0.10 | 27000-39000 | 39000-100000 | 47000-220000 | — | 100000-220000 | 220000 | 330000-1000000 | — |
| | "13" (1206) | 1.25±0.10 | 47000-100000 | 120000-220000 | 270000-470000 | 560000-1000000 | — | 330000, 470000 | 1500000, 2200000 | 3300000, 4700000 |
| | | 0.85±0.10 | — | 100000-330000 | 100000-680000 | — | — | 470000 | 680000-2200000 | — |
| | | 1.15±0.10 | — | 390000-470000 | 820000, 1000000 | — | — | 680000-2200000 | 3300000, 4700000 | |
| | | 1.6±0.2 | — | 560000-1000000 | — | 200000-3300000 | — | — | 10000000 | |

● (Capacitance values) B[X7R] E6 series : Standard order, E12 series : Special order

F[Y5V] E3 series : Standard order, E6 series : Special order

■ Nominal Capacitance vs. Capacitance Tolerance

| Tol. Code | Capacitance Tolerance | Nominal Capacitance Available (pF) | | Temp. Char. | Class | |
|-----------|-----------------------|------------------------------------|------------------------------------|--|------------------------------------|------------------|
| C | ≤ 10 pF | ±0.25 pF | 0.5, 1, 1.5, 2, 3, 4, 5 | | CΔ to UΔ (NPO) (N750) and SL | 1 (T.C. Type) |
| D | | ±0.5 pF | 1, 1.5, 2, 3, 4, 5, 6, 7, 8, 9, 10 | | | |
| F | | ±1.0 pF | 10 | | | |
| J | > 10 pF | ±5 % | E24 | Within Capacitance Range, E-Series Numbers ×10 ⁿ | B (X7R) F (Y5V) | 2 (Hi-K Type) |
| K | | ±10 % | E12 | | | |
| K | ±10 % | E12 | | | | |
| M | ±20 % | E6 | | | | |
| Z | +80, -20 % | E6 | | | | |

■ E-Series Numbers

| E3 | 1 | | | | 2.2 | | | | 4.7 | | | | | | | | | | | | | | | |
|-----|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| E6 | 1 | | 1.5 | | 2.2 | | 3.3 | | 4.7 | | 6.8 | | | | | | | | | | | | | |
| E12 | 1 | 1.2 | 1.5 | 1.8 | 2.2 | 2.7 | 3.3 | 3.9 | 4.7 | 5.6 | 6.8 | 8.2 | | | | | | | | | | | | |
| E24 | 1 | 1.1 | 1.2 | 1.3 | 1.5 | 1.6 | 1.8 | 2 | 2.2 | 2.4 | 2.7 | 3 | 3.3 | 3.6 | 3.9 | 4.3 | 4.7 | 5.1 | 5.6 | 6.2 | 6.8 | 7.5 | 8.2 | 9.1 |

■ Temperature Coefficient of Class 1 Capacitors/T.C. Tolerance

(ppm/°C)

| Temp. Coeff. Code. | Cap. | CΔ (NP0) | PΔ (N150) | RΔ (N220) | SΔ (N330) | TΔ (N470) | UΔ (N750) | SL |
|--------------------|--------|----------|-----------|-----------|-----------|-----------|-----------|---------------|
| | | T.C. | T.C. | T.C. | T.C. | T.C. | T.C. | T.C. |
| T.C. Tol. | ≤ 2 pF | CK(±250) | PK(±250) | RK(±250) | SK(±250) | TK(±250) | UK(±250) | +350 to -1000 |
| | 3 pF | CJ(±120) | PJ(±120) | RJ(±120) | SJ(±120) | TJ(±120) | UJ(±120) | +350 to -1000 |
| | ≥ 4 pF | CH(±60) | PH(±60) | RH(±60) | SH(±60) | TH(±60) | UJ(±120) | +350 to -1000 |

■ Temperature Characteristics of Class 2 Capacitors


| Temp. Char. | Capacitance Change | | Measurement Temperature Range | Reference Temperature |
|-------------|-----------------------|---------------------------|-------------------------------|-----------------------|
| | No DC Voltage Applied | 1/2 Rated Voltage Applied | | |
| B (X7R) | ±10 % max. | +10, -30 % max. | -25 to 85 °C | 20 °C |
| F (Y5V) | +30, -80 % max. | +30, -95 % max. | -25 to 85 °C | 20 °C |

■ Specifications


| Characteristics | Specifications | | | Test Methods |
|--|--|---|----------------------------------|--|
| | Class 1 (T.C. Type) | Class 2 (Hi-K Type) | | |
| | CA to UA, SL | B(X7R) | F(Y5V) | |
| Operating Temperature Range | -55 to 125 °C* | | -25 to 85 °C | — |
| Rated Voltage | 50 VDC | 50 VDC, 25 VDC 16 VDC, 10 VDC | | — |
| Dielectric Withstanding Voltage | No break down | | | Test Voltage Class 1: Rated Voltage x3 Class 2: Rated Voltage x2.5 Electrification time : 1 to 5 s Limit surge current: 50 mA max. |
| Insulation Resistance(IR) | IR ≥ 10000MΩ | IR ≥ 10000MΩ or 500/C (MΩ) whichever is less [C: Rated capacitance in μF] | | Measurement Voltage: Rated Voltage Electrification time : 60 ± 5 s (Electrification time of 10VDC is 2 minutes) Limit surge current: 50 mA max. |
| Capacitance | Within the specified tolerance | | | Standard Temperature : 20 °C Measurement |
| Q Factor or Dissipation Factor (tan δ) | Capacitance < 30 pF Q ≥ 400+20 C*** 30 pF ≤ Cap. ≤ 1000 pF Q ≥ 1000 Capacitance > 1000 pF (tan δ) ≤ 0.002 | Temperature Characteristics | | (1) Class 1 (T.C. Type) |
| | | Rated Voltage | B | F |
| | 50 VDC | tan δ ≤ 0.025 | tan δ ≤ 0.05 | C ≤ 1000 pF 1 MHz ± 10 % 0.5-5 Vrms |
| | 25 VDC | tan δ ≤ 0.025 | tan δ ≤ 0.05 (tan δ ≤ 0.07)** | C > 1000 pF 1 kHz ± 10 % |
| | 16 VDC | tan δ ≤ 0.025 (tan δ ≤ 0.035)** | tan δ ≤ 0.07 | (2) Class 2 (Hi-K Type) |
| | 10 VDC | tan δ ≤ 0.05 | tan δ ≤ 0.125 | Pretreatment : 150+0/-10 °C for 1 hour and then shall be stored in a room temperature for 48 ± 4 hours, before initial measurement. |
| | | | | Frequency Voltage |
| | | | | 1 kHz ± 10 % 1.0 ± 0.2 Vrms |

* Operating Temperature Range: -25 to 85 °C for capacitance range of 5100 to 10000 pF, NP0, Type 13.
 ** Specified by individual Specification
 *** Nominal capacitance value in pF

Minimum Q at 1 MHz

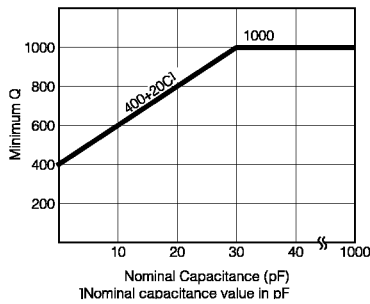

Minimum Insulation Resistance




- Capacitance Range (in pF)
- [Size Code "10" Type/"0402"]

| Temp. Char. Rated Voltage Cap. (pF) | Temp. Char. Rated Voltage | | | | | | |
|---|------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|
| | CΔ (NPO) | SL (50 V) | PΔ (N150) | RΔ (N220) | SΔ (N330) | TΔ (N470) | UΔ (N750) |
| 0.5 | | | | | | | |
| 1 | | | | | | | |
| 1.5 | | | | | | | |
| 2 | | | | | | | |
| 3 | | | | | | | |
| 4 | | | | | | | |
| 5 | | | | | | | |
| 6 | | | | | | | |
| 7 | | | | | | | |
| 8 | | | | | | | |
| 9 | | | | | | | |
| 10 | | | | | | | |
| 11 | | | | | | | |
| 12 | | | | | | | |
| 13 | | | | | | | |
| 15 | | | | | | | |
| 16 | | | | | | | |
| 18 | | | | | | | |
| 20 | | | | | | | |
| 22 | | | | | | | |
| 24 | | | | | | | |
| 27 | | | | | | | |
| 30 | | | | | | | |
| 33 | | | | | | | |
| 36 | | | | | | | |
| 39 | | | | | | | |
| 43 | | | | | | | |
| 47 | | | | | | | |
| 51 | | | | | | | |
| 56 | | | | | | | |
| 62 | | | | | | | |
| 68 | | | | | | | |
| 75 | | | | | | | |
| 82 | | | | | | | |
| 91 | | | | | | | |
| 100 | | | | | | | |
| 110 | | | | | | | |
| 120 | | | | | | | |
| 130 | | | | | | | |
| 150 | | | | | | | |
| 160 | | | | | | | |
| 180 | | | | | | | |
| 200 | | | | | | | |
| 220 | | | | | | | |

| Temp. Char. Rated Voltage Cap. (pF) | Temp. Char. Rated Voltage | | | Temp. Char. Rated Voltage | | |
|---|------------------------------|------|------|------------------------------|------|------|
| | B/X7R | | | F/Y5V | | |
| | 50 V | 25 V | 16 V | 50 V | 25 V | 16 V |
| 100 | | | | | | |
| 120 | | | | | | |
| 150 | | | | | | |
| 180 | | | | | | |
| 220 | | | | | | |
| 270 | | | | | | |
| 330 | | | | | | |
| 390 | | | | | | |
| 470 | | | | | | |
| 560 | | | | | | |
| 680 | | | | | | |
| 820 | | | | | | |
| 1000 | | | | | | |
| 1200 | | | | | | |
| 1500 | | | | | | |
| 1800 | | | | | | |
| 2200 | | | | | | |
| 2700 | | | | | | |
| 3300 | | | | | | |
| 3900 | | | | | | |
| 4700 | | | | | | |
| 5600 | | | | | | |
| 6800 | | | | | | |
| 8200 | | | | | | |
| 10000 | | | | | | |
| 12000 | | | | | | |
| 15000 | | | | | | |
| 18000 | | | | | | |
| 22000 | | | | | | |
| 27000 | | | | | | |
| 33000 | | | | | | |
| 39000 | | | | | | |
| 47000 | | | | | | |
| 56000 | | | | | | |
| 68000 | | | | | | |
| 82000 | | | | | | |
| 100000 | | | | | | |

■ Dimensions in mm (not to scale)
[10 Type] [0402(EIA)]



Panasonic

Multilayer Ceramic Capacitors (For General)


- Capacitance Range (in pF)
- [Size Code "11" Type/ "0603" (EIA)]

| Temp. Char. Rated Voltage Cap. (pF) | CΔ (NPO) | | SL | PΔ (N150) | RΔ (N220) | SΔ (N330) | TΔ (N470) | UΔ (N750) |
|---|----------|------|------|-----------|-----------|-----------|-----------|-----------|
| | 50 V | 50 V | 50 V | 50 V | 50 V | 50 V | 50 V | 50 V |
| 0.5 | | | | | | | | |
| 1 | | | | | | | | |
| 1.5 | | | | | | | | |
| 2 | | | | | | | | |
| 3 | | | | | | | | |
| 4 | | | | | | | | |
| 5 | | | | | | | | |
| 6 | | | | | | | | |
| 7 | | | | | | | | |
| 8 | | | | | | | | |
| 9 | | | | | | | | |
| 10 | | | | | | | | |
| 11 | | | | | | | | |
| 12 | | | | | | | | |
| 13 | | | | | | | | |
| 15 | | | | | | | | |
| 16 | | | | | | | | |
| 18 | | | | | | | | |
| 20 | | | | | | | | |
| 22 | | | | | | | | |
| 24 | | | | | | | | |
| 27 | | | | | | | | |
| 30 | | | | | | | | |
| 33 | | | | | | | | |
| 36 | | | | | | | | |
| 39 | | | | | | | | |
| 43 | | | | | | | | |
| 47 | | | | | | | | |
| 51 | | | | | | | | |
| 56 | | | | | | | | |
| 62 | | | | | | | | |
| 68 | | | | | | | | |
| 75 | | | | | | | | |
| 82 | | | | | | | | |
| 91 | | | | | | | | |
| 100 | | | | | | | | |
| 110 | | | | | | | | |
| 120 | | | | | | | | |
| 130 | | | | | | | | |
| 150 | | | | | | | | |
| 160 | | | | | | | | |
| 180 | | | | | | | | |
| 200 | | | | | | | | |
| 220 | | | | | | | | |
| 240 | | | | | | | | |
| 270 | | | | | | | | |
| 300 | | | | | | | | |
| 330 | | | | | | | | |
| 360 | | | | | | | | |
| 390 | | | | | | | | |
| 430 | | | | | | | | |
| 470 | | | | | | | | |
| 510 | | | | | | | | |
| 560 | | | | | | | | |
| 620 | | | | | | | | |
| 680 | | | | | | | | |
| 750 | | | | | | | | |
| 820 | | | | | | | | |
| 910 | | | | | | | | |
| 1000 | | | | | | | | |
| 1100 | | | | | | | | |
| 1200 | | | | | | | | |

| Temp. Char. Rated Voltage Cap. (pF) | B/X7R | | | | F/Y5V | | | |
|---|-------|------|------|-------|-------|------|------|-------|
| | 50 V | 25 V | 16 V | 6-10V | 50 V | 25 V | 16 V | 6-10V |
| 220 | | | | | | | | |
| 270 | | | | | | | | |
| 330 | | | | | | | | |
| 390 | | | | | | | | |
| 470 | | | | | | | | |
| 560 | | | | | | | | |
| 680 | | | | | | | | |
| 820 | | | | | | | | |
| 1000 | | | | | | | | |
| 1200 | | | | | | | | |
| 1500 | | | | | | | | |
| 1800 | | | | | | | | |
| 2200 | | | | | | | | |
| 2700 | | | | | | | | |
| 3300 | | | | | | | | |
| 3900 | | | | | | | | |
| 4700 | | | | | | | | |
| 5600 | | | | | | | | |
| 6800 | | | | | | | | |
| 8200 | | | | | | | | |
| 10000 | | | | | | | | |
| 12000 | | | | | | | | |
| 15000 | | | | | | | | |
| 18000 | | | | | | | | |
| 22000 | | | | | | | | |
| 27000 | | | | | | | | |
| 33000 | | | | | | | | |
| 39000 | | | | | | | | |
| 47000 | | | | | | | | |
| 56000 | | | | | | | | |
| 68000 | | | | | | | | |
| 82000 | | | | | | | | |
| 100000 | | | | | | | | |
| 120000 | | | | | | | | |
| 150000 | | | | | | | | |
| 180000 | | | | | | | | |
| 220000 | | | | | | | | |
| 270000 | | | | | | | | |
| 330000 | | | | | | | | |
| 390000 | | | | | | | | |
| 470000 | | | | | | | | |
| 560000 | | | | | | | | |
| 680000 | | | | | | | | |
| 820000 | | | | | | | | |
| 1000000 | | | | | | | | |

* Under development

- Dimensions in mm (not to scale)
- [11 Type] [0603 (EIA)]




Design and Specifications are subject to change without notice. Ask factory for technical specifications before purchase and/or use. Whenever a doubt about safety issues arises from this product, please inform us immediately for technical consultation.

- Capacitance Range (in pF)
- [Size Code "12" Type/ "0805" (EIA)]

| Temp. Char. Rated Voltage | CΔ (NP0) | | SL | | PΔ (N150) | | RΔ (N220) | | SΔ (N330) | | TΔ (N470) | | UΔ (N750) | |
|------------------------------|----------|------|------|------|-----------|------|-----------|------|-----------|------|-----------|------|-----------|------|
| | 50 V | 50 V | 50 V | 50 V | 50 V | 50 V | 50 V | 50 V | 50 V | 50 V | 50 V | 50 V | 50 V | 50 V |
| 0.5 | | | | | | | | | | | | | | |
| 1 | | | | | | | | | | | | | | |
| 1.5 | | | | | | | | | | | | | | |
| 2 | | | | | | | | | | | | | | |
| 3 | | | | | | | | | | | | | | |
| 4 | | | | | | | | | | | | | | |
| 5 | | | | | | | | | | | | | | |
| 6 | | | | | | | | | | | | | | |
| 7 | | | | | | | | | | | | | | |
| 8 | | | | | | | | | | | | | | |
| 9 | | | | | | | | | | | | | | |
| 10 | | | | | | | | | | | | | | |
| 11 | | | | | | | | | | | | | | |
| 12 | | | | | | | | | | | | | | |
| 13 | | | | | | | | | | | | | | |
| 15 | | | | | | | | | | | | | | |
| 16 | | | | | | | | | | | | | | |
| 18 | | | | | | | | | | | | | | |
| 20 | | | | | | | | | | | | | | |
| 22 | | | | | | | | | | | | | | |
| 24 | | | | | | | | | | | | | | |
| 27 | | | | | | | | | | | | | | |
| 30 | | | | | | | | | | | | | | |
| 33 | | | | | | | | | | | | | | |
| 36 | | | | | | | | | | | | | | |
| 39 | | | | | | | | | | | | | | |
| 43 | | | | | | | | | | | | | | |
| 47 | | | | | | | | | | | | | | |
| 51 | | | | | | | | | | | | | | |
| 56 | | | | | | | | | | | | | | |
| 62 | | | | | | | | | | | | | | |
| 68 | | | | | | | | | | | | | | |
| 75 | | | | | | | | | | | | | | |
| 82 | | | | | | | | | | | | | | |
| 91 | | | | | | | | | | | | | | |
| 100 | | | | | | | | | | | | | | |
| 110 | | | | | | | | | | | | | | |
| 120 | | | | | | | | | | | | | | |
| 130 | | | | | | | | | | | | | | |
| 150 | | | | | | | | | | | | | | |
| 160 | | | | | | | | | | | | | | |
| 180 | | | | | | | | | | | | | | |
| 200 | | | | | | | | | | | | | | |
| 220 | | | | | | | | | | | | | | |
| 240 | | | | | | | | | | | | | | |
| 270 | | | | | | | | | | | | | | |
| 300 | | | | | | | | | | | | | | |
| 330 | | | | | | | | | | | | | | |
| 360 | | | | | | | | | | | | | | |
| 390 | | | | | | | | | | | | | | |
| 430 | | | | | | | | | | | | | | |
| 470 | | | | | | | | | | | | | | |
| 510 | | | | | | | | | | | | | | |
| 560 | | | | | | | | | | | | | | |
| 620 | | | | | | | | | | | | | | |
| 680 | | | | | | | | | | | | | | |
| 750 | | | | | | | | | | | | | | |
| 820 | | | | | | | | | | | | | | |
| 910 | | | | | | | | | | | | | | |
| 1000 | | | | | | | | | | | | | | |
| 1100 | | | | | | | | | | | | | | |
| 1200 | | | | | | | | | | | | | | |
| 1300 | | | | | | | | | | | | | | |
| 1500 | | | | | | | | | | | | | | |
| 1600 | | | | | | | | | | | | | | |
| 1800 | | | | | | | | | | | | | | |
| 2000 | | | | | | | | | | | | | | |
| 2200 | | | | | | | | | | | | | | |
| 2400 | | | | | | | | | | | | | | |
| 2700 | | | | | | | | | | | | | | |

| Temp. Char. Rated Voltage | B/X7R | | | | F/Y5V | | | |
|------------------------------|-------|------|------|--------|-------|------|------|--------|
| | 50 V | 25 V | 16 V | 6-10 V | 50 V | 25 V | 16 V | 6-10 V |
| 220 | | | | | | | | |
| 270 | | | | | | | | |
| 330 | | | | | | | | |
| 390 | | | | | | | | |
| 470 | | | | | | | | |
| 560 | | | | | | | | |
| 680 | | | | | | | | |
| 820 | | | | | | | | |
| 1000 | | | | | | | | |
| 1200 | | | | | | | | |
| 1500 | | | | | | | | |
| 1800 | | | | | | | | |
| 2200 | | | | | | | | |
| 2700 | | | | | | | | |
| 3300 | | | | | | | | |
| 3900 | | | | | | | | |
| 4700 | | | | | | | | |
| 5600 | | | | | | | | |
| 6800 | | | | | | | | |
| 8200 | | | | | | | | |
| 10000 | | | | | | | | |
| 12000 | | | | | | | | |
| 15000 | | | | | | | | |
| 18000 | | | | | | | | |
| 22000 | | | | | | | | |
| 27000 | | | | | | | | |
| 33000 | | | | | | | | |
| 39000 | | | | | | | | |
| 47000 | | | | | | | | |
| 56000 | | | | | | | | |
| 68000 | | | | | | | | |
| 82000 | | | | | | | | |
| 100000 | | | | | | | | |
| 120000 | | | | | | | | |
| 150000 | | | | | | | | |
| 180000 | | | | | | | | |
| 220000 | | | | | | | | |
| 270000 | | | | | | | | |
| 330000 | | | | | | | | |
| 390000 | | | | | | | | |
| 470000 | | | | | | | | |
| 560000 | | | | | | | | |
| 680000 | | | | | | | | |
| 820000 | | | | | | | | |
| 1000000 | | | | | | | | |
| 1200000 | | | | | | | | |
| 1500000 | | | | | | | | |
| 1800000 | | | | | | | | |
| 2200000 | | | | | | | | |
| 2700000 | | | | | | | | |
| 3300000 | | | | | | | | |
| 3900000 | | | | | | | | |
| 4700000 | | | | | | | | |

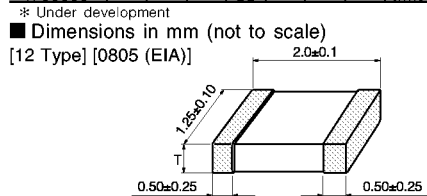

■ Thickness "T"

| T (mm) |
|-----------|
| 0.6±0.1 |
| 0.85±0.10 |
| 1.25±0.10 |


- Capacitance Range (in pF)
- [Size Code "13" Type/ "1206" (EIA)]

| Cap. (pF) | Temp. Char. Rated Voltage | CA | SL | PA | RA | SA | TA | UA |
|-----------|------------------------------|-------|--------|--------|--------|--------|--------|--------|
| | | (NP0) | (50 V) | (N150) | (N220) | (N330) | (N470) | (N750) |
| 240 | | | | | | | | |
| 270 | | | | | | | | |
| 300 | | | | | | | | |
| 330 | | | | | | | | |
| 360 | | | | | | | | |
| 390 | | | | | | | | |
| 430 | | | | | | | | |
| 470 | | | | | | | | |
| 510 | | | | | | | | |
| 560 | | | | | | | | |
| 620 | | | | | | | | |
| 680 | | | | | | | | |
| 750 | | | | | | | | |
| 820 | | | | | | | | |
| 910 | | | | | | | | |
| 1000 | | | | | | | | |
| 1100 | | | | | | | | |
| 1200 | | | | | | | | |
| 1300 | | | | | | | | |
| 1500 | | | | | | | | |
| 1600 | | | | | | | | |
| 1800 | | | | | | | | |
| 2000 | | | | | | | | |
| 2200 | | | | | | | | |
| 2400 | | | | | | | | |
| 2700 | | | | | | | | |
| 3000 | | | | | | | | |
| 3300 | | | | | | | | |
| 3600 | | | | | | | | |
| 3900 | | | | | | | | |
| 4300 | | | | | | | | |
| 4700 | | | | | | | | |
| 5100 | | | | | | | | |
| 5600 | | | | | | | | |
| 6200 | | | | | | | | |
| 6800 | | | | | | | | |
| 7500 | | | | | | | | |
| 8200 | | | | | | | | |
| 9100 | | | | | | | | |
| 10000 | | | | | | | | |

| Cap. (pF) | Temp. Char. Rated Voltage | B/X7R | | | | F/Y5V | | | |
|-----------|------------------------------|-------|------|------|--------|-------|------|------|--------|
| | | 50 V | 25 V | 16 V | 6-10 V | 50 V | 25 V | 16 V | 6-10 V |
| 68000 | | | | | | | | | |
| 82000 | | | | | | | | | |
| 100000 | | | | | | | | | |
| 120000 | | | | | | | | | |
| 150000 | | | | | | | | | |
| 180000 | | | | | | | | | |
| 220000 | | | | | | | | | |
| 270000 | | | | | | | | | |
| 330000 | | | | | | | | | |
| 390000 | | | | | | | | | |
| 470000 | | | | | | | | | |
| 560000 | | | | | | | | | |
| 680000 | | | | | | | | | |
| 820000 | | | | | | | | | |
| 1000000 | | | | | | | | | |
| 1200000 | | | | | | | | | |
| 1500000 | | | | | * | | | | |
| 1800000 | | | | | | | | | |
| 2200000 | | | | | | | | | |
| 2700000 | | | | | | | | | |
| 3300000 | | | | | | | | | |
| 3900000 | | | | | | | | | |
| 4700000 | | | | | | | | | |
| 5600000 | | | | | | | | | |
| 6800000 | | | | | | | | | |
| 8200000 | | | | | | | | | |
| 10000000 | | | | | | | | | |

* Under development

- Dimensions in mm (not to scale)
- [13 Type] [1206 (EIA)]



- Thickness "T"

| | T (mm) |
|--|-----------|
| | 0.6±0.1 |
| | 0.85±0.10 |
| | 1.15±0.10 |
| | 1.6±0.2 |

• T 1.6mm : L=3.20±0.20, W=1.60±0.20

■ Standard Products for "10" Type (EIA "0402" Type), Taped Version [Rated Voltage 50 VDC]

| Capacitance (pF) | Capacitance Tolerance | CA (NP0) | | SL | | PA (N150) | | RA (N220) | | SA (N330) | | TA (N470) | | UA (N750) | |
|------------------|--------------------------|--------------|-------------|--------------|-------------|--------------|-------------|--------------|-------------|--------------|-------------|--------------|--------------|--------------|-------------|
| | | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) |
| 0.5 | ±0.25 pF (C) | ECUE1H0R5C□□ | 0.5 | ECUE1H0R5C□□ | 0.5 | ECUE1H0R5C□□ | 0.5 | ECUE1H0R5C□□ | 0.5 | ECUE1H0R5C□□ | 0.5 | ECUE1H0R5C□□ | 0.5 | ECUE1H0R5C□□ | 0.5 |
| 1 | ±0.25 pF (C) | ECUE1H010□□□ | 0.5 | ECUE1H010□□□ | 0.5 | ECUE1H010□□□ | 0.5 | ECUE1H010□□□ | 0.5 | ECUE1H010□□□ | 0.5 | ECUE1H010□□□ | 0.5 | ECUE1H010□□□ | 0.5 |
| 1.5 | | ECUE1H1R5□□□ | 0.5 | ECUE1H1R5□□□ | 0.5 | ECUE1H1R5□□□ | 0.5 | ECUE1H1R5□□□ | 0.5 | ECUE1H1R5□□□ | 0.5 | ECUE1H1R5□□□ | 0.5 | ECUE1H1R5□□□ | 0.5 |
| 2 | ±0.5 pF (D) | ECUE1H020□□□ | 0.5 | ECUE1H020□□□ | 0.5 | ECUE1H020□□□ | 0.5 | ECUE1H020□□□ | 0.5 | ECUE1H020□□□ | 0.5 | ECUE1H020□□□ | 0.5 | ECUE1H020□□□ | 0.5 |
| 3 | | ECUE1H030□□□ | 0.5 | ECUE1H030□□□ | 0.5 | ECUE1H030□□□ | 0.5 | ECUE1H030□□□ | 0.5 | ECUE1H030□□□ | 0.5 | ECUE1H030□□□ | 0.5 | ECUE1H030□□□ | 0.5 |
| 4 | ±0.5 pF (D) | ECUE1H040□□□ | 0.5 | ECUE1H040□□□ | 0.5 | ECUE1H040□□□ | 0.5 | ECUE1H040□□□ | 0.5 | ECUE1H040□□□ | 0.5 | ECUE1H040□□□ | 0.5 | ECUE1H040□□□ | 0.5 |
| 5 | | ECUE1H050□□□ | 0.5 | ECUE1H050□□□ | 0.5 | ECUE1H050□□□ | 0.5 | ECUE1H050□□□ | 0.5 | ECUE1H050□□□ | 0.5 | ECUE1H050□□□ | 0.5 | ECUE1H050□□□ | 0.5 |
| 6 | ±0.5 pF (D) | ECUE1H060□□□ | 0.5 | ECUE1H060□□□ | 0.5 | ECUE1H060□□□ | 0.5 | ECUE1H060□□□ | 0.5 | ECUE1H060□□□ | 0.5 | ECUE1H060□□□ | 0.5 | ECUE1H060□□□ | 0.5 |
| 7 | | ECUE1H070□□□ | 0.5 | ECUE1H070□□□ | 0.5 | ECUE1H070□□□ | 0.5 | ECUE1H070□□□ | 0.5 | ECUE1H070□□□ | 0.5 | ECUE1H070□□□ | 0.5 | ECUE1H070□□□ | 0.5 |
| 8 | ±0.5 pF (D) | ECUE1H080□□□ | 0.5 | ECUE1H080□□□ | 0.5 | ECUE1H080□□□ | 0.5 | ECUE1H080□□□ | 0.5 | ECUE1H080□□□ | 0.5 | ECUE1H080□□□ | 0.5 | ECUE1H080□□□ | 0.5 |
| 9 | | ECUE1H090□□□ | 0.5 | ECUE1H090□□□ | 0.5 | ECUE1H090□□□ | 0.5 | ECUE1H090□□□ | 0.5 | ECUE1H090□□□ | 0.5 | ECUE1H090□□□ | 0.5 | ECUE1H090□□□ | 0.5 |
| 10 | ±0.5 pF (D) or ±1 pF (F) | ECUE1H100□□□ | 0.5 | ECUE1H100□□□ | 0.5 | ECUE1H100□□□ | 0.5 | ECUE1H100□□□ | 0.5 | ECUE1H100□□□ | 0.5 | ECUE1H100□□□ | 0.5 | ECUE1H100□□□ | 0.5 |
| 11 | ±5 %*** (J) or ±10 % (K) | ECUE1H110□□□ | 0.5 | ECUE1H110□□□ | 0.5 | ECUE1H110□□□ | 0.5 | ECUE1H110□□□ | 0.5 | ECUE1H110□□□ | 0.5 | ECUE1H110□□□ | 0.5 | ECUE1H110□□□ | 0.5 |
| 12 | | ECUE1H120□□□ | 0.5 | ECUE1H120□□□ | 0.5 | ECUE1H120□□□ | 0.5 | ECUE1H120□□□ | 0.5 | ECUE1H120□□□ | 0.5 | ECUE1H120□□□ | 0.5 | ECUE1H120□□□ | 0.5 |
| 13 | ±5 %*** (J) or ±10 % (K) | ECUE1H130□□□ | 0.5 | ECUE1H130□□□ | 0.5 | ECUE1H130□□□ | 0.5 | ECUE1H130□□□ | 0.5 | ECUE1H130□□□ | 0.5 | ECUE1H130□□□ | 0.5 | ECUE1H130□□□ | 0.5 |
| 15 | | ECUE1H150□□□ | 0.5 | ECUE1H150□□□ | 0.5 | ECUE1H150□□□ | 0.5 | ECUE1H150□□□ | 0.5 | ECUE1H150□□□ | 0.5 | ECUE1H150□□□ | 0.5 | ECUE1H150□□□ | 0.5 |
| 16 | ±5 %*** (J) or ±10 % (K) | ECUE1H160□□□ | 0.5 | ECUE1H160□□□ | 0.5 | ECUE1H160□□□ | 0.5 | ECUE1H160□□□ | 0.5 | ECUE1H160□□□ | 0.5 | ECUE1H160□□□ | 0.5 | ECUE1H160□□□ | 0.5 |
| 18 | | ECUE1H180□□□ | 0.5 | ECUE1H180□□□ | 0.5 | ECUE1H180□□□ | 0.5 | ECUE1H180□□□ | 0.5 | ECUE1H180□□□ | 0.5 | ECUE1H180□□□ | 0.5 | ECUE1H180□□□ | 0.5 |
| 20 | ±5 %*** (J) or ±10 % (K) | ECUE1H200□□□ | 0.5 | ECUE1H200□□□ | 0.5 | ECUE1H200□□□ | 0.5 | ECUE1H200□□□ | 0.5 | ECUE1H200□□□ | 0.5 | ECUE1H200□□□ | 0.5 | ECUE1H200□□□ | 0.5 |
| 22 | | ECUE1H220□□□ | 0.5 | ECUE1H220□□□ | 0.5 | ECUE1H220□□□ | 0.5 | ECUE1H220□□□ | 0.5 | ECUE1H220□□□ | 0.5 | ECUE1H220□□□ | 0.5 | ECUE1H220□□□ | 0.5 |
| 24 | ±5 %*** (J) or ±10 % (K) | ECUE1H240□□□ | 0.5 | ECUE1H240□□□ | 0.5 | ECUE1H240□□□ | 0.5 | ECUE1H240□□□ | 0.5 | ECUE1H240□□□ | 0.5 | ECUE1H240□□□ | 0.5 | ECUE1H240□□□ | 0.5 |
| 27 | | ECUE1H270□□□ | 0.5 | ECUE1H270□□□ | 0.5 | ECUE1H270□□□ | 0.5 | ECUE1H270□□□ | 0.5 | ECUE1H270□□□ | 0.5 | ECUE1H270□□□ | 0.5 | ECUE1H270□□□ | 0.5 |
| 30 | ±5 %*** (J) or ±10 % (K) | ECUE1H300□□□ | 0.5 | ECUE1H300□□□ | 0.5 | ECUE1H300□□□ | 0.5 | ECUE1H300□□□ | 0.5 | ECUE1H300□□□ | 0.5 | ECUE1H300□□□ | 0.5 | ECUE1H300□□□ | 0.5 |
| 33 | | ECUE1H330□□□ | 0.5 | ECUE1H330□□□ | 0.5 | ECUE1H330□□□ | 0.5 | ECUE1H330□□□ | 0.5 | ECUE1H330□□□ | 0.5 | ECUE1H330□□□ | 0.5 | ECUE1H330□□□ | 0.5 |
| 36 | ±5 %*** (J) or ±10 % (K) | ECUE1H360□□□ | 0.5 | ECUE1H360□□□ | 0.5 | ECUE1H360□□□ | 0.5 | ECUE1H360□□□ | 0.5 | ECUE1H360□□□ | 0.5 | ECUE1H360□□□ | 0.5 | ECUE1H360□□□ | 0.5 |
| 39 | | ECUE1H390□□□ | 0.5 | ECUE1H390□□□ | 0.5 | ECUE1H390□□□ | 0.5 | ECUE1H390□□□ | 0.5 | ECUE1H390□□□ | 0.5 | ECUE1H390□□□ | 0.5 | ECUE1H390□□□ | 0.5 |
| 43 | ±5 %*** (J) or ±10 % (K) | ECUE1H430□□□ | 0.5 | ECUE1H430□□□ | 0.5 | | | | | | | | ECUE1H430□□□ | 0.5 | |
| 47 | | ECUE1H470□□□ | 0.5 | ECUE1H470□□□ | 0.5 | | | | | | | | ECUE1H470□□□ | 0.5 | |
| 51 | ±5 %*** (J) or ±10 % (K) | ECUE1H510□□□ | 0.5 | ECUE1H510□□□ | 0.5 | | | | | | | | ECUE1H510□□□ | 0.5 | |
| 56 | | ECUE1H560□□□ | 0.5 | ECUE1H560□□□ | 0.5 | | | | | | | | ECUE1H560□□□ | 0.5 | |
| 62 | ±5 %*** (J) or ±10 % (K) | ECUE1H620□□□ | 0.5 | ECUE1H620□□□ | 0.5 | | | | | | | | ECUE1H620□□□ | 0.5 | |
| 68 | | ECUE1H680□□□ | 0.5 | ECUE1H680□□□ | 0.5 | | | | | | | | ECUE1H680□□□ | 0.5 | |
| 75 | ±5 %*** (J) or ±10 % (K) | ECUE1H750□□□ | 0.5 | ECUE1H750□□□ | 0.5 | | | | | | | | ECUE1H750□□□ | 0.5 | |
| 82 | | ECUE1H820□□□ | 0.5 | ECUE1H820□□□ | 0.5 | | | | | | | | ECUE1H820□□□ | 0.5 | |
| 91 | ±5 %*** (J) or ±10 % (K) | ECUE1H910□□□ | 0.5 | ECUE1H910□□□ | 0.5 | | | | | | | | ECUE1H910□□□ | 0.5 | |
| 100 | | ECUE1H101□□□ | 0.5 | ECUE1H101□□□ | 0.5 | | | | | | | | ECUE1H101□□□ | 0.5 | |
| 110 | ±5 %*** (J) or ±10 % (K) | ECUE1H111□□□ | 0.5 | ECUE1H111□□□ | 0.5 | | | | | | | | ECUE1H111□□□ | 0.5 | |
| 120 | | ECUE1H121□□□ | 0.5 | ECUE1H121□□□ | 0.5 | | | | | | | | ECUE1H121□□□ | 0.5 | |
| 130 | ±5 %*** (J) or ±10 % (K) | ECUE1H131□□□ | 0.5 | ECUE1H131□□□ | 0.5 | | | | | | | | | | |
| 150 | | ECUE1H151□□□ | 0.5 | ECUE1H151□□□ | 0.5 | | | | | | | | | | |
| 160 | ±5 %*** (J) or ±10 % (K) | ECUE1H161□□□ | 0.5 | ECUE1H161□□□ | 0.5 | | | | | | | | | | |
| 180 | | ECUE1H181□□□ | 0.5 | ECUE1H181□□□ | 0.5 | | | | | | | | | | |
| 200 | ±5 %*** (J) or ±10 % (K) | ECUE1H201□□□ | 0.5 | ECUE1H201□□□ | 0.5 | | | | | | | | | | |
| 220 | | ECUE1H221□□□ | 0.5 | ECUE1H221□□□ | 0.5 | | | | | | | | | | |

(Packing Style Code)*

*Packaging Style Code: "E" for Taped Version (Taping pitch: 2 mm) and "X" for Bulk Type.
 **□: Capacitance Tolerance Codes.
 ***: Capacitance values of "E24" series and capacitance tolerance of ±5 % are available on special order.

■ Standard Products for "10" Type (EIA "0402" Type) , Taped Version

| Capacitance (pF) | Capacitance Tolerance | B/X7R | | | | | | Capacitance Tolerance | F/Y5V | | | | | |
|------------------|--------------------------|--------------|-------------|--------------|-------------|-------------------|-------------|-----------------------|--------------|-------------|--------------|-------------|--------------|-------------|
| | | 50 VDC | | 25 VDC | | 16 VDC | | | 50 VDC | | 25 VDC | | 16 VDC | |
| | | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) |
| 100 | | ECUE1H101□BC | 0.5 | ECUE1E101□BC | 0.5 | | | | | | | | | |
| 120 | | ECUE1H121KBQ | 0.5 | ECUE1E121KBQ | 0.5 | | | | | | | | | |
| 150 | | ECUE1H151□BC | 0.5 | ECUE1E151□BC | 0.5 | | | | | | | | | |
| 180 | | ECUE1H181KBQ | 0.5 | ECUE1E181KBQ | 0.5 | | | | | | | | | |
| 220 | | ECUE1H221□BC | 0.5 | ECUE1E221□BC | 0.5 | | | | | | | | | |
| 270 | | ECUE1H271KBQ | 0.5 | ECUE1E271KBQ | 0.5 | | | | | | | | | |
| 330 | | ECUE1H331□BC | 0.5 | ECUE1E331□BC | 0.5 | | | | | | | | | |
| 390 | | ECUE1H391KBQ | 0.5 | ECUE1E391KBQ | 0.5 | | | | | | | | | |
| 470 | | ECUE1H471□BC | 0.5 | ECUE1E471□BC | 0.5 | | | | | | | | | |
| 560 | | ECUE1H561KBQ | 0.5 | ECUE1E561KBQ | 0.5 | | | | | | | | | |
| 680 | | ECUE1H681□BC | 0.5 | ECUE1E681□BC | 0.5 | | | | | | | | | |
| 820 | | ECUE1H821KBQ | 0.5 | ECUE1E821KBQ | 0.5 | | | | | | | | | |
| 1000 | | ECUE1H102□BC | 0.5 | ECUE1E102□BC | 0.5 | | | | ECUE1H102ZFQ | 0.5 | ECUE1E102ZFQ | 0.5 | | |
| 1200 | ±10 % | ECUE1H122KBQ | 0.5 | ECUE1E122KBQ | 0.5 | | | | | | | | | |
| 1500 | (K) | ECUE1H152□BC | 0.5 | ECUE1E152□BC | 0.5 | | | | ECUE1H152ZFQ | 0.5 | ECUE1E152ZFQ | 0.5 | | |
| 1800 | or | ECUE1H182KBQ | 0.5 | ECUE1E182KBQ | 0.5 | | | | | | | | | |
| 2200 | ±20 % | ECUE1H222□BC | 0.5 | ECUE1E222□BC | 0.5 | | | | ECUE1H222ZFQ | 0.5 | ECUE1E222ZFQ | 0.5 | | |
| 2700 | (M) | ECUE1H272KBQ | 0.5 | ECUE1E272KBQ | 0.5 | | | | | | | | | |
| 3300 | | ECUE1H332□BC | 0.5 | ECUE1E332□BC | 0.5 | | | | ECUE1H332ZFQ | 0.5 | ECUE1E332ZFQ | 0.5 | | |
| 3900 | | ECUE1H392KBQ | 0.5 | ECUE1E392KBQ | 0.5 | | | | | | | | | |
| 4700 | (Packaging Style Code)** | | | ECUE1E472□BC | 0.5 | | | | ECUE1H472ZFQ | 0.5 | ECUE1E472ZFQ | 0.5 | | |
| 5600 | | | | ECUE1E562KBQ | 0.5 | ECUE1C562KBQ | 0.5 | | | | | | | |
| 6800 | | | | ECUE1E682□BC | 0.5 | ECUE1C682□BC | 0.5 | | ECUE1H682ZFQ | 0.5 | ECUE1E682ZFQ | 0.5 | | |
| 8200 | | | | | | ECUE1C822KBQ | 0.5 | | | | | | | |
| 10000 | | | | | | ECUE1C103□BC | 0.5 | | ECUE1H103ZFQ | 0.5 | ECUE1E103ZFQ | 0.5 | | |
| 12000 | | | | | | ECUE1C123KBQ | 0.5 | | | | | | | |
| 15000 | | | | | | ECUE1C153□BC | 0.5 | | | | ECUE1E153ZFQ | 0.5 | ECUE1C153ZFQ | 0.5 |
| 18000 | | | | | | (Cap. Tol. Code)* | | | | | | | | |
| 22000 | | | | | | | | | | | ECUE1E223ZFQ | 0.5 | ECUE1C223ZFQ | 0.5 |
| 27000 | | | | | | | | | | | | | | |
| 33000 | | | | | | | | | | | | | ECUE1C333ZFQ | 0.5 |
| 39000 | | | | | | | | | | | | | | |
| 47000 | | | | | | | | | | | | | ECUE1C473ZFQ | 0.5 |
| 56000 | | | | | | | | | | | | | | |
| 68000 | | | | | | | | | | | | | ECUE1C683ZFQ | 0.5 |
| 82000 | | | | | | | | | | | | | | |
| 100000 | | | | | | | | | | | | | ECUE1C104ZFQ | 0.5 |

* □: Capacitance Tolerance Code.
 ** Packaging Styles Code: "E" for Taped Version (Taping pitch: 2mm) and "X" for Bulk Type

■ Standard Products for "11" Type (EIA "0603" Type), Taped Version [Rated Voltage 50 VDC]

| Capacitance (pF) | Capacitance Tolerance | CΔ (NPO) | | SL | | PΔ (N150) | | RΔ (N220) | | SΔ (N330) | | TΔ (N470) | | UΔ (N750) | | |
|------------------|--------------------------|--------------|--------------------|-------------|-------------|--------------|-------------|-------------------------|-------------|--------------|-------------|--------------|-------------|--------------|-------------|-----|
| | | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | |
| 0.5 | ±0.25 pF(C) | ECUV1H0R5CCV | 0.8 | ECUV1H0R5CV | 0.8 | ECUV1H0R5CPV | 0.8 | ECUV1H0R5CAV | 0.8 | ECUV1H0R5CSV | 0.8 | ECUV1H0R5CTV | 0.8 | ECUV1H0R5CUV | 0.8 | |
| 1 | ±0.25 pF (C) or (D) | ECUV1H010CV | 0.8 | ECUV1H010V | 0.8 | ECUV1H010PV | 0.8 | ECUV1H010RV | 0.8 | ECUV1H010SV | 0.8 | ECUV1H010TV | 0.8 | ECUV1H010UV | 0.8 | |
| 1.5 | | ECUV1H1R5CV | 0.8 | ECUV1H1R5V | 0.8 | ECUV1H1R5PV | 0.8 | ECUV1H1R5RV | 0.8 | ECUV1H1R5SV | 0.8 | ECUV1H1R5TV | 0.8 | ECUV1H1R5UV | 0.8 | |
| 2 | ±0.5 pF (D) | ECUV1H020CV | 0.8 | ECUV1H020V | 0.8 | ECUV1H020PV | 0.8 | ECUV1H020RV | 0.8 | ECUV1H020SV | 0.8 | ECUV1H020TV | 0.8 | ECUV1H020UV | 0.8 | |
| 3 | | ECUV1H030CV | 0.8 | ECUV1H030V | 0.8 | ECUV1H030PV | 0.8 | ECUV1H030RV | 0.8 | ECUV1H030SV | 0.8 | ECUV1H030TV | 0.8 | ECUV1H030UV | 0.8 | |
| 4 | ±0.5 pF (D) | ECUV1H040CV | 0.8 | ECUV1H040V | 0.8 | ECUV1H040PV | 0.8 | ECUV1H040RV | 0.8 | ECUV1H040SV | 0.8 | ECUV1H040TV | 0.8 | ECUV1H040UV | 0.8 | |
| 5 | | ECUV1H050CV | 0.8 | ECUV1H050V | 0.8 | ECUV1H050PV | 0.8 | ECUV1H050RV | 0.8 | ECUV1H050SV | 0.8 | ECUV1H050TV | 0.8 | ECUV1H050UV | 0.8 | |
| 6 | ±0.5 pF (D) | ECUV1H060CV | 0.8 | ECUV1H060V | 0.8 | ECUV1H060PV | 0.8 | ECUV1H060RV | 0.8 | ECUV1H060SV | 0.8 | ECUV1H060TV | 0.8 | ECUV1H060UV | 0.8 | |
| 7 | | ECUV1H070CV | 0.8 | ECUV1H070V | 0.8 | ECUV1H070PV | 0.8 | ECUV1H070RV | 0.8 | ECUV1H070SV | 0.8 | ECUV1H070TV | 0.8 | ECUV1H070UV | 0.8 | |
| 8 | | ECUV1H080CV | 0.8 | ECUV1H080V | 0.8 | ECUV1H080PV | 0.8 | ECUV1H080RV | 0.8 | ECUV1H080SV | 0.8 | ECUV1H080TV | 0.8 | ECUV1H080UV | 0.8 | |
| 9 | | ECUV1H090CV | 0.8 | ECUV1H090V | 0.8 | ECUV1H090PV | 0.8 | ECUV1H090RV | 0.8 | ECUV1H090SV | 0.8 | ECUV1H090TV | 0.8 | ECUV1H090UV | 0.8 | |
| 10 | ±0.5 pF (D) or ±1 pF (F) | ECUV1H100CV | 0.8 | ECUV1H100V | 0.8 | ECUV1H100PV | 0.8 | ECUV1H100RV | 0.8 | ECUV1H100SV | 0.8 | ECUV1H100TV | 0.8 | ECUV1H100UV | 0.8 | |
| 12 | ±5 % (J) or ±10 % (K) | ECUV1H120CV | 0.8 | ECUV1H120V | 0.8 | ECUV1H120PV | 0.8 | ECUV1H120RV | 0.8 | ECUV1H120SV | 0.8 | ECUV1H120TV | 0.8 | ECUV1H120UV | 0.8 | |
| 15 | | ECUV1H150CV | 0.8 | ECUV1H150V | 0.8 | ECUV1H150PV | 0.8 | ECUV1H150RV | 0.8 | ECUV1H150SV | 0.8 | ECUV1H150TV | 0.8 | ECUV1H150UV | 0.8 | |
| 18 | | ECUV1H180CV | 0.8 | ECUV1H180V | 0.8 | ECUV1H180PV | 0.8 | ECUV1H180RV | 0.8 | ECUV1H180SV | 0.8 | ECUV1H180TV | 0.8 | ECUV1H180UV | 0.8 | |
| 22 | | ECUV1H220CV | 0.8 | ECUV1H220V | 0.8 | ECUV1H220PV | 0.8 | ECUV1H220RV | 0.8 | ECUV1H220SV | 0.8 | ECUV1H220TV | 0.8 | ECUV1H220UV | 0.8 | |
| 27 | | ECUV1H270CV | 0.8 | ECUV1H270V | 0.8 | ECUV1H270PV | 0.8 | ECUV1H270RV | 0.8 | ECUV1H270SV | 0.8 | ECUV1H270TV | 0.8 | ECUV1H270UV | 0.8 | |
| 33 | | ECUV1H330CV | 0.8 | ECUV1H330V | 0.8 | ECUV1H330PV | 0.8 | ECUV1H330RV | 0.8 | ECUV1H330SV | 0.8 | ECUV1H330TV | 0.8 | ECUV1H330UV | 0.8 | |
| 39 | | ECUV1H390CV | 0.8 | ECUV1H390V | 0.8 | ECUV1H390PV | 0.8 | ECUV1H390RV | 0.8 | ECUV1H390SV | 0.8 | ECUV1H390TV | 0.8 | ECUV1H390UV | 0.8 | |
| 47 | | ECUV1H470CV | 0.8 | ECUV1H470V | 0.8 | ECUV1H470PV | 0.8 | ECUV1H470RV | 0.8 | ECUV1H470SV | 0.8 | ECUV1H470TV | 0.8 | ECUV1H470UV | 0.8 | |
| 56 | | ECUV1H560CV | 0.8 | ECUV1H560V | 0.8 | ECUV1H560PV | 0.8 | ECUV1H560RV | 0.8 | ECUV1H560SV | 0.8 | ECUV1H560TV | 0.8 | ECUV1H560UV | 0.8 | |
| 68 | | ECUV1H680CV | 0.8 | ECUV1H680V | 0.8 | ECUV1H680PV | 0.8 | ECUV1H680RV | 0.8 | ECUV1H680SV | 0.8 | ECUV1H680TV | 0.8 | ECUV1H680UV | 0.8 | |
| 82 | | ECUV1H820CV | 0.8 | ECUV1H820V | 0.8 | ECUV1H820PV | 0.8 | ECUV1H820RV | 0.8 | ECUV1H820SV | 0.8 | ECUV1H820TV | 0.8 | ECUV1H820UV | 0.8 | |
| 100 | | ECUV1H101CV | 0.8 | ECUV1H101V | 0.8 | ECUV1H101PV | 0.8 | ECUV1H101RV | 0.8 | ECUV1H101SV | 0.8 | ECUV1H101TV | 0.8 | ECUV1H101UV | 0.8 | |
| 120 | | ECUV1H121CV | 0.8 | ECUV1H121V | 0.8 | ECUV1H121PV | 0.8 | ECUV1H121RV | 0.8 | ECUV1H121SV | 0.8 | ECUV1H121TV | 0.8 | ECUV1H121UV | 0.8 | |
| 150 | | ECUV1H151CV | 0.8 | ECUV1H151V | 0.8 | ECUV1H151PV | 0.8 | ECUV1H151RV | 0.8 | ECUV1H151SV | 0.8 | ECUV1H151TV | 0.8 | ECUV1H151UV | 0.8 | |
| 180 | | ECUV1H181CV | 0.8 | ECUV1H181V | 0.8 | | | ECUV1H181RV | 0.8 | ECUV1H181SV | 0.8 | ECUV1H181TV | 0.8 | ECUV1H181UV | 0.8 | |
| 220 | | ECUV1H221CV | 0.8 | ECUV1H221V | 0.8 | | | (Packaging Style Code)* | | | | ECUV1H221TV | 0.8 | ECUV1H221UV | 0.8 | |
| 270 | ECUV1H271CV | 0.8 | ECUV1H271V | 0.8 | | | | | | | | ECUV1H271TV | 0.8 | ECUV1H271UV | 0.8 | |
| 330 | ECUV1H331CV | 0.8 | ECUV1H331V | 0.8 | | | | | | | | | ECUV1H331TV | 0.8 | ECUV1H331UV | 0.8 |
| 390 | ECUV1H391CV | 0.8 | ECUV1H391V | 0.8 | | | | | | | | | ECUV1H391TV | 0.8 | ECUV1H391UV | 0.8 |
| 470 | ECUV1H471CV | 0.8 | ECUV1H471V | 0.8 | | | | | | | | | ECUV1H471TV | 0.8 | ECUV1H471UV | 0.8 |
| 560 | ECUV1H561CV | 0.8 | ECUV1H561V | 0.8 | | | | | | | | | ECUV1H561TV | 0.8 | ECUV1H561UV | 0.8 |
| 680 | ECUV1H681CV | 0.8 | ECUV1H681V | 0.8 | | | | | | | | | ECUV1H681TV | 0.8 | ECUV1H681UV | 0.8 |
| 820 | ECUV1H821CV | 0.8 | ECUV1H821V | 0.8 | | | | | | | | | ECUV1H821TV | 0.8 | ECUV1H821UV | 0.8 |
| 1000 | ECUV1H102CV | 0.8 | ECUV1H102V | 0.8 | | | | | | | | | ECUV1H102TV | 0.8 | ECUV1H102UV | 0.8 |
| 1200 | | | (Cap. Tol. Code)** | ECUV1H122V | 0.8 | | | | | | | | ECUV1H122TV | 0.8 | ECUV1H122UV | 0.8 |

* Packaging Style Code "V" for Taped Version (Taping pitch: 4mm) and "X" for Bulk Type.
 **: □ Capacitance Tolerance Codes.
 ***: Capacitance values of "E24" series and capacitance tolerance of ±5% are available on special order.

■ Standard Products for "11" Type (EIA "0603" Type), Taped Version

| Capacitance (pF) | B/X7R | | | | | | | | F/Y5V | | | | | | | |
|------------------|-------------------------|-------------|--------------|-------------|--------------|-------------|--------------|-------------|---------------|-------------|--------------|-------------|--------------|-------------|--------------|-------------|
| | 50 VDC | | 25 VDC | | 16 VDC | | 10 VDC | | 50 VDC | | 25 VDC | | 16 VDC | | 10 VDC | |
| | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) |
| 220 | ECUV1H21□□0V | 0.8 | | | | | | | | | | | | | | |
| 270 | ECUV1H271K6V | 0.8 | | | | | | | | | | | | | | |
| 330 | ECUV1H331□□0V | 0.8 | | | | | | | | | | | | | | |
| 390 | ECUV1H391K6V | 0.8 | | | | | | | | | | | | | | |
| 470 | ECUV1H471□□0V | 0.8 | | | | | | | | | | | | | | |
| 560 | ECUV1H561K6V | 0.8 | | | | | | | | | | | | | | |
| 680 | ECUV1H681□□0V | 0.8 | | | | | | | | | | | | | | |
| 820 | ECUV1H821K6V | 0.8 | | | | | | | | | | | | | | |
| 1000 | ECJ1V81H10□□ | 0.8 | | | | | | | ECUV1H102ZFV | 0.8 | | | | | | |
| 1200 | ECJ1V81H122K | 0.8 | | | | | | | | | | | | | | |
| 1500 | ECJ1V81H153□ | 0.8 | | | | | | | ECUV1H153ZFFV | 0.8 | | | | | | |
| 1800 | ECJ1V81H182K | 0.8 | | | | | | | | | | | | | | |
| 2200 | ECJ1V81H222□ | 0.8 | | | | | | | ECUV1H222ZFFV | 0.8 | | | | | | |
| 2700 | ECJ1V81H272K | 0.8 | | | | | | | | | | | | | | |
| 3300 | ECJ1V81H333□ | 0.8 | | | | | | | ECUV1H333ZFFV | 0.8 | | | | | | |
| 3900 | ECJ1V81H392K | 0.8 | | | | | | | | | | | | | | |
| 4700 | ECJ1V81H472□ | 0.8 | | | | | | | ECUV1H472ZFFV | 0.8 | | | | | | |
| 5600 | ECJ1V81H562K | 0.8 | | | | | | | | | | | | | | |
| 6800 | ECJ1V81H683□ | 0.8 | | | | | | | ECUV1H683ZFFV | 0.8 | | | | | | |
| 8200 | ECJ1V81H822K | 0.8 | | | | | | | | | | | | | | |
| 10000 | ECJ1V81H103□ | 0.8 | ECJ1V81E103□ | 0.8 | ECJ1V81C103□ | 0.8 | | | ECJ1VF1H103Z | 0.8 | | | | | | |
| 12000 | ECJ1V81H123K | 0.8 | ECJ1V81E123K | 0.8 | ECJ1V81C123K | 0.8 | | | | | | | | | | |
| 15000 | ECJ1V81H153□ | 0.8 | ECJ1V81E153□ | 0.8 | ECJ1V81C153□ | 0.8 | | | ECJ1VF1H153Z | 0.8 | | | | | | |
| 18000 | (Cap. Tol. Code)** | | ECJ1V81E183K | 0.8 | ECJ1V81C183K | 0.8 | | | | | | | | | | |
| 22000 | | | ECJ1V81E223□ | 0.8 | ECJ1V81C223□ | 0.8 | | | ECJ1VF1H223Z | 0.8 | | | | | | |
| 27000 | | | ECJ1V81E273K | 0.8 | ECJ1V81C273K | 0.8 | | | | | | | | | | |
| 33000 | | | ECJ1V81E333□ | 0.8 | ECJ1V81C333□ | 0.8 | | | ECJ1VF1H333Z | 0.8 | | | | | | |
| 39000 | | | ECJ1V81E393K | 0.8 | ECJ1V81C393K | 0.8 | | | | | | | | | | |
| 47000 | | | ECJ1V81E473□ | 0.8 | ECJ1V81C473□ | 0.8 | | | ECJ1VF1H473Z | 0.8 | | | | | | |
| 56000 | (Packaging Style Code)* | | | | ECJ1V81C563K | 0.8 | | | | | | | | | | |
| 68000 | | | | | ECJ1V81C683□ | 0.8 | | | | | ECJ1VF1E683Z | 0.8 | | | | |
| 82000 | | | | | ECJ1V81C823K | 0.8 | | | | | | | | | | |
| 100000 | | | | | ECJ1V81C104□ | 0.8 | | | | | ECJ1VF1E104Z | 0.8 | ECJ1VF1C104Z | 0.8 | | |
| 150000 | | | | | | | ECJ1V81A154□ | 0.8 | | | | | ECJ1VF1C154Z | 0.8 | | |
| 220000 | | | | | | | ECJ1V81A224□ | 0.8 | | | | | ECJ1VF1C224Z | 0.8 | | |
| 330000 | | | | | | | | | | | | | ECJ1VF1C334Z | 0.8 | | |
| 470000 | | | | | | | | | | | | | ECJ1VF1C474Z | 0.8 | | |
| 680000 | | | | | | | | | | | | | | | | |
| 1000000 | | | | | | | | | | | | | | | ECJ1VF1A106Z | 0.8 |
| 1500000 | | | | | | | | | | | | | | | | |
| 2200000 | | | | | | | | | | | | | | | | |

*Packaging Styles Code: "V" for Taped Version (Taping pitch: 4 mm) and "X" for Bulk Type.
 **:□: Capacitance Tolerance Codes.

■ Standard Products for "12" Type (EIA "0805" Type), Taped Version [Rated Voltage 50 VDC]

| Capacitance (pF) | Capacitance Tolerance | CΔ (NPO) | | SL | | PΔ (N150) | | RΔ (N220) | | SΔ (N330) | | TΔ (N470) | | UΔ (N750) | |
|------------------|-----------------------------|--------------|-------------|-------------|-------------|--------------|-------------|--------------|-------------------------|--------------|-------------|--------------|-------------|--------------|-------------|
| | | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) |
| 0.5 | ±0.25 pF(C) | ECUV1H0R5CCN | 0.6 | ECUV1H0R5CN | 0.6 | ECUV1H0R5CPN | 0.6 | ECUV1H0R5CRN | 0.6 | ECUV1H0R5CSN | 0.6 | ECUV1H0R5CTN | 0.6 | ECUV1H0R5CUN | 0.6 |
| 1 | ±0.25 pF (C) or ±0.5 pF (D) | ECUV1H010CN | 0.6 | ECUV1H010N | 0.6 | ECUV1H010PN | 0.6 | ECUV1H010RN | 0.6 | ECUV1H010SN | 0.6 | ECUV1H010TN | 0.6 | ECUV1H010UN | 0.6 |
| 1.5 | | ECUV1H1R5CN | 0.6 | ECUV1H1R5N | 0.6 | ECUV1H1R5PN | 0.6 | ECUV1H1R5RN | 0.6 | ECUV1H1R5SN | 0.6 | ECUV1H1R5TN | 0.6 | ECUV1H1R5UN | 0.6 |
| 2 | ±0.5 pF (D) | ECUV1H020CN | 0.6 | ECUV1H020N | 0.6 | ECUV1H020PN | 0.6 | ECUV1H020RN | 0.6 | ECUV1H020SN | 0.6 | ECUV1H020TN | 0.6 | ECUV1H020UN | 0.6 |
| 3 | | ECUV1H030CN | 0.6 | ECUV1H030N | 0.6 | ECUV1H030PN | 0.6 | ECUV1H030RN | 0.6 | ECUV1H030SN | 0.6 | ECUV1H030TN | 0.6 | ECUV1H030UN | 0.6 |
| 4 | ±0.5 pF (D) | ECUV1H040CN | 0.6 | ECUV1H040N | 0.6 | ECUV1H040PN | 0.6 | ECUV1H040RN | 0.6 | ECUV1H040SN | 0.6 | ECUV1H040TN | 0.6 | ECUV1H040UN | 0.6 |
| 5 | | ECUV1H050CN | 0.6 | ECUV1H050N | 0.6 | ECUV1H050PN | 0.6 | ECUV1H050RN | 0.6 | ECUV1H050SN | 0.6 | ECUV1H050TN | 0.6 | ECUV1H050UN | 0.6 |
| 6 | ±0.5 pF (D) | ECUV1H060CN | 0.6 | ECUV1H060N | 0.6 | ECUV1H060PN | 0.6 | ECUV1H060RN | 0.6 | ECUV1H060SN | 0.6 | ECUV1H060TN | 0.6 | ECUV1H060UN | 0.6 |
| 7 | | ECUV1H070CN | 0.6 | ECUV1H070N | 0.6 | ECUV1H070PN | 0.6 | ECUV1H070RN | 0.6 | ECUV1H070SN | 0.6 | ECUV1H070TN | 0.6 | ECUV1H070UN | 0.6 |
| 8 | ±0.5 pF (D) | ECUV1H080CN | 0.6 | ECUV1H080N | 0.6 | ECUV1H080PN | 0.6 | ECUV1H080RN | 0.6 | ECUV1H080SN | 0.6 | ECUV1H080TN | 0.6 | ECUV1H080UN | 0.6 |
| 9 | | ECUV1H090CN | 0.6 | ECUV1H090N | 0.6 | ECUV1H090PN | 0.6 | ECUV1H090RN | 0.6 | ECUV1H090SN | 0.6 | ECUV1H090TN | 0.6 | ECUV1H090UN | 0.6 |
| 10 | ±0.5 pF (D) or ±1 pF (F) | ECUV1H100CN | 0.6 | ECUV1H100N | 0.6 | ECUV1H100PN | 0.6 | ECUV1H100RN | 0.6 | ECUV1H100SN | 0.6 | ECUV1H100TN | 0.6 | ECUV1H100UN | 0.6 |
| 12 | ±5%*** (J) or ±10% (K) | ECUV1H120CN | 0.6 | ECUV1H120N | 0.6 | ECUV1H120PN | 0.6 | ECUV1H120RN | 0.6 | ECUV1H120SN | 0.6 | ECUV1H120TN | 0.6 | ECUV1H120UN | 0.6 |
| 15 | | ECUV1H150CN | 0.6 | ECUV1H150N | 0.6 | ECUV1H150PN | 0.6 | ECUV1H150RN | 0.6 | ECUV1H150SN | 0.6 | ECUV1H150TN | 0.6 | ECUV1H150UN | 0.6 |
| 18 | ±5%*** (J) or ±10% (K) | ECUV1H180CN | 0.6 | ECUV1H180N | 0.6 | ECUV1H180PN | 0.6 | ECUV1H180RN | 0.6 | ECUV1H180SN | 0.6 | ECUV1H180TN | 0.6 | ECUV1H180UN | 0.6 |
| 22 | | ECUV1H220CN | 0.6 | ECUV1H220N | 0.6 | ECUV1H220PN | 0.6 | ECUV1H220RN | 0.6 | ECUV1H220SN | 0.6 | ECUV1H220TN | 0.6 | ECUV1H220UN | 0.6 |
| 27 | ±5%*** (J) or ±10% (K) | ECUV1H270CG | 0.6 | ECUV1H270G | 0.6 | ECUV1H270PN | 0.6 | ECUV1H270RN | 0.6 | ECUV1H270SN | 0.6 | ECUV1H270TN | 0.6 | ECUV1H270UN | 0.6 |
| 33 | | ECUV1H330CG | 0.6 | ECUV1H330G | 0.6 | ECUV1H330PN | 0.6 | ECUV1H330RN | 0.6 | ECUV1H330SN | 0.6 | ECUV1H330TN | 0.6 | ECUV1H330UN | 0.6 |
| 39 | ±5%*** (J) or ±10% (K) | ECUV1H390CG | 0.6 | ECUV1H390G | 0.6 | ECUV1H390PN | 0.6 | ECUV1H390RN | 0.6 | ECUV1H390SN | 0.6 | ECUV1H390TN | 0.6 | ECUV1H390UN | 0.6 |
| 47 | | ECUV1H470CG | 0.6 | ECUV1H470G | 0.6 | ECUV1H470PN | 0.6 | ECUV1H470RN | 0.6 | ECUV1H470SN | 0.6 | ECUV1H470TN | 0.6 | ECUV1H470UN | 0.6 |
| 56 | ±5%*** (J) or ±10% (K) | ECUV1H560CG | 0.6 | ECUV1H560G | 0.6 | ECUV1H560PN | 0.6 | ECUV1H560RN | 0.6 | ECUV1H560SN | 0.6 | ECUV1H560TN | 0.6 | ECUV1H560UN | 0.6 |
| 68 | | ECUV1H680CG | 0.6 | ECUV1H680G | 0.6 | ECUV1H680PN | 0.6 | ECUV1H680RN | 0.6 | ECUV1H680SN | 0.6 | ECUV1H680TN | 0.6 | ECUV1H680UN | 0.6 |
| 82 | ±5%*** (J) or ±10% (K) | ECUV1H820CG | 0.6 | ECUV1H820G | 0.6 | ECUV1H820PN | 0.6 | ECUV1H820RN | 0.6 | ECUV1H820SN | 0.6 | ECUV1H820TN | 0.6 | ECUV1H820UN | 0.6 |
| 100 | | ECUV1H101CG | 0.6 | ECUV1H101G | 0.6 | ECUV1H101PN | 0.6 | ECUV1H101RN | 0.6 | ECUV1H101SN | 0.6 | ECUV1H101TN | 0.6 | ECUV1H101UN | 0.6 |
| 120 | ±5%*** (J) or ±10% (K) | ECUV1H121CG | 0.6 | ECUV1H121G | 0.6 | ECUV1H121PN | 0.6 | ECUV1H121RN | 0.6 | ECUV1H121SN | 0.6 | ECUV1H121TN | 0.6 | ECUV1H121UN | 0.6 |
| 150 | | ECUV1H151CG | 0.6 | ECUV1H151G | 0.6 | ECUV1H151PN | 0.6 | ECUV1H151RN | 0.6 | ECUV1H151SN | 0.6 | ECUV1H151TN | 0.6 | ECUV1H151UN | 0.6 |
| 180 | ±5%*** (J) or ±10% (K) | ECUV1H181CG | 0.6 | ECUV1H181G | 0.6 | ECUV1H181PN | 0.6 | ECUV1H181RN | 0.6 | ECUV1H181SN | 0.6 | ECUV1H181TN | 0.6 | ECUV1H181UN | 0.6 |
| 220 | | ECUV1H221CG | 0.6 | ECUV1H221G | 0.6 | ECUV1H221PN | 0.6 | ECUV1H221RN | 0.6 | ECUV1H221SN | 0.6 | ECUV1H221TN | 0.6 | ECUV1H221UN | 0.6 |
| 270 | ±5%*** (J) or ±10% (K) | ECUV1H271CG | 0.6 | ECUV1H271G | 0.6 | ECUV1H271PN | 0.85 | ECUV1H271RN | 0.85 | ECUV1H271SN | 0.85 | ECUV1H271TN | 0.6 | ECUV1H271UN | 0.6 |
| 330 | | ECUV1H331CG | 0.6 | ECUV1H331G | 0.6 | ECUV1H331PN | 0.85 | ECUV1H331RN | 0.85 | ECUV1H331SN | 0.85 | ECUV1H331TN | 0.85 | ECUV1H331UN | 0.6 |
| 390 | ±5%*** (J) or ±10% (K) | ECUV1H391CG | 0.6 | ECUV1H391G | 0.6 | | ECUV1H391RN | 0.85 | ECUV1H391SN | 0.85 | ECUV1H391TN | 0.85 | ECUV1H391UN | 0.6 | |
| 470 | | ECUV1H471CX | 0.6 | ECUV1H471G | 0.6 | | | | ECUV1H471SN | 0.85 | ECUV1H471TN | 0.85 | ECUV1H471UN | 0.6 | |
| 560 | ±5%*** (J) or ±10% (K) | ECUV1H561CX | 0.6 | ECUV1H561G | 0.6 | | | | (Packaging Style Code)* | | | | ECUV1H561UN | 0.6 | |
| 680 | | ECUV1H681CX | 0.6 | ECUV1H681G | 0.6 | | | | | | | | ECUV1H681UN | 0.6 | |
| 820 | ±5%*** (J) or ±10% (K) | ECUV1H821CX | 0.6 | ECUV1H821X | 0.6 | | | | | | | | ECUV1H821UN | 0.6 | |
| 1000 | | ECUV1H102CX | 0.6 | ECUV1H102X | 0.6 | | | | | | | | ECUV1H102UN | 0.6 | |
| 1200 | ±5%*** (J) or ±10% (K) | ECUV1H122CX | 0.6 | ECUV1H122X | 0.6 | | | | | | | | ECUV1H122UN | 0.6 | |
| 1500 | | ECUV1H152CX | 0.6 | ECUV1H152X | 0.6 | | | | | | | | ECUV1H152UN | 0.6 | |
| 1800 | ±5%*** (J) or ±10% (K) | ECUV1H182CX | 0.6 | ECUV1H182X | 0.6 | | | | | | | | ECUV1H182UN | 0.6 | |
| 2200 | | ECUV1H222CX | 0.6 | ECUV1H222X | 0.6 | | | | | | | | ECUV1H222UN | 0.6 | |
| 2700 | ±5%*** (J) or ±10% (K) | ECUV1H272CX | 0.85 | ECUV1H272X | 0.6 | | | | | | | | ECUV1H272UN | 0.6 | |

(Cap. Tol. Code)**

* Packaging Style Code: "V" for Taped Version (Taping pitch: 4mm) and "X" for Bulk Type.

** □: Capacitance Tolerance Codes.
 ***: Capacitance values of "E24" series and capacitance tolerance of ±5% are available on special order.

Standard Products for "12" Type (EIA "0805" Type), Taped Version

| Capacitance (pF) | B/X7R | | | | | | | | F/Y5V | | | | | | | | |
|------------------|--------------------------------------|-------------|--------------|-------------|--------------|-------------|----------|-------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|------|
| | 50 VDC | | 25 VDC | | 16 VDC | | 10 VDC | | 50 VDC | | 25 VDC | | 16 VDC | | 10 VDC | | |
| | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | |
| 220 | | | | | | | | | | | | | | | | | |
| 270 | | | | | | | | | | | | | | | | | |
| 330 | | | | | | | | | | | | | | | | | |
| 390 | | | | | | | | | | | | | | | | | |
| 470 | | | | | | | | | | | | | | | | | |
| 560 | | | | | | | | | | | | | | | | | |
| 680 | | | | | | | | | | | | | | | | | |
| 820 | | | | | | | | | | | | | | | | | |
| 1000 | ECUV1H102□BN | 0.6 | | | | | | | | | | | | | | | |
| 1200 | ECUV1H122KBN | 0.6 | | | | | | | | | | | | | | | |
| 1500 | ECUV1H152□BN | 0.6 | | | | | | | | | | | | | | | |
| 1800 | ECUV1H182KBN | 0.6 | | | | | | | | | | | | | | | |
| 2200 | ECUV1H222□BN | 0.6 | | | | | | | | | | | | | | | |
| 2700 | ECUV1H272KBN | 0.6 | | | | | | | | | | | | | | | |
| 3300 | ECUV1H332□BN | 0.6 | | | | | | | | | | | | | | | |
| 3900 | ECUV1H392KBN | 0.6 | | | | | | | | | | | | | | | |
| 4700 | ECUV1H472□BG | 0.6 | | | | | | | | | | | | | | | |
| 5600 | ECUV1H562KBG | 0.6 | | | | | | | | | | | | | | | |
| 6800 | ECUV1H682□BG | 0.6 | | | | | | | | | | | | | | | |
| 8200 | ECUV1H822KBG | 0.6 | | | | | | | | | | | | | | | |
| 10000 | ECUV1H103□BG | 0.6 | | | | | | | | ECJ2VF1H103Z | 0.6 | | | | | | |
| 12000 | ECUV1H123K BX | 0.6 | | | | | | | | ECJ2VF1H153Z | 0.6 | | | | | | |
| 15000 | ECUV1H153□BX | 0.6 | | | | | | | | | | | | | | | |
| 18000 | ECUV1H183K BX | 0.6 | | | | | | | | | | | | | | | |
| 22000 | ECUV1H223□BX | 0.6 | | | | | | | | ECJ2VF1H223Z | 0.6 | | | | | | |
| 27000 | ECJ2VB1H273K | 0.85 | | | | | | | | | | | | | | | |
| 33000 | ECJ2VB1H333□ | 0.85 | | | | | | | | ECJ2VF1H333Z | 0.6 | | | | | | |
| 39000 | ECJ2VB1H393K | 0.85 | ECJ2VB1E393K | 0.85 | | | | | | | | | | | | | |
| 47000 | ECJ2VB1H473□ | 1.25 | ECJ2VB1E473□ | 0.85 | ECJ2VB1C473□ | 0.85 | | | | ECJ2VF1H473Z | 0.6 | | | | | | |
| 56000 | ECJ2VB1H563K | 1.25 | ECJ2VB1E563K | 0.85 | ECJ2VB1C563K | 0.85 | | | | | | | | | | | |
| 68000 | ECJ2VB1H683□ | 1.25 | ECJ2VB1E683□ | 0.85 | ECJ2VB1C683□ | 0.85 | | | | ECJ2VF1H683Z | 0.6 | ECJ2VF1E683Z | 0.6 | | | | |
| 82000 | ECJ2VB1H823K | 1.25 | ECJ2VB1E823K | 0.85 | ECJ2VB1C823K | 0.85 | | | | | | | | | | | |
| 100000 | ECJ2VB1H104□ | 1.25 | ECJ2VB1E104□ | 0.85 | ECJ2VB1C104□ | 0.85 | | | | ECJ2VF1H104Z | 0.85 | ECJ2VF1E104Z | 0.6 | ECJ2VF1C104Z | 0.6 | | |
| 120000 | (Cap. Tol. Code) ⁹⁹ | | ECJ2VB1E124□ | 1.25 | ECJ2VB1C124□ | 0.85 | | | | | | | | | | | |
| 150000 | | | ECJ2VB1E154□ | 1.25 | ECJ2VB1C154□ | 0.85 | | | | ECJ2VF1H154Z | 0.85 | ECJ2VF1E154Z | 0.6 | ECJ2VF1C154Z | 0.6 | | |
| 180000 | | | ECJ2VB1E184□ | 1.25 | ECJ2VB1C184□ | 0.85 | | | | | | | | | | | |
| 220000 | | | ECJ2VB1E224□ | 1.25 | ECJ2VB1C224□ | 0.85 | | | | ECJ2VF1H224Z | 0.85 | ECJ2VF1E224Z | 0.85 | ECJ2VF1C224Z | 0.6 | | |
| 330000 | (Packaging Style Code) ⁹⁸ | | | | ECJ2VB1C334□ | 1.25 | | | | | | ECJ2VF1E334Z | 1.25 | ECJ2VF1C334Z | 0.85 | | |
| 470000 | | | | | ECJ2VB1C474□ | 1.25 | | | | | | ECJ2VF1E474Z | 1.25 | ECJ2VF1C474Z | 0.85 | | |
| 680000 | | | | | | | | | | | | | | ECJ2VF1C684Z | 0.85 | | |
| 1000000 | | | | | | | | | | | | | | ECJ2VF1C105Z | 0.85 | | |
| 1500000 | | | | | | | | | | | | | | ECJ2VF1C155Z | 1.25 | | |
| 2200000 | | | | | | | | | | | | | | ECJ2VF1C225Z | 1.25 | | |
| 3300000 | | | | | | | | | | | | | | | | ECJ2VF1A335Z | 1.25 |
| 4700000 | | | | | | | | | | | | | | | | ECJ2VF1A475Z | 1.25 |
| 6800000 | | | | | | | | | | | | | | | | | |
| 10000000 | | | | | | | | | | | | | | | | | |

*Packaging Style Code: "V" for Taped Version (Taping pitch: 4 mm) and "X" for Bulk Type.
 **□: Capacitance Tolerance Codes.

■ Standard Products for "13" Type (EIA "1206" Type) , Taped Version [Rated Voltage 50 VDC]

| Capacitance (pF) | Capacitance Tolerance | CΔ (NPO) | | SL | | PΔ (N150) | | RΔ (N220) | | SΔ (N330) | | TΔ (N470) | | UΔ (N750) | |
|------------------|--|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|-------------|--------------------------|-------------|--------------------------|-------------|--------------------------|--------------------------|--------------------------|-------------|
| | | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) |
| 270 | ±5 % ^{***} (J) or ±10 % (K) | | | | | ECUV1H271□ _{PM} | 0.6 | ECUV1H271□ _{PM} | 0.6 | ECUV1H271□ _{SM} | 0.6 | ECUV1H271□ _{TM} | 0.6 | | |
| 330 | | | | | | ECUV1H331□ _{PM} | 0.6 | ECUV1H331□ _{PM} | 0.6 | ECUV1H331□ _{SM} | 0.6 | ECUV1H331□ _{TM} | 0.6 | | |
| 390 | | | | | | ECUV1H391□ _{PM} | 0.6 | ECUV1H391□ _{PM} | 0.6 | ECUV1H391□ _{SM} | 0.6 | ECUV1H391□ _{TM} | 0.6 | | |
| 470 | | | | | | ECUV1H471□ _{PM} | 0.6 | ECUV1H471□ _{PM} | 0.6 | ECUV1H471□ _{SM} | 0.6 | ECUV1H471□ _{TM} | 0.6 | | |
| 560 | | | | | | ECUV1H561□ _{PM} | 0.6 | ECUV1H561□ _{PM} | 0.6 | ECUV1H561□ _{SM} | 0.6 | ECUV1H561□ _{TM} | 0.6 | | |
| 680 | | | | | | ECUV1H681□ _{PM} | 0.85 | ECUV1H681□ _{PM} | 0.6 | ECUV1H681□ _{SM} | 0.6 | ECUV1H681□ _{TM} | 0.6 | | |
| 820 | | | | | | ECUV1H821□ _{PM} | 0.85 | ECUV1H821□ _{PM} | 0.85 | ECUV1H821□ _{SM} | 0.85 | ECUV1H821□ _{TM} | 0.6 | | |
| 1000 | | | | | | ECUV1H102□ _{PM} | 0.85 | ECUV1H102□ _{PM} | 0.85 | ECUV1H102□ _{SM} | 0.85 | ECUV1H102□ _{TM} | 0.85 | | |
| 1200 | | | | | | ECUV1H122□ _{PM} | 0.85 | ECUV1H122□ _{PM} | 0.85 | ECUV1H122□ _{SM} | 0.85 | ECUV1H122□ _{TM} | 0.85 | | |
| 1500 | | | | | | | | (Packaging Style Code)* | | ECUV1H152□ _{SM} | 0.85 | ECUV1H152□ _{TM} | 0.85 | | |
| 1800 | | | | | | | | | | | | | | | |
| 2200 | | | | | | | | | | | | | | | |
| 2700 | | | ECUV1H272□ _{CW} | 0.6 | | | | | | | | | | | |
| 3300 | | | ECUV1H332□ _{CW} | 0.6 | ECUV1H332□ _{TW} | 0.6 | | | | | | | | ECUV1H332□ _{JW} | 0.6 |
| 3900 | | | ECUV1H392□ _{CW} | 0.6 | ECUV1H392□ _{TW} | 0.6 | | | | | | | | ECUV1H392□ _{JW} | 0.6 |
| 4700 | | ECUV1H472□ _{CW} | 0.6 | ECUV1H472□ _{TW} | 0.6 | | | | | | | | ECUV1H472□ _{JW} | 0.6 | |
| 5600 | | ECUV1H562□ _{CW} | 0.85 | ECUV1H562□ _{TW} | 0.6 | | | | | | | | ECUV1H562□ _{JW} | 0.6 | |
| 6800 | | ECUV1H682□ _{CW} | 0.85 | | | | | | | | | | | | |
| 8200 | | ECUV1H822□ _{CW} | 1.15 | | | | | | | | | | | | |
| 10000 | | ECUV1H103□ _{CW} | 1.15 | | | | | | | | | | | | |

(Cap. Tol. Code)**

* Packaging Style Code: "V", "Y" for Taped Version (Taping pitch: 4 mm) and "X" for Bulk Type.
 ** □ : Capacitance Tolerance Codes.
 ***: Capacitance values of "E24" series and capacitance tolerance of ±5 % are available on special order.

■ Standard Products for "13" Type (EIA "1206" Type), Taped Version

| Capacitance (pF) | Capacitance Tolerance | B/X7R | | | | | | Capacitance Tolerance | F/Y5V | | | | | | | | |
|------------------|------------------------|--------------------|-------------|--------------|-------------|-------------|-------------|-----------------------|--------------|-------------|--------------|-------------|----------|-------------|--|--------------|-----|
| | | 25 VDC | | 16 VDC | | 10VDC | | | 25 VDC | | 16 VDC | | 10 VDC | | | | |
| | | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | Part No. | Dim. T (mm) | | | |
| 68000 | | | | | | | | | | | | | | | | | |
| 82000 | | | | | | | | | | | | | | | | | |
| 100000 | | ECJ3VB1E104 | 0.85 | ECJ3VB1C104 | 0.85 | | | | | | | | | | | | |
| 120000 | | ECJ3VB1E124K | 0.85 | ECJ3VB1C124K | 0.85 | | | | | | | | | | | | |
| 150000 | | ECJ3VB1E154 | 0.85 | ECJ3VB1C154 | 0.85 | | | | | | | | | | | | |
| 180000 | | ECJ3VB1E184K | 0.85 | ECJ3VB1C184K | 0.85 | | | | | | | | | | | | |
| 220000 | ±10 % (K) or ±20 % (M) | ECJ3VB1E224 | 0.85 | ECJ3VB1C224 | 0.85 | | | +80 % (Z) | | | | | | | | | |
| 270000 | | ECJ3VB1E274K | 0.85 | ECJ3VB1C274K | 0.85 | | | | | | | | | | | | |
| 330000 | | ECJ3VB1E334 | 0.85 | ECJ3VB1C334 | 0.85 | | | | | | | | | | | | |
| 390000 | | ECJ3YB1E394K | 1.15 | ECJ3VB1C394K | 0.85 | | | | | | | | | | | | |
| 470000 | | ECJ3YB1E474 | 1.15 | ECJ3VB1C474 | 0.85 | | | | ECJ3VF1E474Z | 0.85 | | | | | | | |
| 560000 | | | | ECJ3VB1C564K | 0.85 | | | | | | | | | | | | |
| 680000 | | ECJ3YB1E684 | 1.6 | ECJ3VB1C684 | 0.85 | | | | ECJ3YF1E684Z | 1.15 | ECJ3VF1C684Z | 0.85 | | | | | |
| 820000 | | | | ECJ3YB1C824K | 1.15 | | | | | | | | | | | | |
| 1000000 | | ECJ3YB1E105 | 1.6 | ECJ3YB1C105 | 1.15 | | | | ECJ3YF1E105Z | 1.15 | ECJ3VF1C105Z | 0.85 | | | | | |
| 1500000 | | (Cap. Tol. Code)** | | | | ECJ3YB1A155 | 1.6 | | ECJ3YF1E155Z | 1.15 | ECJ3VF1C155Z | 0.85 | | | | | |
| 2200000 | | | | | | ECJ3YB1A225 | 1.6 | | ECJ3YF1E225Z | 1.15 | ECJ3VF1C225Z | 0.85 | | | | | |
| 3300000 | | | | | | ECJ3YB1A335 | 1.6 | | | | ECJ3YF1C335Z | 1.15 | | | | | |
| 4700000 | | | | | | | | | | | ECJ3YF1C475Z | 1.15 | | | | | |
| 6800000 | | | | | | | | | | | | | | | | | |
| 10000000 | | | | | | | | | | | | | | | | ECJ3YF1A106Z | 1.6 |

*Packaging Style Code: "V", "Y" for Taped Version (Taping pitch: 4 mm) and "X" for Bulk Type.
 **□: Capacitance Tolerance Codes.

■ Packaging Specifications


● Standard Packing Quantity

| Size Code (EIA) | Thickness | Paper taping | Embossed taping | Bulk | Bulk case |
|-----------------|-----------|-------------------------------------|------------------------------------|---------------|-----------------|
| 10 (0402) | 0.5 mm | Pitch 2 mm: 10000 (50000) pcs./reel | — | 1000 pcs./bag | 50000 pcs./case |
| 11 (0603) | 0.8 mm | Pitch 2 mm: 8000 (20000) pcs./reel | — | 1000 pcs./bag | 15000 pcs./case |
| | | Pitch 4 mm: 4000 (10000) pcs./reel | | | |
| 12 (0805) | 0.6 mm | Pitch 2 mm: 10000 (40000) pcs./reel | — | 1000 pcs./bag | 10000 pcs./case |
| | 0.85 mm | Pitch 4 mm: 5000 (20000) pcs./reel | | | |
| | | Pitch 4 mm: 4000 (10000) pcs./reel | | | |
| 13 (1206) | 1.25 mm | — | Pitch 4 mm: 2000 (10000) pcs./reel | 1000 pcs./bag | — |
| | 0.6 mm | Pitch 4 mm: 5000 (20000) pcs./reel | | | |
| | 0.85 mm | Pitch 4 mm: 4000 (10000) pcs./reel | | | |
| | 1.15 mm | — | | | |
| | 1.6 mm | — | Pitch 4 mm: 2000 pcs./reel | 1000 pcs./bag | — |
| | | | | | |

() for large size reel applied


● Paper Taping

P₁: 2mm

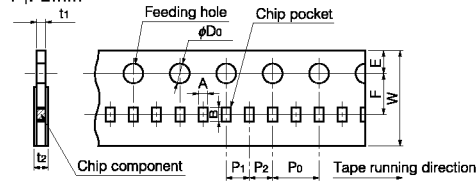


| Symbol | A | B | W | F | E | P ₁ | P ₂ | P ₀ | φD ₀ | t ₁ | t ₂ |
|-----------|------------|------------|----------|------------|------------|----------------|----------------|----------------|-----------------|----------------|----------------|
| 10 (0402) | 0.65 ±0.05 | 1.15 ±0.05 | | | | | | | | 0.7 max. | 1.0 max. |
| 11 (0603) | 1.10 ±0.10 | 1.90 ±0.10 | 8.0 ±0.2 | 3.50 ±0.05 | 1.75 ±0.10 | 2.00 ±0.05 | 2.00 ±0.05 | 4.0 ±0.1 | 1.5 ±0.1 | 1.1 max. | 1.4 max. |
| 12 (0805) | 1.65 ±0.20 | 2.4 ±0.2 | | | | | | | | | |

P₁: 4mm

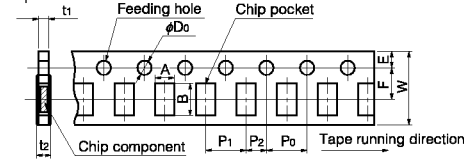


| Symbol | A | B | W | F | E | P ₁ | P ₂ | P ₀ | φD ₀ | t ₁ | t ₂ |
|-----------|------------|------------|----------|------------|------------|----------------|----------------|----------------|-----------------|----------------|----------------|
| 11 (0603) | 1.10 ±0.10 | 1.90 ±0.10 | | | | | | | | | |
| 12 (0805) | 1.65 ±0.20 | 2.4 ±0.2 | 8.0 ±0.2 | 3.50 ±0.05 | 1.75 ±0.10 | 4.0 ±0.1 | 2.00 ±0.05 | 4.0 ±0.1 | 1.5 ±0.1 | 1.1 max. | 1.4 max. |
| 13 (1206) | 2.0 ±0.2 | 3.6 ±0.2 | | | | | | | | | |

● Embossed Taping

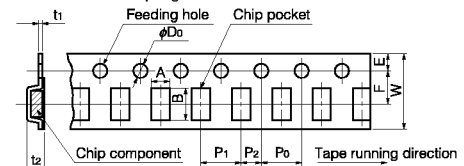

| Symbol | A | B | W | F | E | P ₁ | P ₂ | P ₀ | φD ₀ | t ₁ | t ₂ |
|-----------|------------|-----------|----------|------------|------------|----------------|----------------|----------------|-----------------|----------------|----------------|
| 12 (0805) | 1.55 ±0.20 | 2.35 ±0.2 | 8.0 ±0.2 | 3.50 ±0.05 | 1.75 ±0.10 | 4.0 ±0.1 | 2.00 ±0.05 | 4.0 ±0.1 | 1.5 ±0.1 | 0.6 max. | 2.1 max. |
| 13 (1206) | 1.95 ±0.20 | 3.6 ±0.2 | | | | | | | | | |

● Reel for Taping




| Symbol | A | B | C | D | E | W | W ₁ |
|-----------|---------------------------|----------------------|-----------|---------------------|----------|---------------------|---------------------|
| Dim. (mm) | φ180 ± _(390±5) | φ60.0 ±0.5 (50 min.) | 13.0 ±0.5 | 21.0 ±0.8 (20 min.) | 2.0 ±0.5 | 9.0 ±0.3 (8.5 ±1.0) | 1.3 ±0.2 (2.0 ±0.5) |


() : Large size reel

● Leader Part and Taped End

Tape end




Leader part



Unit : mm








(1) Bulk Case





Unit: mm

■ Typical Temperature Characteristics

[Class 1 (T.C. Type)]

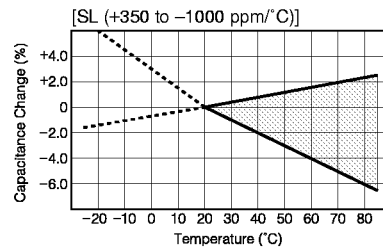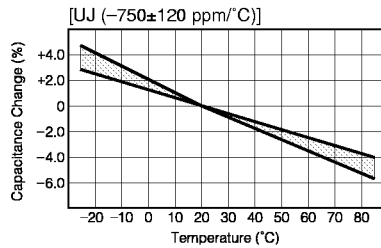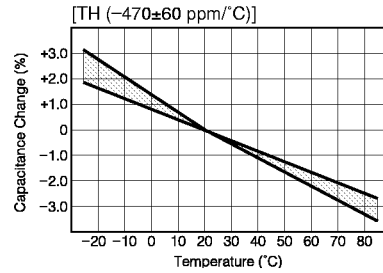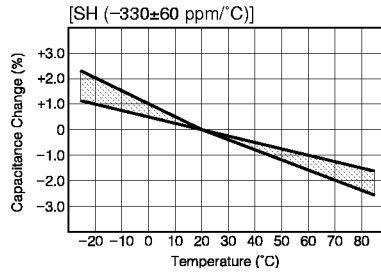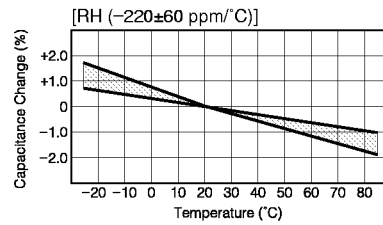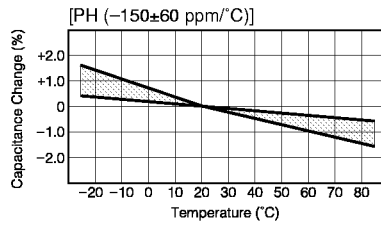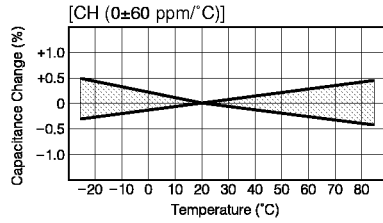

[Class 2 (Hi-K Type)]

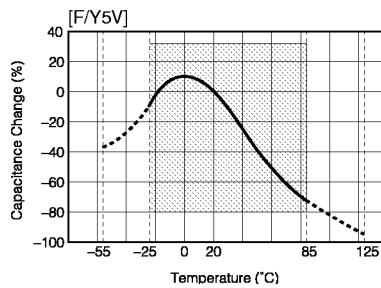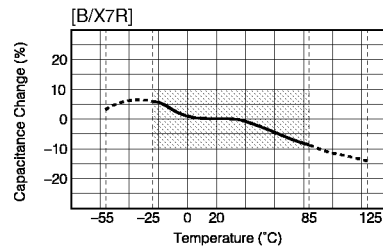

Multilayer Ceramic Chip Capacitors

Series: **ECU, ECJ** (For General Electronic Equipment)

Handling Precautions

⚠ Safety Precautions

The Multilayer Ceramic Chip Capacitors (hereafter referred to as "The Capacitors") may fail in a short circuit mode or in an open-circuit mode, when subjected to severe conditions of electrical, environmental and/or mechanical stresses beyond the specified "Ratings" and specified "Conditions" in the Catalog and the Specifications, resulting in burnout, flaming or glowing in the worst case.

Following "⚠ Precautions for Safety" and "Application Notes" shall be taken in your major consideration. If you have a question about the Precautions for Handling, please contact our engineering section or factory.

1. ⚠ Operating Conditions and Circuit Design**1.1 Operating Temperature Range**

The specified "Operating Temperature Range" in the catalog is absolute maximum and minimum temperature rating. So in any case, the Capacitors shall be operated within the specified "Operating Temperature Range".

1.2 Designs of Voltage Applications

The Capacitors shall not be operated exceeding the specified "Rated Voltage" in the catalog. If voltage ratings are exceeded, the result could be failure or damage. In case of application of DC and AC voltages to the capacitors, the designed peak voltage shall be within the specified "Rated Voltage".

In case of AC of pulse voltage, the peak voltage (peak to peak) shall be within the specified "Rated Voltage". If high frequency voltage or fast rising pulse voltage is applied continuously even within the "Rated Voltage", contact our engineering section before use.

1.3 Charging and Discharging Current

The Capacitors shall not be operated beyond the specified "Maximum Charging/Discharging Current Ratings" in the specifications. Applications to a low impedance circuit such as a "secondary power circuit" are not recommended for safety.

1.4 Temperature Rise by Dielectric Loss of the Capacitor

The "Operating Temperature Range" mentioned above shall include a maximum surface temperature rise of 20 °C, which is caused by the Dielectric Loss of the Capacitor and applied electrical stresses (such as voltage, frequency and wave form etc.)

It is recommended to measure and check "Surface Temperature of the Capacitor" in your equipment at your estimated/designed maximum ambient temperature.

1.5 Restriction on Environmental Conditions

The Capacitors shall not be operated and/or stored under following environmental conditions;

- a) To be exposed directly to water or salt water.
- b) To be exposed directly to sunlight.
- c) Under conditions of condensation
- d) Under conditions of corrosive atmosphere such as hydrogen sulfide, sulfuric acid, chlorine, or ammonia etc.
- e) Under severe conditions of vibration or shock beyond the specified conditions in the Specifications.

1.6 Secular Changes in Capacitance

(1) Peculiar characteristics of "Secular Changes in Capacitance" are observed in the Capacitors (Class 2 High Dielectric Constant, Temperature Characteristics "X7R" and "Y5V"). The "secular changes" shall be considered in your circuit design.

(2) The Capacitance changes, due to the individual characteristics of ceramic dielectric materials applied, can be recovered to the each initial values at shipping by a heat treatment (140 to 150 °C for 1 hour).

(The recovered capacitance of Class 2 Capacitor shall be measured at the standard test condition after recovery times of 48 hours.)

2. ⚠ Design of Printed Circuit Board**2.1 Selection of Printed Circuit Boards**


When the Capacitors are mounted and soldered on an "Aluminum Substrate", the substrate has influences on Capacitor's reliability against "Temperature Cycles" and "Heat shock" because of difference of thermal expansion coefficient between them. It shall be carefully confirmed that the actual board to be used does not deteriorate the characteristics of the Capacitors.

2.2 Design of Land Pattern

(1) Recommended Dimensions of Lands: As shown in Table 1 and Fig.1.

Notes: * Too large land requires excess amount of solder.
 ** The Dimensions shall be symmetrical

Fig.1 Recommended Land Dimensions



(Unit: mm)

Table 1 Recommended Land Dimensions in mm


| Size Code (EIA) | Components Dimensions | | | Land Dimensions for Flow Soldering | | | Land Dimensions for Reflow Soldering | | |
|-----------------|-----------------------|------|----------|------------------------------------|---------|---------|--------------------------------------|---------|---------|
| | L | W | T | a | b | c | a | b | c |
| 13 (1206) | 3.2 | 1.6 | 0.5-1.25 | 2.0-2.4 | 4.4-4.8 | 1.0-1.3 | 1.8-2.4 | 3.8-4.8 | 1.2-1.6 |
| 12 (0805) | 2.0 | 1.25 | 0.5-1.45 | 1.0-1.4 | 3.0-3.2 | 0.8-1.0 | 0.8-1.2 | 2.4-3.2 | 1.0-1.2 |
| 11 (0603) | 1.6 | 0.8 | 0.8 | 0.8-1.0 | 2.0-2.6 | 0.6-0.8 | 0.8-1.0 | 2.0-2.6 | 0.8-1.0 |
| 10 (0402) | 1.0 | 0.5 | 0.5 | — | — | — | 0.5-0.6 | 1.5-1.7 | 0.5-0.6 |

(2) Recommended amount of solder

Recommended amount of solder: As shown in Fig.2

Excess amount of solder gives large mechanical stresses to the Capacitors/components.


Fig.2 Recommended Amount of Solder

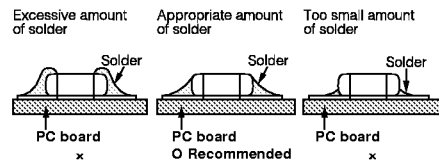

2.3 Component Layout

When placing/mounting the Capacitors/components near an area which is apt to bend or a grid groove on the PC board, it is advisable to have both electrodes subjected to uniform stresses, or to position the components electrodes at right angles to the grid groove or bending line.

Fig.3 Component Layout

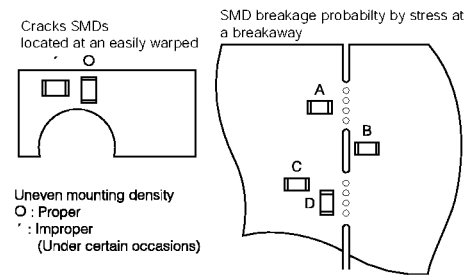

Probability at which the chip capacitor is broken by the stress on PC board break: A>C>B=D

2.4 Mounting Density and Spaces

Placements in too narrow spaces between components may cause "Solder Bridges", during soldering. The minimum space between components shall be 0.5 mm in view of the positioning tolerances of the mounting machines and the dimensional tolerances of the components and PC Boards.

2.5 Applications of Solder Resist

Applications of Solder Resist are effective to prevent solder bridges and to control amounts of solder on PC boards. (As shown in Table 2)

Table 2 Application Examples of Solder Resist

| | Recommended Application Examples | Examples of Solder Bridges |
|---|----------------------------------|----------------------------|
| Narrow Spacing between Chip Components | Solder Resist | Solder Bridge |
| Radial Components are directly connected to Chip Components | Solder Resist | Solder Bridge |
| Common lands (chassis, etc.) are close to Chip Components. | Solder Resist | Solder Bridge |

3. Precautions for Assembly

3.1 Adhesives for Mounting

(1) Selection of adhesives

- The viscosity of an adhesive for mountings shall be such that the adhesive does not flow off on the land during it's curing.
- If the adhesive is too low in its viscosity, mounted components may be out of alignment after or during soldering.
- The adhesives shall not be corrosive or chemically active to the mounted components and the PC boards.

- The amount of adhesive shall be such that the adhesive does not flow off or be out of alignment.
- (2) Curing Conditions
 - Adhesives for mountings can be cured by ultraviolet or infrared radiation. In order to prevent the terminal electrodes of the Capacitors from oxidizing. The curing shall be done at conditions of 160 °C max., for 2 minutes max.


3.2 Chip Mounting Consideration

In mounting the Capacitors/components on a printed circuit board,/any bending and expanding force against them shall be kept minimum to prevent them from being damaged or cracked.

Following precautions and recommendations shall be observed carefully in the process;


- (1) Maximum stroke of the vacuum nozzle shall be adjusted so that the pushing force to the printed circuit board shall be limited to a static load of 1 to 3 N (100 to 300 gf). (See Fig.4)
- (2) Maximum stroke of the nozzle shall be adjusted so that the maximum bending of printed circuit board does not exceed 0.5 mm. (See Fig.4)

Fig.4



- (3) The printed circuit board shall be supported by means of adequate supporting pins as shown in Fig.5-(b).

Fig.5

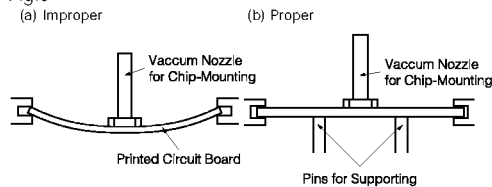

3.3 Soldering Flux and Solder

- (1) Soldering Flux:
 - The content of halogen in the soldering flux shall be 0.2 wt% or less.
 - Rosin-based and non-activated soldering flux is recommended.
- (2) Water soluble type Soldering Flux:

In case of water soluble type soldering flux being applied, the flux residue on the surface of P.C. boards may have influence on the reliability of the components and cause deterioration and failures of them.
- (3) Solder:


An eutectic solder (Sn63: Pb37) is recommended.

3.4 Soldering

3.4.1 Flow Soldering

In flow soldering process, abnormal and large thermal and mechanical stresses, caused by "Temperature Gradient" between the mounted Capacitors and melted solder in a soldering bath, may be applied directly to the Capacitors, resulting in failure and damage of the capacitors. So it is essential that the soldering process shall be controlled to the following recommended conditions and precautions. (See Fig. 6)

Fig.6 Recommended Soldering Temperature-Time Profile (Flow soldering)

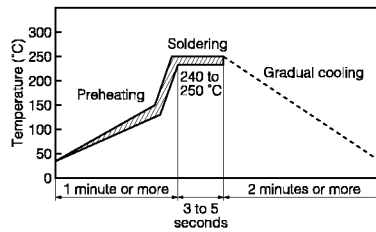

- (1) Application of Flux:

The soldering flux (3.3) shall be applied to the mounted Capacitors thinly and uniformly by forming method.
- (2) Preheating:

The mounted Capacitors/Components shall be preheated sufficiently so that the "Temperature Gradient" between the Capacitors/components and the melted solder shall be 150 °C or below.
- (3) Immersion to Soldering Bath:

The Capacitors shall be immersed into a soldering bath of 240 to 250 °C for 3 to 5 seconds.
- (4) Cooling:


The Capacitors shall be cooled gradually to room ambient temperature with the cooling temperature rates of 8 °C/s max. from 250 °C to 170 °C, and 4 °C/s max. from 170 °C to 130 °C.
- (5) Flux Cleaning:

When the Capacitors are immersed into cleaning solvent, it shall be confirmed that the surface temperatures of devices do not exceed 100 °C. (See 3.5)

3.4.2 Reflow Soldering

In reflow soldering process, the mounted Capacitors/components are generally heated and soldered by a thermal conduction system such as an "Infrared radiation and hot blast soldering system" or a "Vapor Phase Soldering System (VPS)". Large temperature gradients such as a rapid heating and cooling in the process may cause electrical failure and mechanical damage of the devices. It is essential that the soldering process shall be controlled by the following recommended conditions and precautions. (See Fig.7)

Fig.7 Recommended Soldering Temperature-Time Profile (Reflow soldering)

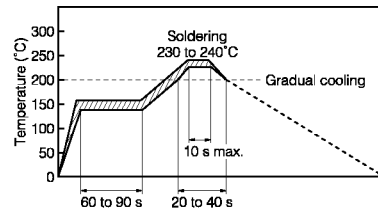

- (1) Preheating 1:
The mounted Capacitors/components shall be preheated sufficiently, for 60 to 90 seconds so that the surface temperatures of them to be 140 to 160 °C.
- (2) Preheating 2:
After "Preheating 1", the mounted Capacitors/components shall be heated to the elevated temperatures of 150 to 200 °C for 2 to 5 seconds.
- (3) Soldering:
The mounted Capacitors/components shall be heated under the specified heating conditions (200 to 240 to 200 °C for total of 20 to 40 seconds, See Fig.7) and shall be soldered at the maximum temperature of 240 °C for 10 seconds or less.
- (4) Cooling:
After soldering, the mounted Capacitors/components shall be gradually cooled to room ambient temperature for preventing mechanical damages such as cracking of the devices.
- (5) Flux Cleaning:
When the mounted Capacitors/components are immersed into cleaning solvent, it shall be confirmed the surface temperatures of them does not exceed 100 °C. (See, 3.5 **⚠**Post Soldering Cleaning)

Note: If the mounted Capacitors/components are partially heated in the soldering process, the devices may be separated from the printed circuit board by the surface tension of partially melted solder, and stand up like a "Tomb Stone".

3.4.3 Hand Soldering

In hand soldering of the Capacitors, large temperature gradient between preheated the Capacitors and the tip of soldering iron may cause electrical failures and mechanical damages such as cracking or breaking of the devices. The soldering shall be carefully controlled and carried out so that the temperature gradient is kept minimum with following recommended conditions for hand soldering.

[Recommended Soldering Conditions]

- (1) Solder:
ø1 mm Thread eutectic solder (Sn63: Pb37) with soldering flux* in the core.
* Rosin-based, and non-activated flux is recommended.
- (2) Preheating:
The capacitors shall be preheated so that "Temperature Gradient" between the devices and the tip of soldering iron is 150 °C or below.
- (3) Soldering Iron:
Rated Power of 20 W max. with 3 mm soldering tip in diameter.
- (4) Temperature of soldering iron tip: 300 °C max.
(The required amount of solder shall be melted in advance on the soldering tip.)
- (5) Cooling:
After soldering, The Capacitors shall be cooled gradually at room ambient temperature.

3.5 **⚠** Post Soldering Cleaning

- (1) Residues of corrosive soldering fluxes on the PC board after cleaning may have great influence on the electrical characteristics and the reliability (such as humidity resistance) of the Capacitors which have been mounted on the board, it shall be confirmed that the characteristics and the reliability of the devices are not affected by the applied cleaning conditions.
- (2) Solubility of alternative cleaning solvent such as alcohol etc, is inferior to that of freon cleaning solvent in flux cleaning.
So in the case of alternative cleaning solvents applied, fresh cleaning solvent shall always be used, and sufficient rinsing and drying shall be carried out.
- (3) When an ultrasonic cleaning is applied to the mounted Capacitors on PC boards, following conditions are recommended for preventing failure or damage of the devices due to the large vibration energy and the resonance caused by the ultrasonic waves :
Frequency : 29 kHz max.
Radiated Power : 20 W/liter max.
Period : 5 minutes max.

3.6 Process Inspection

When the mounted printed circuits are inspected with measuring terminal pins, abnormal and excess mechanical stresses shall not be applied to the PC board and mounted components, to prevent failure or damage of the devices.

- (1) The mounted PC boards shall be supported by some adequate supporting pins to prevent their bending.
- (2) It shall be confirmed that the measuring pins have the right shaped tip, are equal in height and are set in the right positions.

3.7 Protective Coating

When the surface of a printed board on which the Capacitors has been mounted is coated with resin to protect against moisture and dust, it shall be confirmed that the protective coat does not influence the reliability of the capacitors in the actual equipment.

- (1) Coating materials, such as being corrosive and chemically active, shall not be applied to the Capacitors and other components.
- (2) Coating materials with a large expansivity shall not be applied to the Capacitors for preventing failures or damages (such as cracking) of the devices in the curing process.

3.8 Δ Dividing/Breaking of PC Boards

- (1) Abnormal and excessive mechanical stresses, such as bending or expanding force, on the components on the printed circuit board, shall be kept minimum in dividing/breaking.
- (2) Dividing/Breaking of the PC boards shall be done carefully at moderate speed by using a jig or apparatus to protect the Capacitors on the boards from mechanical damages.

3.9 Long Term Storage

The Capacitors shall not be stored under severe conditions of high temperatures and high humidities. Store them indoors under 40 °C max. and 75 % RH max.. Use them within 6 months and check the solderability before use. (See 1.5)