






ABSOLUTE MAXIMUM RATINGS (m 2 , w)				
PARAMETER	TEST CONDITION	SYMBOL	VALUE	UNIT
m			20	
m				
w w	m ≤		100	mW
m			100	
m		m	- 0 + 100	
m			- 0 + 100	
m	w		2 0	
m / m	- - -0		2	/W

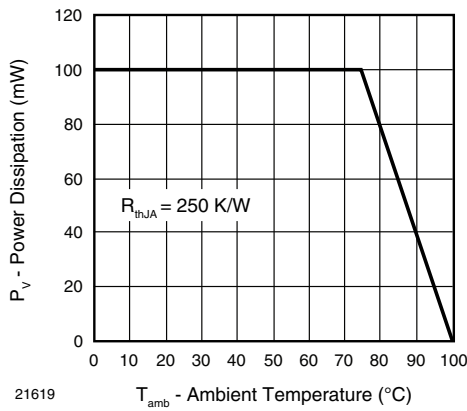


. 1 - w m . m m


BASIC CHARACTERISTICS (m 2 , w)							
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT	
m κ w	0.1 m		20				
κ	, 0			1	100		
m	0 , 1 , 0			2			
	1 mW/ m ² , λ		1.0	2.	.1	m	
W κ		φ		0			
w		λ		0		m	
		λ ₀		0	0		001 000 w



BASIC CHARACTERISTICS (m 2 , w)

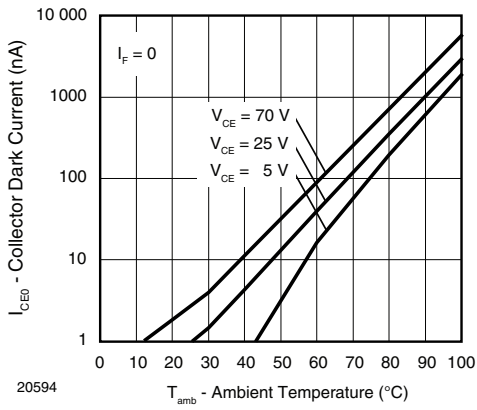


20594

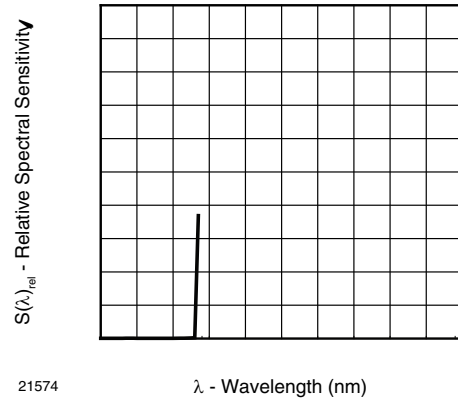

21574


. 2 - . m m

. W .

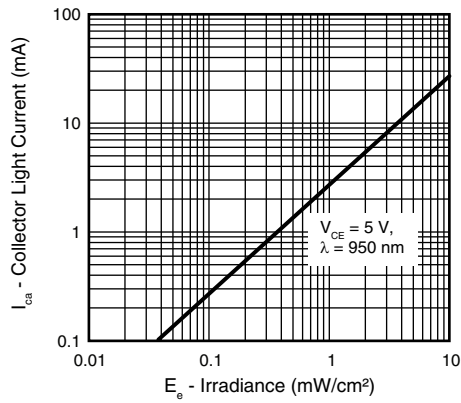

☒

m

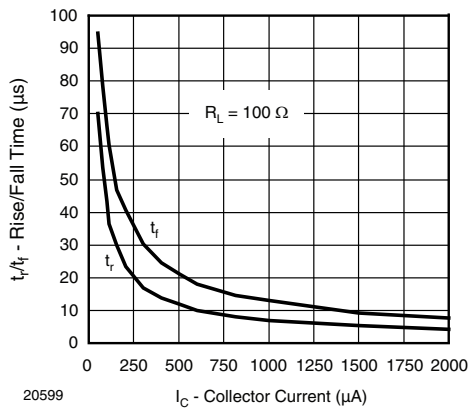

20599

. - / m .

. -

. m m





www.vishay.com

VEMT2003X01, VEMT2023X01

m

TAPE AND REEL DIMENSIONS VEMT2023X01 m m

Issue: prel; 03.0

. 1.0, 0 - -10

W

7

www.vishay.com

m m

1 2

www.vishay.com/1000

