


STO-4833

NOTES:

- ELECTRICAL SPECIFICATIONS:
 CENTER FREQUENCY = 1580±2 MHz
 BANDWIDTH: 5.0 MHz MIN. @ -10dB
 BORE SIGHT AXIAL RATIO: 3.0 dB MAX. @ 1580±2 MHz
 GAIN: 0 dBic MIN.
 RETURN LOSS: 15 dB MIN.
 RIGHT HAND CIRCULAR POLARIZATION
- SPECIFICATIONS ARE FOR UNPACKAGED ANTENNA.
- FOOTPRINT AND ELECTRICAL SPECIFICATIONS ARE SUBJECT TO CHANGE.
 CONSULT SPECTRUM FSY MICROWAVE FOR SPECIFIC APPLICATIONS.
- TESTING TO BE PERFORMED ON AN ALUMINUM GROUND PLANE,
 1.181 [30MM] X 1.181 [30MM] INCHES, IN FREE SPACE.
- DIMENSIONS IN BRACKETS IN MILLIMETERS.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
0	INITIAL RELEASE PER CN 99991	6/21/01	R.MILLER
1	REDRAWN PER ECN04354, MY, 5/5/04	5/12/04	MI

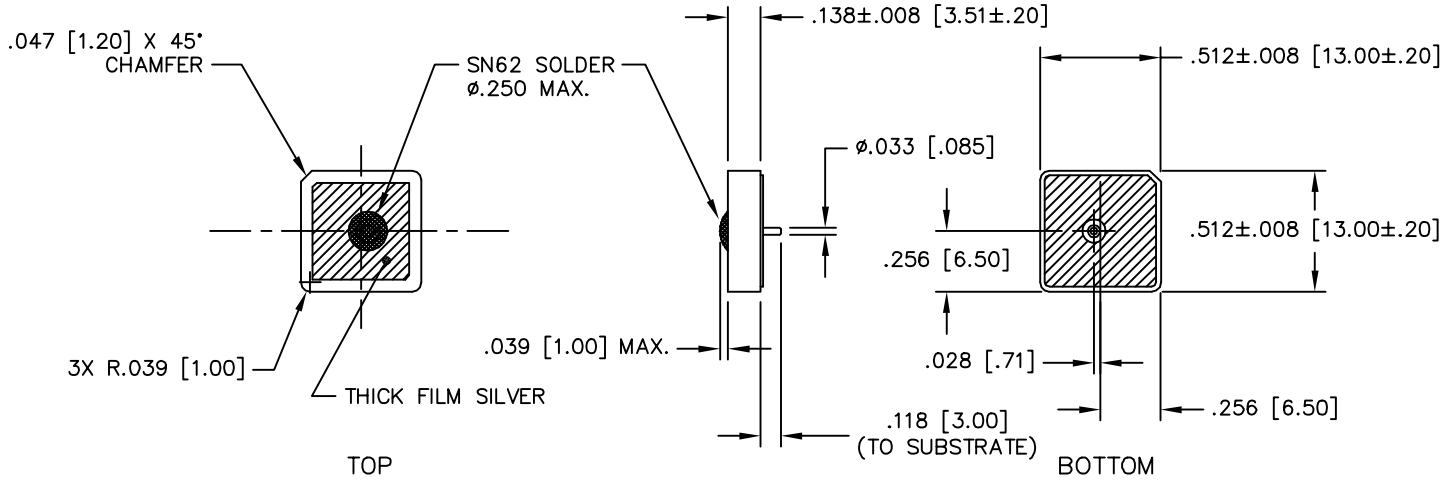

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES DIMENSIONS APPLY AFTER PLATING INTERPRET DIM. AND TOL. PER ASME Y14.5M - 1994 TOLERANCES: .XX±.02 .XXX±.005 <±.50° BREAK ALL SHARP EDGES AND DEBURR		Spectrum FSY Microwave, Inc. COLUMBIA, MARYLAND USA		
DRAWN M. YAKER 5/6/04 CHECKED		SALES DRAWING, PA13-1580-005SA		
ENG. MARK INGALLS 5/6/04 MAN. - - Q.C. - -				
APPROVED MARK INGALLS 5/12/04		SIZE B CAGE CODE 67195	DRAWING NO. STO-4833	REV 1
		SCALE 2/1	DO NOT SCALE PRINTS	SHEET 1 OF 1

All technical information and the design disclosure in this drawing or in any accompanying technical data was originated by and is the property of Spectrum FSY Microwave, Inc. All patent, proprietary, design, manufacturing, reproduction, use and sales rights in any information disclosed herein are reserved by Spectrum FSY Microwave, Inc. No right or license to use any such information for any purpose other than as agreed to by Spectrum FSY Microwave, Inc. is prohibited without written permission of Spectrum FSY Microwave, Inc.