


853-016

Size #12 Differential Twinax Pin Contact
For Use with Mighty Mouse and Series 79 Micro-Crimp



Shielded
Contacts


Size #12 Differential Twinax Pin Contact for Multi-Gigabit Data Rate Applications



These solder terminated #12 twinax pin contacts accept 100 ohm twinax cable. Current rating is 1 Amp. DWV rating is 500 Vac rms sea level, 125 Vac at 70,000 feet. Contacts are packaged individually and shipped unassembled with instruction sheet. One contact consists of outer contact and center contact. All contacts are gold-plated copper alloy. 5000 megohm insulation resistance at 200Vdc. Mates with: 853-015. Ideally suited for multi-gigabit data rate applications such as 1000 Base-T gigabit ethernet.

Type	Glenair Part No.	Military Part No.	AWG Wire Size	Cable Accommodation	Impedence	Frequency Range	VSWR	Insertion Loss
Pin	853-016-01	N/A	30	963-102-30	100-Ohms Nominal	DC to 10 GHz	1.1 + (.03 * F GHz)	1/3 *F GHz

B

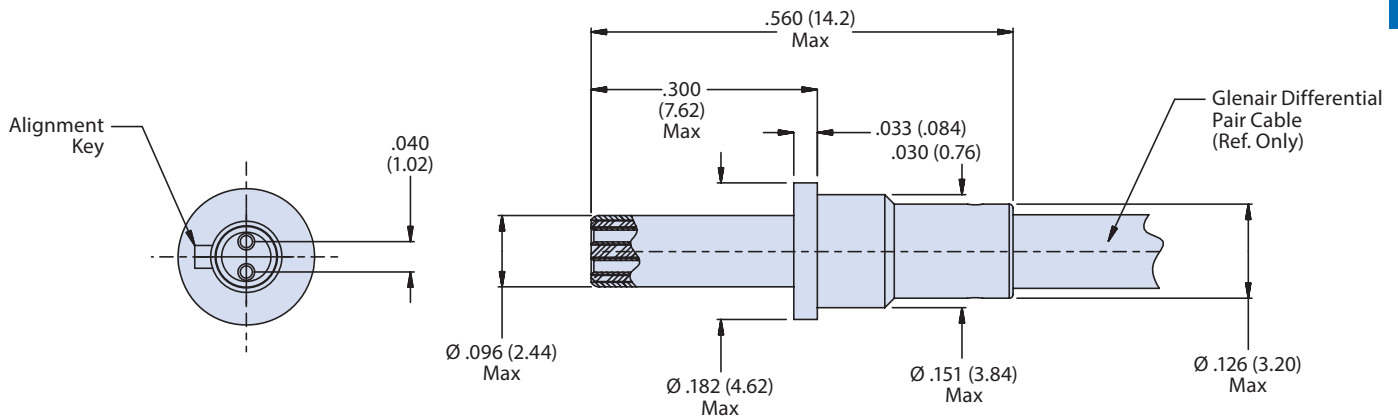

Material and Finish

Contact Body: Copper Alloy/Gold Plated
 Center Contact: Copper Alloy/Gold Plated

Electrical Parameters

Differential Impedence: 100-ohms nominal
 Frequency Range: DC to 10 Ghz
 VSWR: 1.1+(.03* F Ghz)
 Insertion Loss: 1/3* F Ghz
 Dielectric Withstanding Voltage: 500 Vrms
 Insulation Resistance: 5000 Megohms minimum

Notes

Contact is designed to accommodate Glenair P/N 963-102-30 cable.
 For assembly instructions, see A185014.
 Pin contact shall mate with Glenair Socket Contact P/N 853-015-XX.
 For use in Glenair Mighty Mouse and Series 79 Micro-Crimp connectors only.
 PCB Tail-equipped contacts also available. Consult factory.

Designed for use with 853-016-01
963-102-30
Differential Pair Cable

