


**BCX20**

■ **Features**

- General Purpose Transistors.

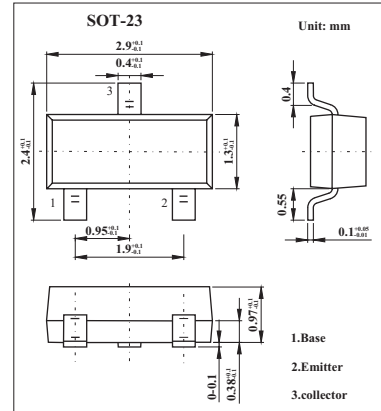

■ **Absolute Maximum Ratings** Ta = 25°C

Parameter	Symbol	Rating	Unit
Collector-emitter voltage	V <sub>CE</sub> S	30	V
Collector-emitter voltage	V <sub>CE</sub> O	25	V
Emitter-base voltage	V <sub>EB</sub> O	5	V
Collector current	I <sub>C</sub>	800	A
Collector dissipation	P <sub>C</sub>	310	W
Junction temperature	T <sub>j</sub>	150	°C
Storage temperature	T <sub>stg</sub>	-65 to +150	°C

■ **Electrical Characteristics** Ta = 25°C

Parameter	Symbol	Testconditons	Min	Max	Unit
Collector-emitter breakdown voltage	BV <sub>CE</sub> O	I <sub>C</sub> = 10mA, I <sub>B</sub> = 0	25		V
Collector-emitter breakdown voltage	BV <sub>CE</sub> S	I <sub>C</sub> = 100μA, V <sub>BE</sub> = 0	30		V
Emitter-base breakdown voltage	BV <sub>EB</sub> O	I <sub>E</sub> = 10μA, I <sub>C</sub> = 0	5		V
Collector cut-off current	I <sub>C</sub> B <sub>O</sub>	V <sub>CE</sub> = 20V, V <sub>BE</sub> = 0		100	nA
Emitter-base cut-off current	I <sub>E</sub> B <sub>O</sub>	V <sub>BE</sub> = 5V, I <sub>C</sub> = 0		10	nA
DC current gain	h <sub>FE</sub>	V <sub>CE</sub> = 1V, I <sub>C</sub> = 100mA	100	600	
		V <sub>CE</sub> = 1V, I <sub>C</sub> = 300mA	70		
		V <sub>CE</sub> = 1V, I <sub>C</sub> = 500mA	40		
Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> = 500mA, I <sub>B</sub> = 50mA		0.62	V
Base-emitter saturation voltage	V <sub>BE(on)</sub>	V <sub>CE</sub> = 1A, I <sub>B</sub> = 500mA		1.2	V

■ **Marking**

Marking	U2
---------	----