
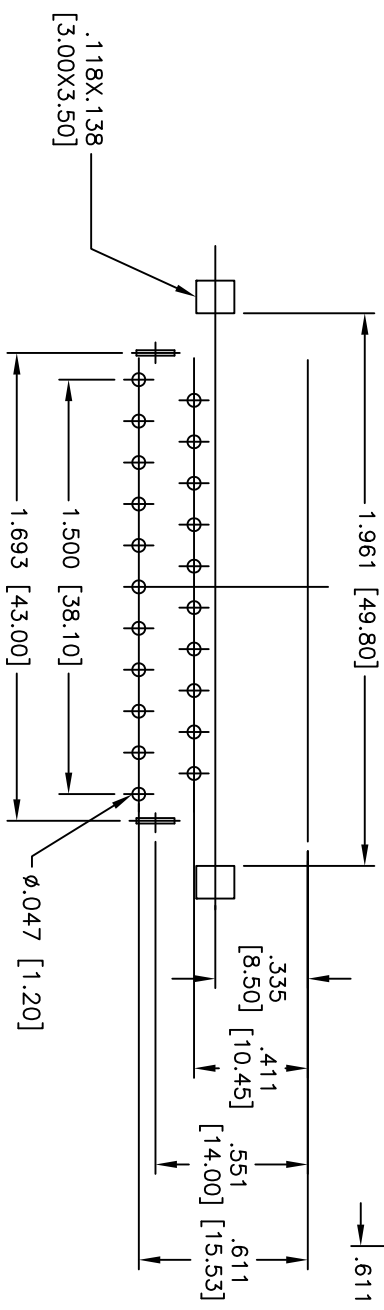
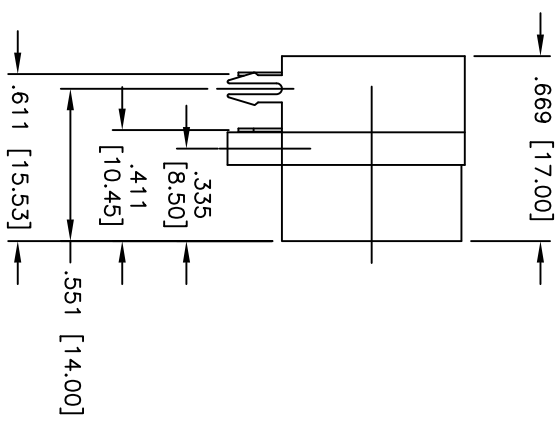


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/17/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

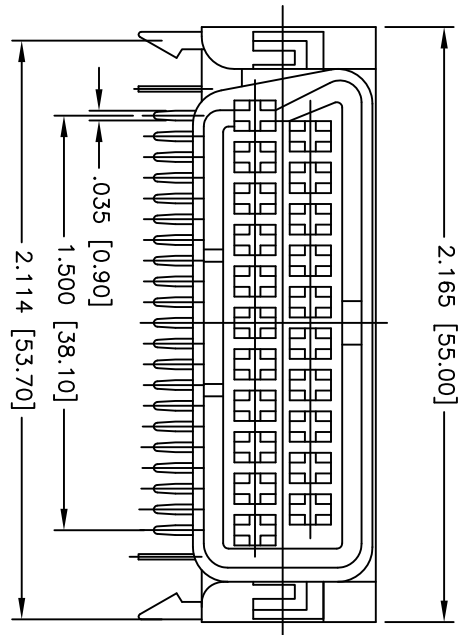

**SPECIFICATIONS:**

- Material: PC, rated UL 94V-2 & Glass fiber
- Insulator color: Black
- Contacts: Brass
- Plating: Tin over Copper underplate overall
- Electrical:
  - Operating voltage: 250 VAC max
  - Current rating: 3 Amps max
  - Contact resistance: 5,000 Mohms max
  - Insulation resistance: 5,000 Mohms min @ 100 VDC
  - Dielectric withstanding voltage: 350 VAC for 1 minute
- Environmental:
  - Lead free, RoHS Compliant
  - Recommended soldering temp: 235° for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	
DRAWN	DATE
AH	9/17/10
CHECKED	DATE
AH	9/17/10
APPROVED	DATE

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE		SIZE		PART NO.		REV.	
SCART CONNECTOR, 21 PIN, RIGHT ANGLE		X		SCT-SR-21-A-S1		-	
REF:	S00167T	SCALE:	NTS	SHEET:	1 OF 1		