

6

5

4

3



2

1



Rev	AWO #	Description	Date	Appr
-		RELEASED	9/3/10	

APPROVED: _____

DATE: _____ TITLE: _____

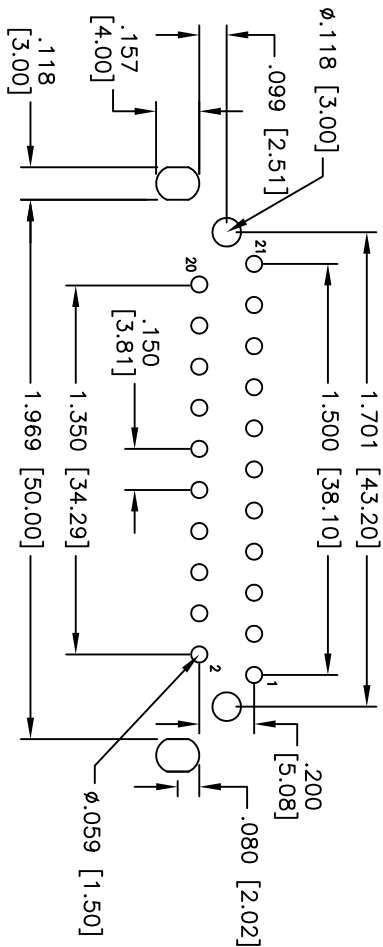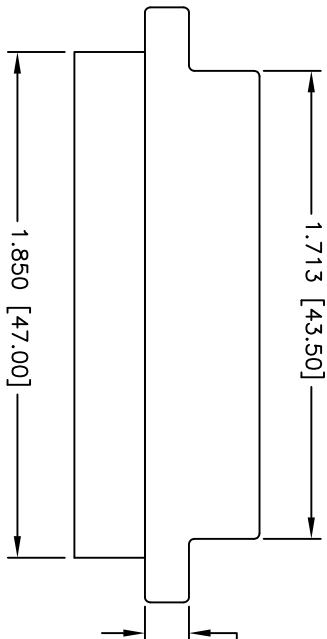

RECOMMENDED PCB LAYOUT

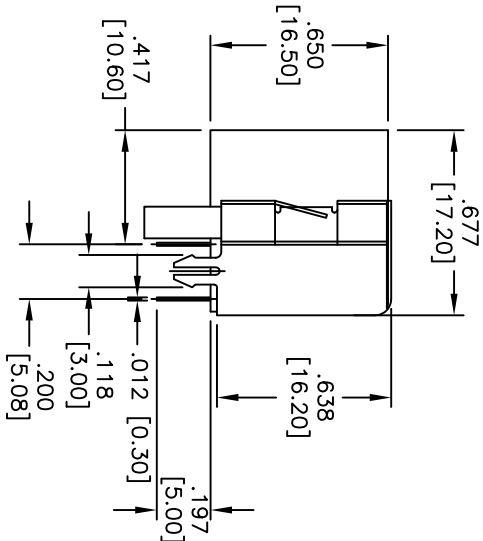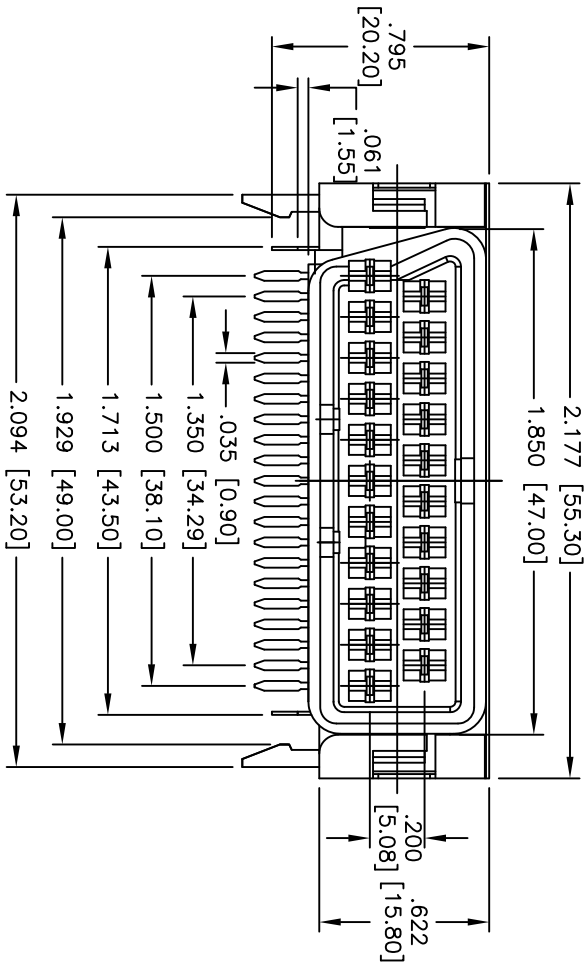

SPECIFICATIONS:

Material:

Insulator: PC, rated UL 94V-2 & Glass fiber

Insulator color: Black

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 3 Amps max

Contact resistance: 25 Mohms max

Insulation resistance: 5,000 Mohms min @ 100 VDC

Dielectric withstanding voltage: 350 VAC for 1 minute

Environmental:

Lead free, RoHS Compliant

Recommended soldering temp: 235° for 5 seconds

ADAM TECH

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

SCART CONNECTOR, 21 PIN, RIGHT ANGLE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				INCHES				Holes			
APPROVALS				DATE				DATE			
DRAWN	AY			9/3/10				9/3/10			
CHECKED	AH			9/3/10				9/3/10			
APPROVED											
TITLE				SIZE				PART NO.			
SCART CONNECTOR, 21 PIN, RIGHT ANGLE				X				SCT-SR-21-A-S			
REF: S00100T				SCALE: NTS				SHEET 1 OF 1			