
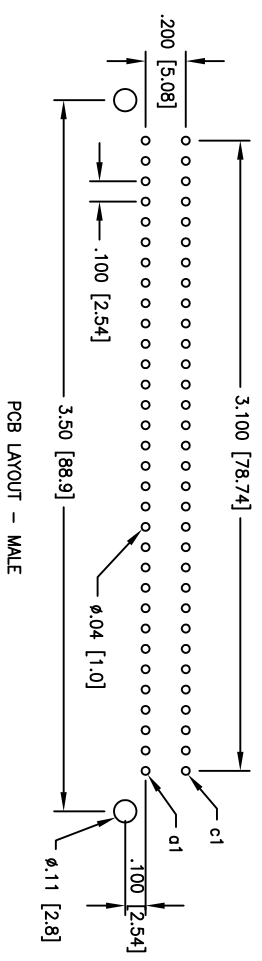


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/08/09	

APPROVED: _____ TITLE: _____
 DATE: _____

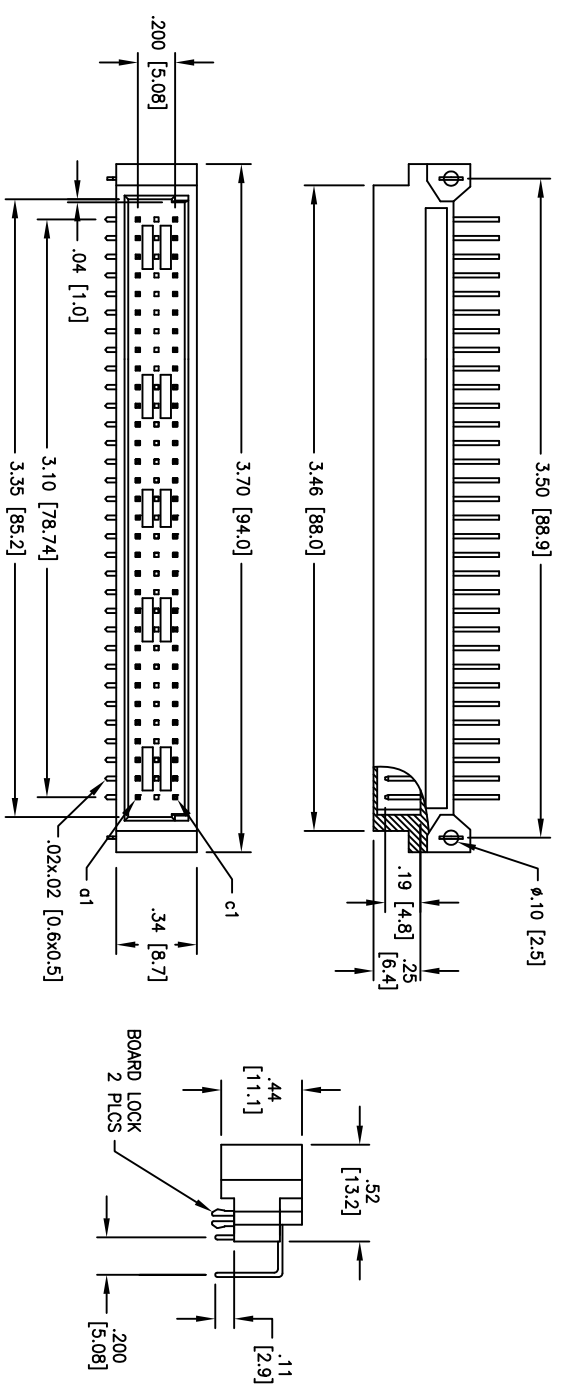

"X"	PLATING
1	30 u" Gold
2	15 u" Gold
3	Gold Flash

PCB LAYOUT - MALE

SPECIFICATIONS:

Material: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Beige
 Contacts: Brass

Plating: X Gold over Nickel on contact area, Tin over Copper underplate on tails
 (See chart for thickness)

Electrical:
 Current rating: 2 Amps max
 Contact resistance: 30 Mohms max @ 500 VDC
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -55°C to +105°C

Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED
 INCHES Holes
 .X ± .10 ØX ± .10
 .XX ± .020 ØXX ± .015
 .XXX ± .015 ØXXX ± .010

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710
 TITLE: DIN 41612, 96 POSITION MALE R/A, ROW
 A & C LOADED, 64 PINS, PCB MOUNT

APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	DIN-64MR-132-A1CX-BL	-