
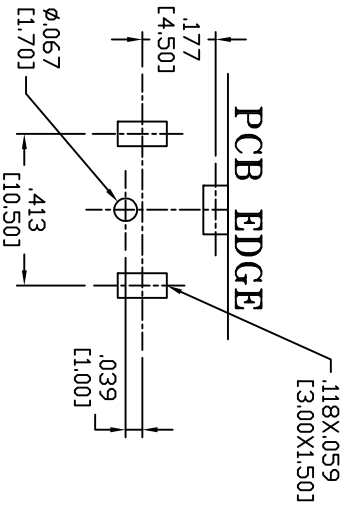


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/17/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

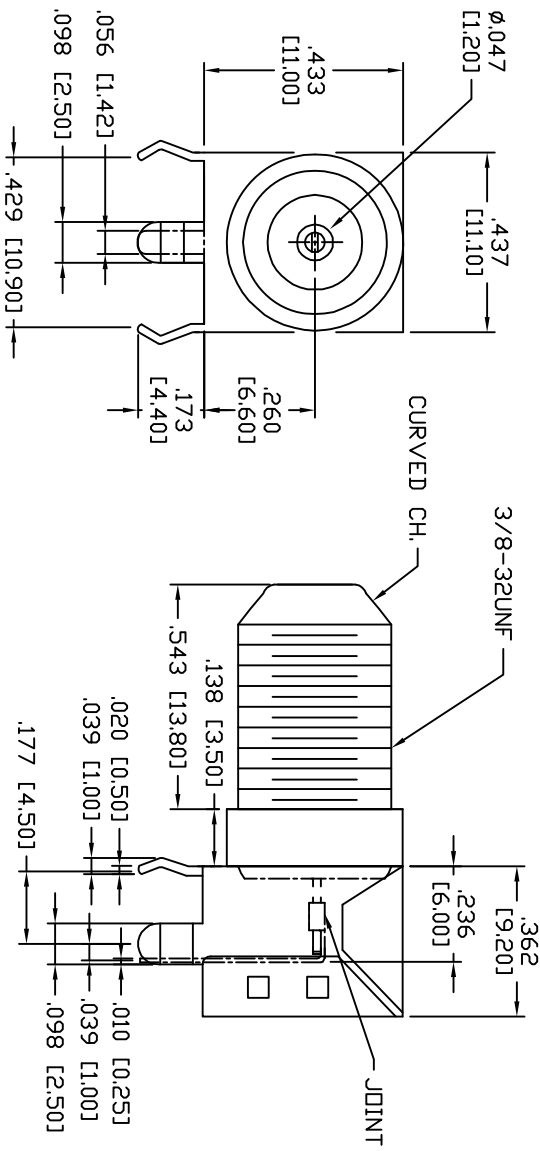

RECOMMENDED  
PCB LAYOUT

No.	DESCRIPTION	QTY	MATERIAL	FINISH
5	BODY	1	BRASS	NICKEL PLATED
4	TERMINAL	1	BRASS	TIN PLATED
3	CENTER PIN	1	PHOSPHOR BRONZE	TIN PLATED
2	BRACKET	1	C.R.S. 0.41mm	TIN PLATED
1	INSULATOR	1	PP	BLACK

**SPECIFICATIONS:**

**Electrical:**  
 Contact Resistance: AC 1000V 20 Amps max  
 Insulation resistance: 500 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 1200 VAC for 1 minute  
 Frequency range: 50MHz TO 850MHz

**Environmental:**  
 Lead free, RoHS compliant  
 Recommended soldering temp: 235°C for 5 seconds



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XXX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS

DATE	DATE
9/17/10	

**ADAM TECH**  
 909 Ratway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

F TYPE FEMALE, PCB, 75 OHM, R/A,  
 POLYPROPYLENE INSULATOR

APPROVED	CHECKED	DRAWN	SIZE	PART NO.	REV.
	AH	AY	X	RF4-70-P-00-75	-

DATE: 9/17/10

SCALE: NTS

SHEET 1 OF 1