





N-Channel Enhancement Mode MOSFET

Features

- 20V/12A, $R_{DS(ON)} = 35m\Omega$ (typ.) @ $V_{GS} = 10V$
 $R_{DS(ON)} = 45m\Omega$ (typ.) @ $V_{GS} = 4.5V$
 $R_{DS(ON)} = 110m\Omega$ (typ.) @ $V_{GS} = 2.5V$
- Super High Dense Cell Design
- High Power and Current Handling Capability
- TO-252, SOT-89 and SOT-223 Packages



Pin Description



Applications

- Switching Regulators
- Switching Converters

Ordering and Marking Information

APM 2054N  Lead Free Code Handling Code Temp Range Package Code	Package Code D : SOT-89 V : SOT-223 U : TO-252 Operation Junction Temp. Range C : -55 to 150 °C Handling Code o TR : Tape & Reel Lead Feed Code L : Lead Free Device Blank : Original Device
APM 2054N D/V : 	XXXXXXXX - Date Code
APM 2054N U : 	XXXXXXXX - Date Code

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter			Rating	Unit
V _{DSS}	Drain-Source Voltage			20	V
V _{GSS}	Gate-Source Voltage			±16	
I _D *	Maximum Drain Current – Continuous		TO-252	10	A
			SOT-223/SOT-89	4	
I _{DM}	Maximum Drain Current – Pulsed		TO-252	25	
			SOT-223/SOT-89	12	
P _D *	Maximum Power Dissipation	T _A =25°C	TO-252	5	W

ANPEC reserves the right to make changes to improve reliability or manufacturability without notice, and advise customers to obtain the latest version of relevant information to verify before placing orders.

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter			Rating	Unit
P _D *	Maximum Power Dissipation	T _A =25°C	SOT-223/SOT-89	1.25	W
		T _A =100°C	TO-252	2	
			SOT-223/SOT-89	0.5	
T _J	Maximum Junction Temperature			150	°C
T _{STG}	Storage Temperature Range			-55 to 150	°C

* Surface Mounted on FR4 Board, $t \leq 10$ sec.

Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Test Condition	APM2054N			Unit
			Min.	Typ.	Max.	
Static						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _{DS} =250μA	20			V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =16V, V _{GS} =0V			1	μA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _{DS} =250μA	0.7	0.9	1.5	V
I _{GSS}	Gate Leakage Current	V _{GS} =±16V, V _{DS} =0V			±100	nA
R _{DS(ON)}	Drain-Source On-state Resistance	V _{GS} =10V, I _{DS} =12A		35	40	mΩ
		V _{GS} =4.5V, I _{DS} =6A		45	54	
		V _{GS} =2.5V, I _{DS} =2A		110	130	
V _{SD}	Diode Forward Voltage	I _{SD} =6A, V _{GS} =0V		0.7	1.3	V
Dynamic						
Q _g	Total Gate Charge	V _{DS} =10V, V _{GS} =4.5V, I _{DS} =6A		11	13	nC
Q _{gs}	Gate-Source Charge			3.8		
Q _{gd}	Gate-Drain Charge			5.2		
t _{d(ON)}	Turn-on Delay Time	V _{DD} =10V, I _{DS} =1A, V _{GEN} =4.5V, R _G =6Ω		12	24	ns
t _r	Turn-on Rise Time			10	20	
t _{d(OFF)}	Turn-off Delay Time			40	74	
t _f	Turn-off Fall Time			20	38	
C _{iSS}	Input Capacitance	V _{GS} =0V		450		pF
C _{oSS}	Output Capacitance	V _{DS} =15V		100		
C _{rSS}	Reverse Transfer Capacitance	Frequency=1.0MHz		60		


Notes

^a : Pulse test ; pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$


^b : Guaranteed by design, not subject to production testing

Typical Characteristics


Output Characteristics

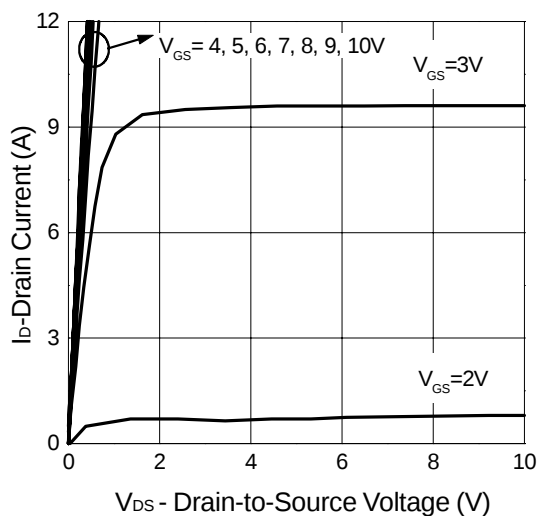


Transfer Characteristics

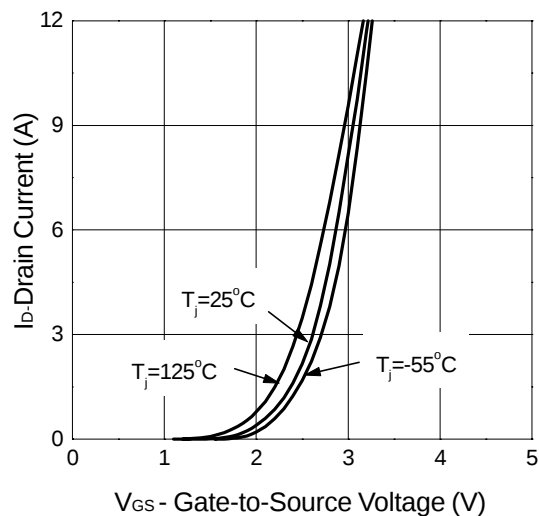

Threshold Voltage vs. Temperature

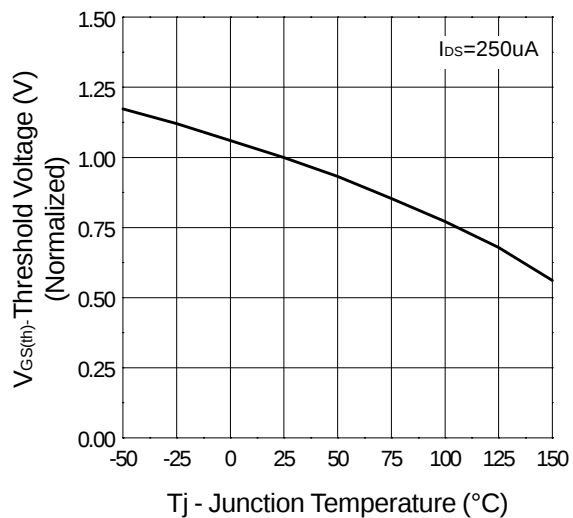


On-Resistance vs. Drain Current

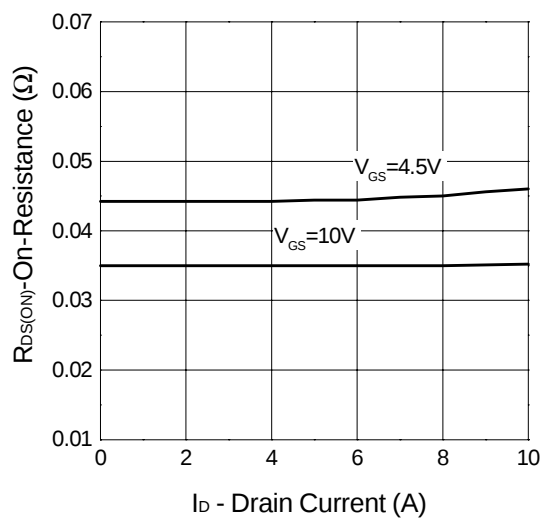


Typical Characteristics


On-Resistance vs. Gate-to-Source Voltage

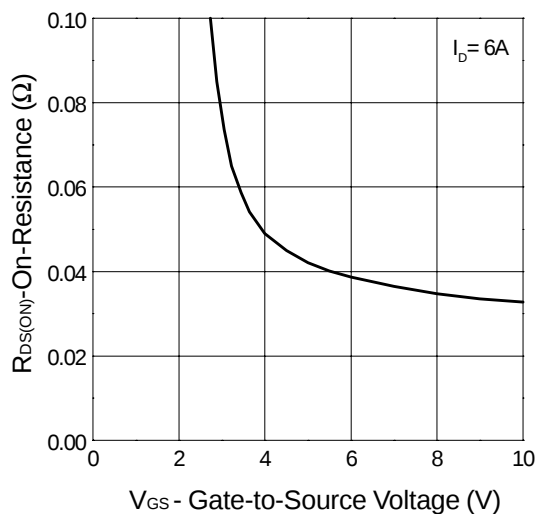


On-Resistance vs. Junction Temperature

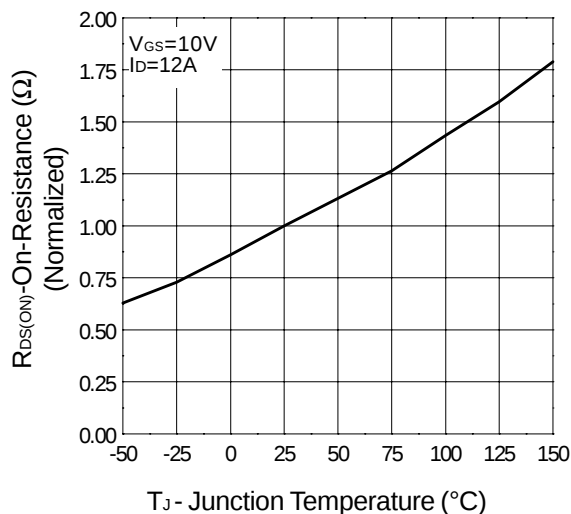





On-Resistance vs. Junction Temperature

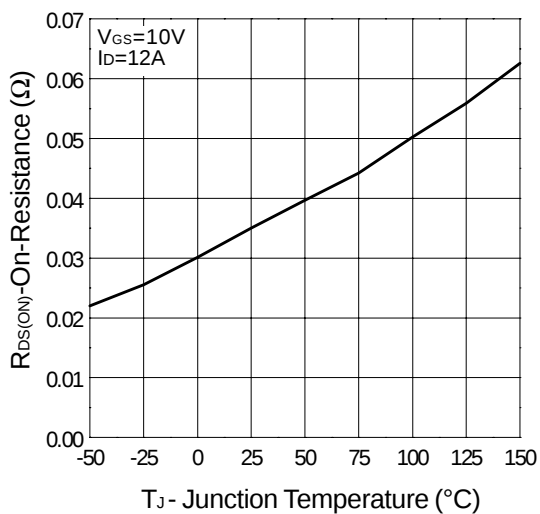



Gate Charge

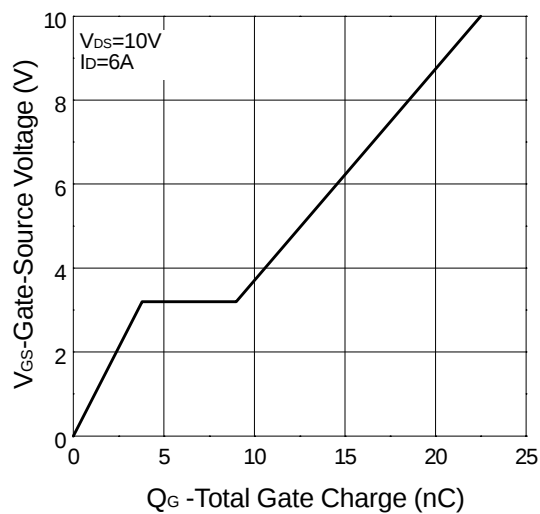

Typical Characteristics

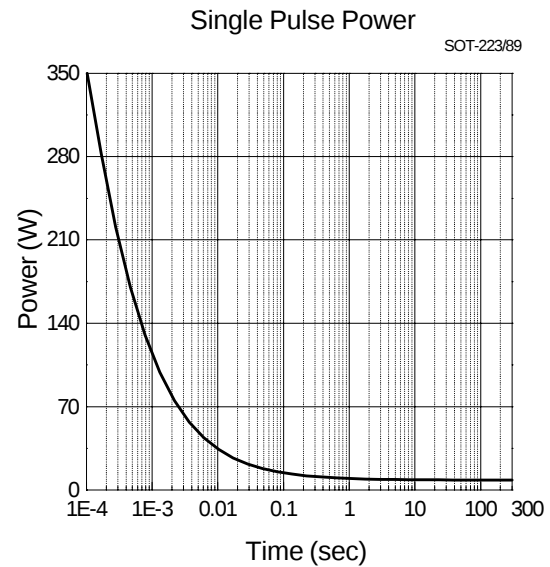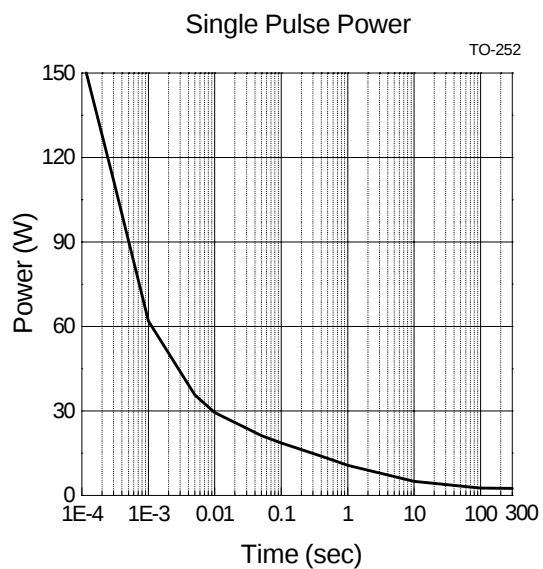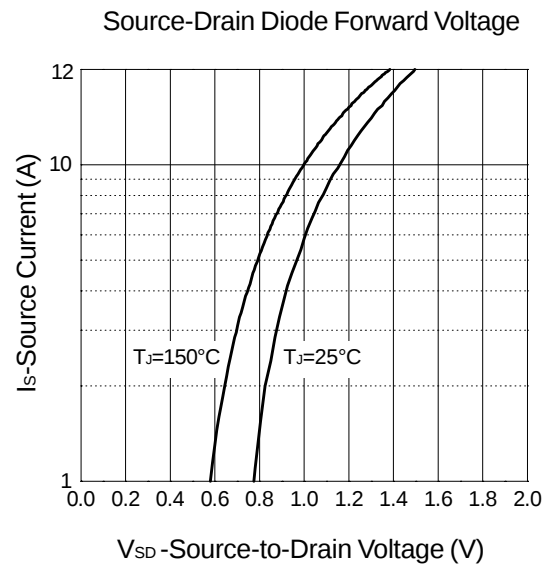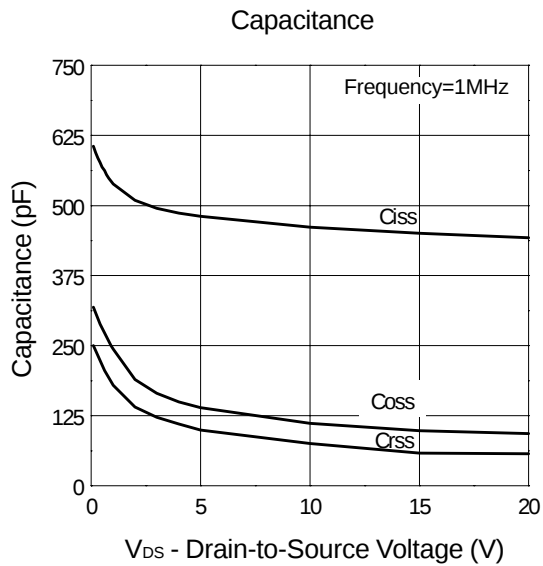


Typical Characteristics

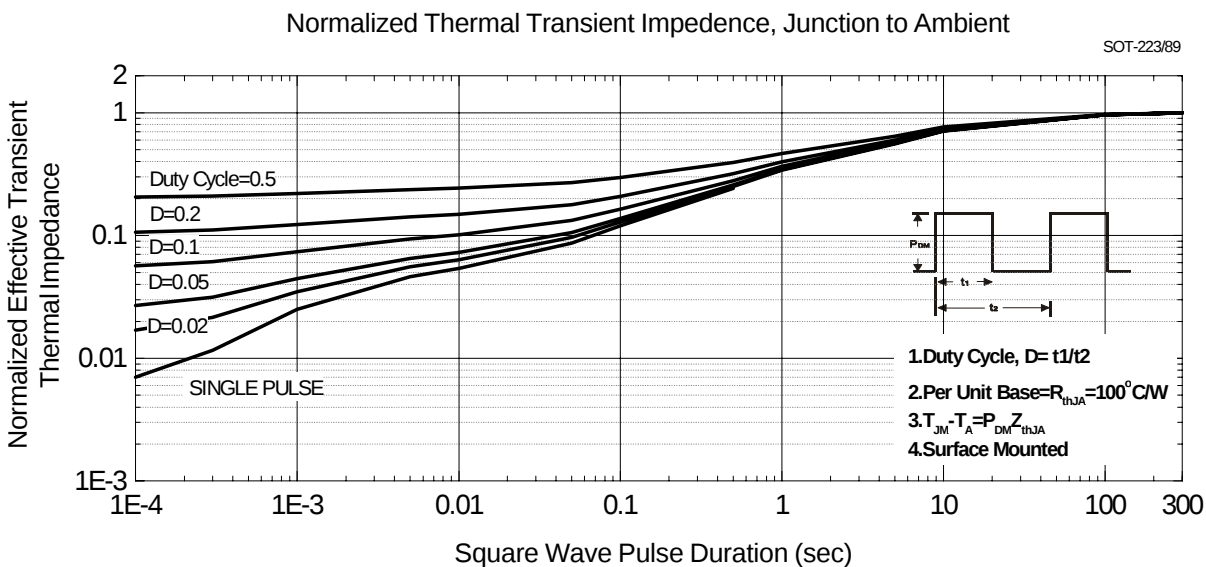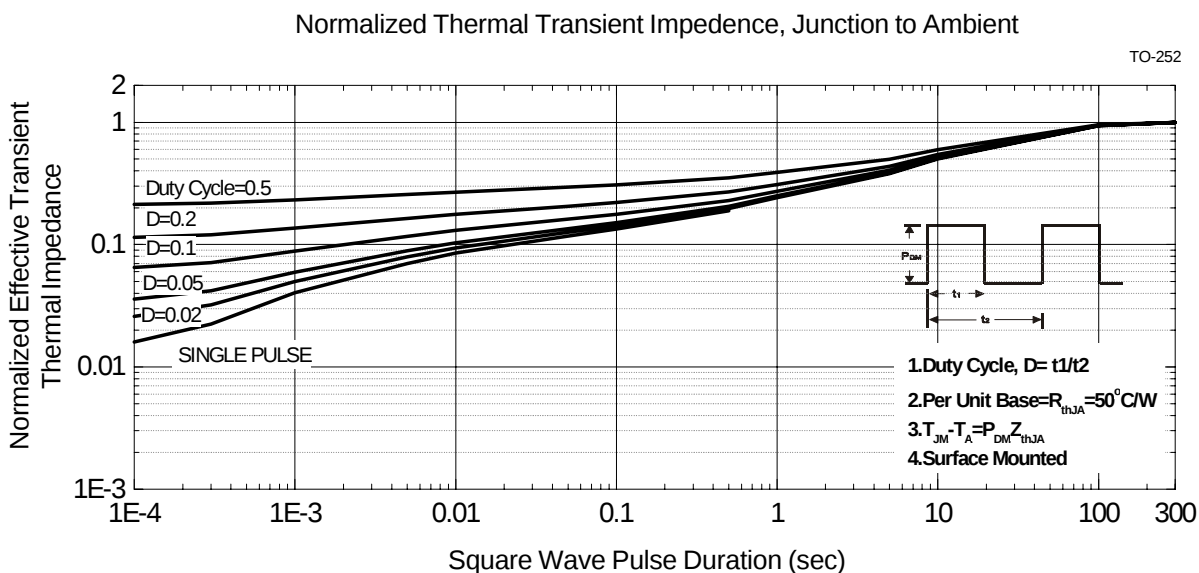

Package Information


TO-252(Reference JEDEC Registration TO-252)

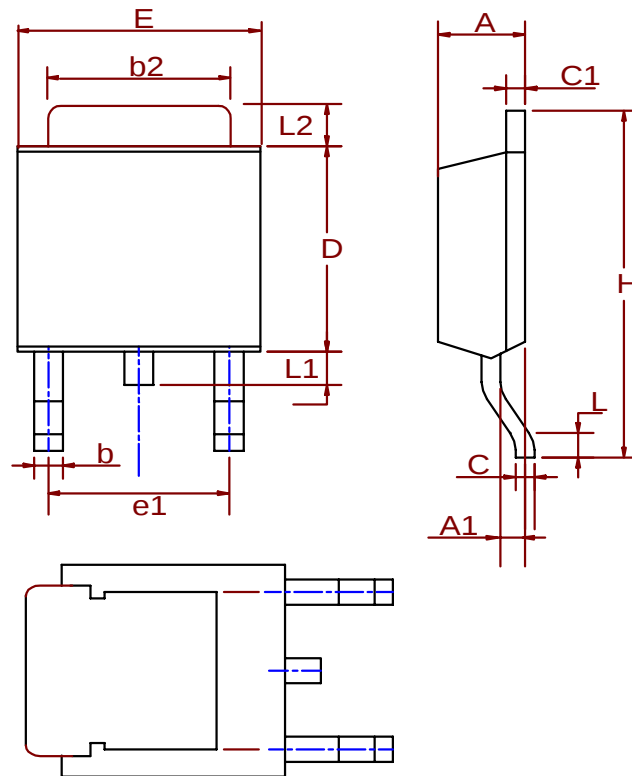

Dim	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	2.18	2.39	0.086	0.094
A1	0.89	1.27	0.035	0.050
b	0.508	0.89	0.020	0.035
b2	5.207	5.461	0.205	0.215
C	0.46	0.58	0.018	0.023
C1	0.46	0.58	0.018	0.023
D	5.334	6.22	0.210	0.245
E	6.35	6.73	0.250	0.265
e1	3.96	5.18	0.156	0.204
H	9.398	10.41	0.370	0.410
L	0.51		0.020	
L1	0.64	1.02	0.025	0.040
L2	0.89	2.032	0.035	0.080

Package Information


SOT-89 (Reference EIAJ ED-7500A Registration SC-62)

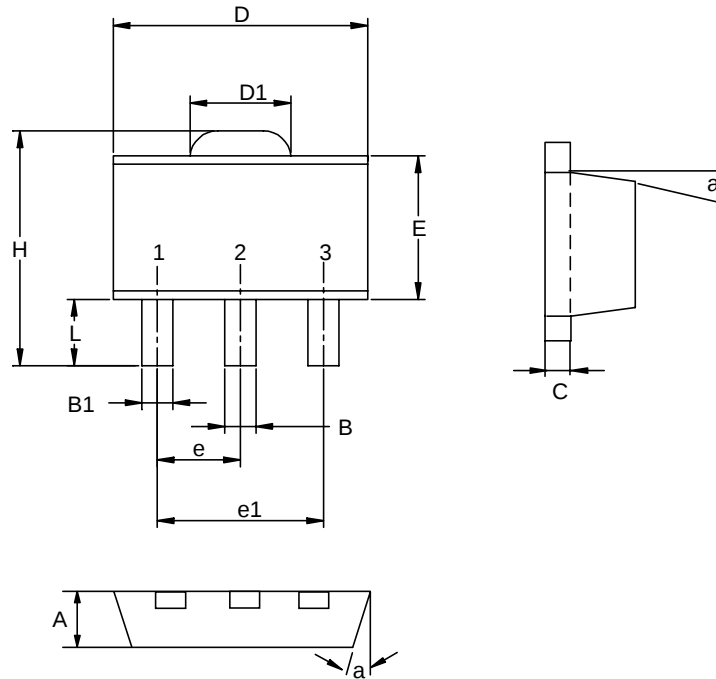

Dim	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	1.40	1.60	0.055	0.063
B	0.40	0.56	0.016	0.022
B1	0.35	0.48	0.014	0.019
C	0.35	0.44	0.014	0.017
D	4.40	4.60	0.173	0.181
D1	1.35	1.83	0.053	0.072
e	1.50 BSC		0.059 BSC	
e1	3.00 BSC		0.118 BSC	
E	2.29	2.60	0.090	0.102
H	3.75	4.25	0.148	0.167
L	0.80	1.20	0.031	0.047
α		10°		10°

Package Information

SOT-223(Reference JEDEC Registration SOT-223)

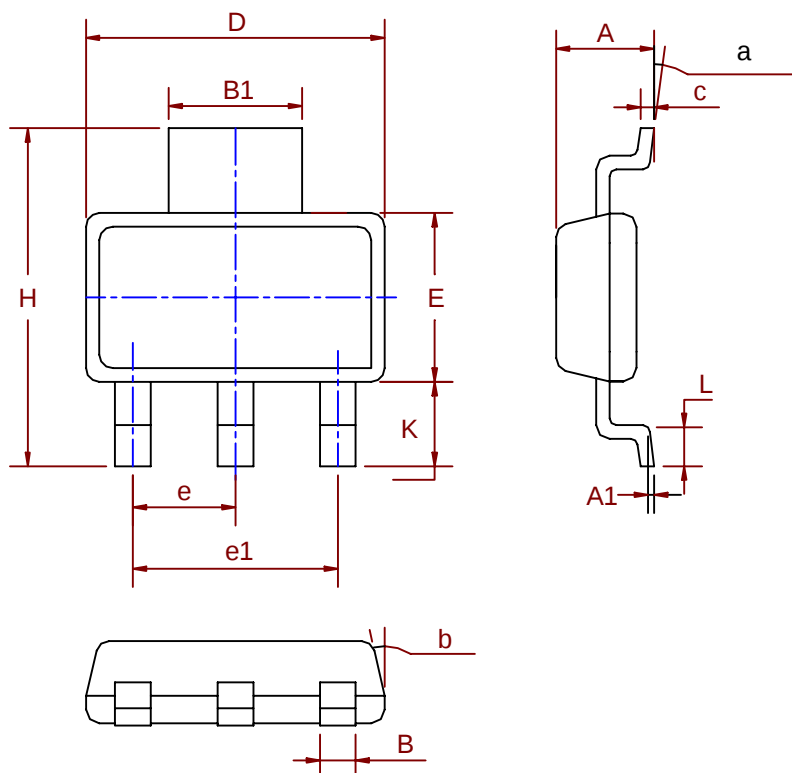


Dim	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	1.50	1.80	0.06	0.07
A1	0.02	0.08		
B	0.60	0.80	0.02	0.03
B1	2.90	3.10	0.11	0.12
c	0.28	0.32	0.01	0.01
D	6.30	6.70	0.25	0.26
E	3.30	3.70	0.13	0.15
e	2.3 BSC		0.09 BSC	
e1	4.6 BSC		0.18 BSC	
H	6.70	7.30	0.26	0.29
L	0.91	1.10	0.04	0.04
K	1.50	2.00	0.06	0.08
α	0°	10°	0°	10°
β	13°		13°	

Physical Specifications

Terminal Material	Solder-Plated Copper (Solder Material : 90/10 or 63/37 SnPb)
Lead Solderability	Meets EIA Specification RSI86-91, ANSI/J-STD-002 Category 3.

Reflow Condition (IR/Convection or VPR Reflow)

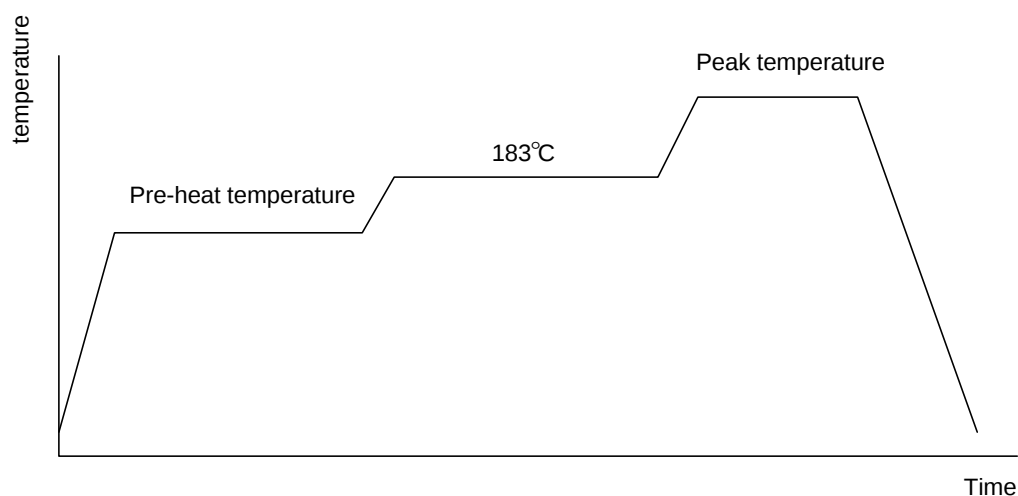


Classification Reflow Profiles

	Convection or IR/ Convection	VPR
Average ramp-up rate(183°C to Peak)	3°C/second max.	10 °C /second max.
Preheat temperature 125 ± 25°C)	120 seconds max	
Temperature maintained above 183°C	60 – 150 seconds	
Time within 5°C of actual peak temperature	10 – 20 seconds	60 seconds
Peak temperature range	220 +5/-0°C or 235 +5/-0°C	215-219°C or 235 +5/-0°C
Ramp-down rate	6 °C /second max.	10 °C /second max.
Time 25°C to peak temperature	6 minutes max.	

Package Reflow Conditions

pkg. thickness ≥ 2.5mm and all bgas	pkg. thickness < 2.5mm and pkg. volume ≥ 350 mm ³	pkg. thickness < 2.5mm and pkg. volume < 350mm ³
Convection 220 +5/-0 °C		Convection 235 +5/-0 °C
VPR 215-219 °C		VPR 235 +5/-0 °C
IR/Convection 220 +5/-0 °C		IR/Convection 235 +5/-0 °C

Reflow Condition (IR/Convection or VPR Reflow)

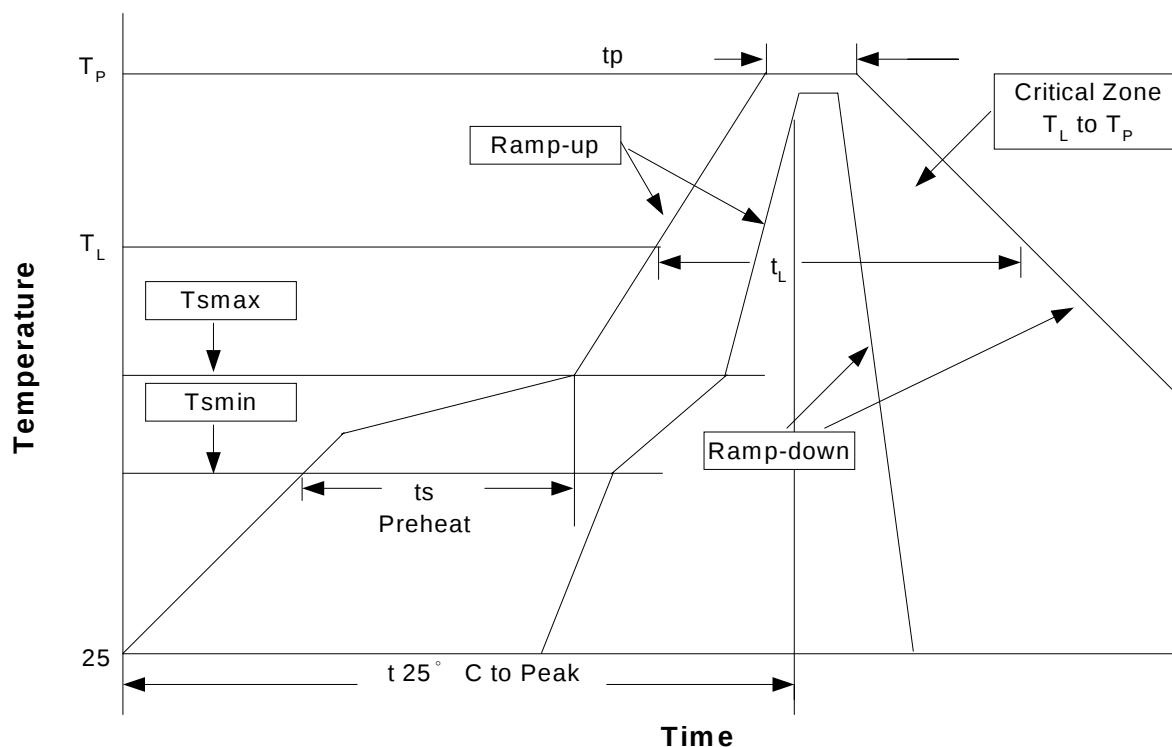

Classification Reflow Profiles


Profile Feature	Sn-Pb Eutectic Assembly		Pb-Free Assembly	
	Large Body	Small Body	Large Body	Small Body
Average ramp-up rate (T_L to T_P)	3°C/second max.		3°C/second max.	
Preheat	100°C 150°C 60-120 seconds		150°C 200°C 60-180 seconds	
T_{smax} to T_L			3°C/second max	
Peak Temperature(T_P)	183°C 60-150 seconds		217°C 60-150 seconds	
Time within 5°C of actual Peak Temperature(t_p)	225 +0/-5°C	240 +0/-5°C	245 +0/-5°C	250 +0/-5°C
Ramp-down Rate	10-30 seconds	10-30 seconds	10-30 seconds	20-40 seconds
Time 25°C to Peak Temperature	6°C/second max. 6 minutes max.		6°C/second max. 8 minutes max.	

Note: All temperatures refer to topside of the package. Measured on the body surface.

Reliability test program

Test item	Method	Description
SOLDERABILITY	MIL-STD-883D-2003	245°C, 5 SEC
HOLT	MIL-STD 883D-1005.7	1000 Hrs Bias @ 125°C
PCT	JESD-22-B, A102	168 Hrs, 100% RH, 121°C
TST	MIL-STD 883D-1011.9	-65°C ~ 150°C, 200 Cycles

Carrier Tape & Reel Dimensions

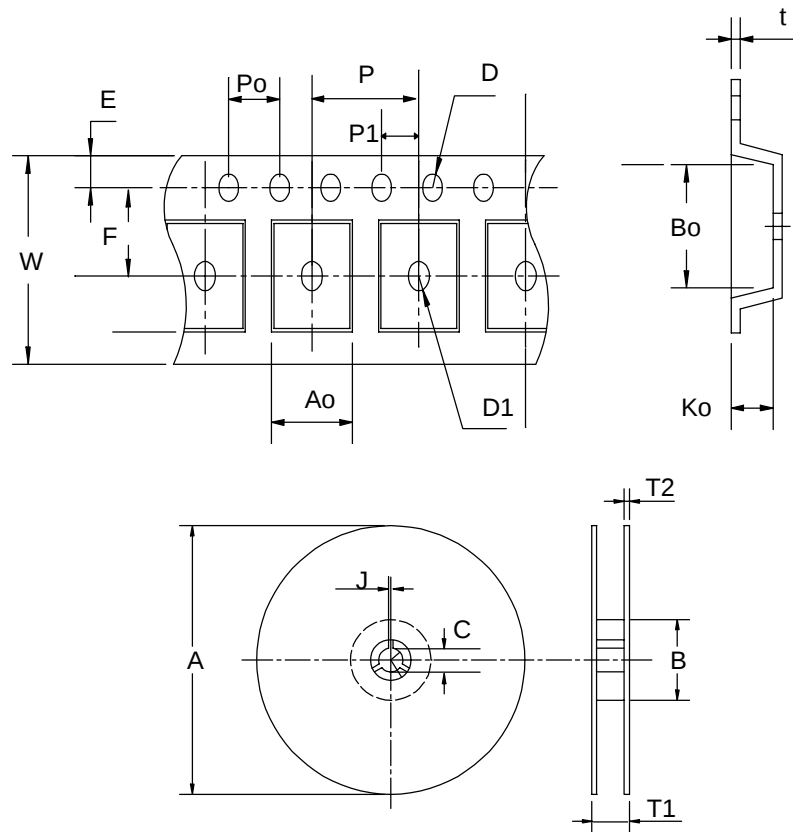

Application	A	B	C	J	T1	T2	W	P	E
TO-252	330 ±3	100 ± 2	13 ± 0.5	2 ± 0.5	16.4 + 0.3 -0.2	2.5 ± 0.5	16 + 0.3 -0.1	8 ± 0.1	1.75 ± 0.1
	F	D	D1	Po	P1	Ao	Bo	Ko	t
	7.5 ± 0.1	1.5 ± 0.1	1.5 ± 0.25	4.0 ± 0.1	2.0 ± 0.1	6.8 ± 0.1	10.4 ± 0.1	2.5 ± 0.1	0.3 ± 0.05
Application	A	B	C	J	T1	T2	W	P	E
SOT-89	178 ±1	70 ± 2	13.5 ± 0.15	3 ± 0.15	14 ± 2	1.3 ± 0.3	12 + 0.3 12 - 0.1	8 ± 0.1	1.75 ± 0.1
	F	D	D1	Po	P1	Ao	Bo	Ko	t
	5.5 ± 0.05	1.5 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	2.0 ± 0.1	4.8 ± 0.1	4.5 ± 0.1	1.80 ± 0.1	0.3 ± 0.013
Application	A	B	C	J	T1	T2	W	P	E
SOT-223	330 ±1	62 ± 1.5	12.75 ± 0.15	2 ± 0.6	12.4 ± 0.2	2 ± 0.2	12 ± 0.3	8 ± 0.1	1.75 ± 0.1
	F	D	D1	Po	P1	Ao	Bo	Ko	t
	5.5 ± 0.05	1.5 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	2.0 ± 0.05	6.9 ± 0.1	7.5 ± 0.1	2.1 ± 0.1	0.3 ± 0.05

Cover Tape Dimensions

Application	Carrier Width	Cover Tape Width	Devices Per Reel
SOT- 89	12	9.3	1000
SOT- 223	12	9.3	2500
TO- 252	16	13.3	2500

Customer Service

Anpec Electronics Corp.

Head Office :

5F, No. 2 Li-Hsin Road, SBIP,

Hsin-Chu, Taiwan, R.O.C.

Tel : 886-3-5642000

Fax : 886-3-5642050

Taipei Branch :

7F, No. 137, Lane 235, Pac Chiao Rd.,

Hsin Tien City, Taipei Hsien, Taiwan, R. O. C.

Tel : 886-2-89191368

Fax : 886-2-89191369