

Small Profile, Bidirectional Transient Voltage Suppressor

Descriptions

The ESD5B5V is an ESD transient voltage suppression component which provides a very high level of protection for sensitive electronic components that may be subjected to electrostatic discharge (ESD). It is particularly well-suited for cellular phones, portable device, digital cameras, power supplies and many other portable applications because of its small package and low weight.

The ESD5B5V is Bidirectional, Safely dissipate ESD strikes of Level 4, IEC61000-4-2, exceeding the maximum requirement. Using the MILSTD-883 (Method 3015) specification for Human Body Model (HBM) ESD, the device provides protection for contact discharges to greater than +/-16KV.

The ESD5B5V is available in a SOD-523 package with peak reverse working voltage of 5 voltages.

Features

- Peak Reverse Working Voltage: 5V
- Peak power up to 100W @ 8 x 20 us Pulse
- Low leakage current
- High ESD protection Level: >+/-16KV per HBM
- IEC61000-4-2 Level 4 ESD Protection
- IEC61000-4-4 Level 4 EFT Protection

Applications

- Cell phone handsets and accessories
- Personal Digital Assistants (PDAs)
- Notebooks, Desktops, and Servers
- Portable Instrumentation
- Digital Cameras
- MP3/MP4/PMP Players



SOD-523

Package Diagram



Pin Configuration



X = Date Code (Month)

B = Special Device Code

Marking Diagram and explain

Order Information


Device	Package	Shipping
ESD5B5V-2/TR	SOD-523	3000/Tape&Reel

Maximum Ratings

Rating	Symbol	Value	Units
Peak pulse power (tp=8/20 us)	Ppk	100	W
Maximum peak pulse current (tp=8/20us)	Ipp	12	A
ESD Per IEC61000-4-2 (Air)	Vpp	+/- 20	KV
ESD Per IEC61000-4-2 (Contact)		+/-15	
Maximum lead temperature for soldering during 10s	TL	260	°C
Storage temperature range	Tstg	-55 to +150	°C
Operating temperature range	Top	-55 to +150	°C

Electronics Parameter

Symbol	Parameter
Vrwm	Peak Reverse Working Voltage
Ir	Reverse Leakage Current @ Vrwm
Vbr	Breakdown Voltage @ It
It	Test Current
Ipp	Maximum Reverse Peak Pulse Current
Vc	Clamping Voltage @ Ipp
Ppk	Peak Power Dissipation
C	Junction Capacitance
If	Forward Current
Vf	Forward Voltage @ If

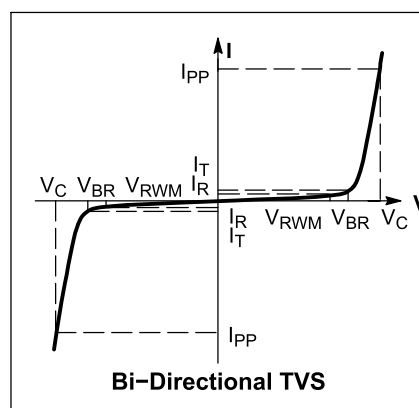

Electronics Characteristics

Device	Marking	Vrwm	Ir (uA)	Vbr (V)	It	Ipp	Vc (V)	Ppk (W)	C
		(V)	@Vrwm	@ It	(mA)	(A)	@ Max Ipp	(8 x 20us)	(pF)
		Max.	Max.	Min.	Typ.	Max.	Max.	Typ.	Typ.
ESD5B5V-2/TR	FB	5.0	1	5.8	1	12	9.5	100	27

Note 1: Vbr is measured with a pulse current It.

Note 2: Surge current waveform per Figure 1.

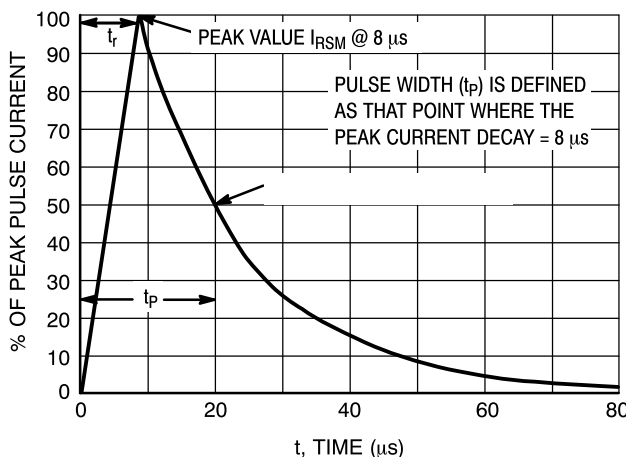


Figure1. 8x20us pulse waveform

Typical Performance Graph

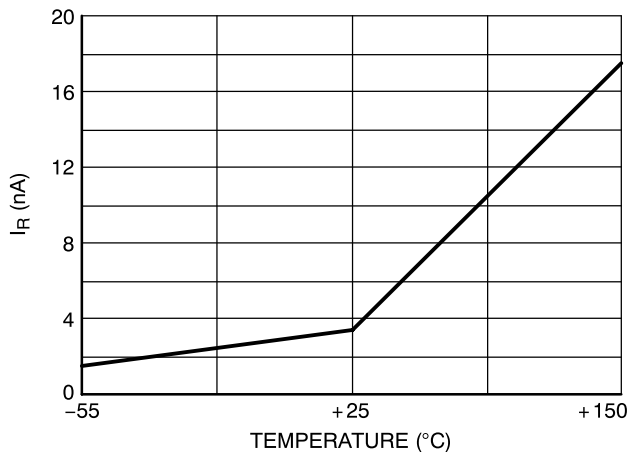
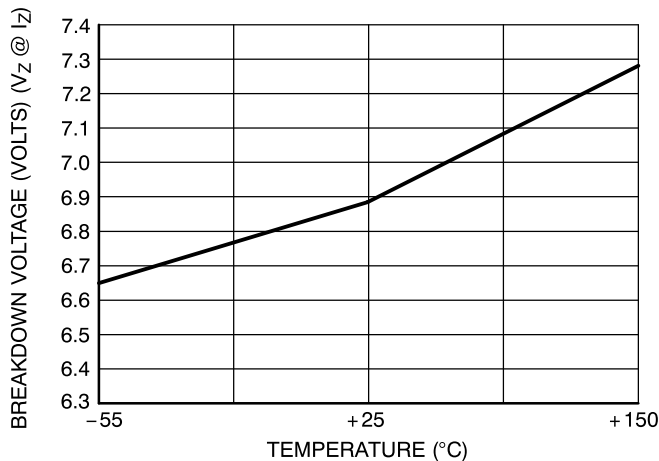


Figure 2. Typical breakdown voltage vs temperature

Figure 3. Typical leakage current vs temperature

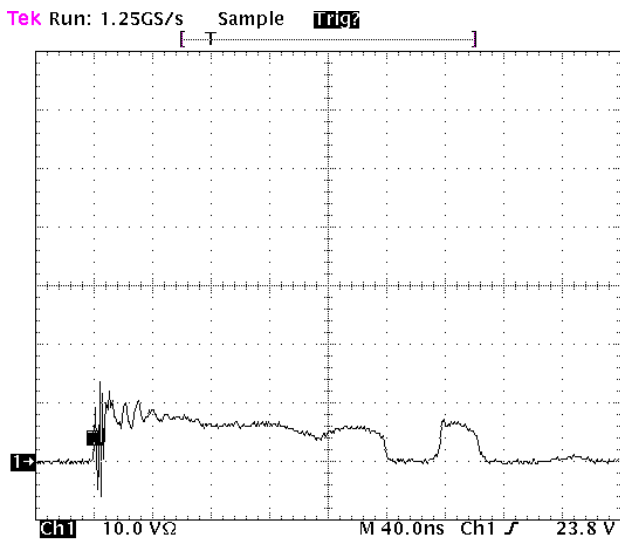


Figure 4. Positive 8 kV Contact per IEC61000-4-2


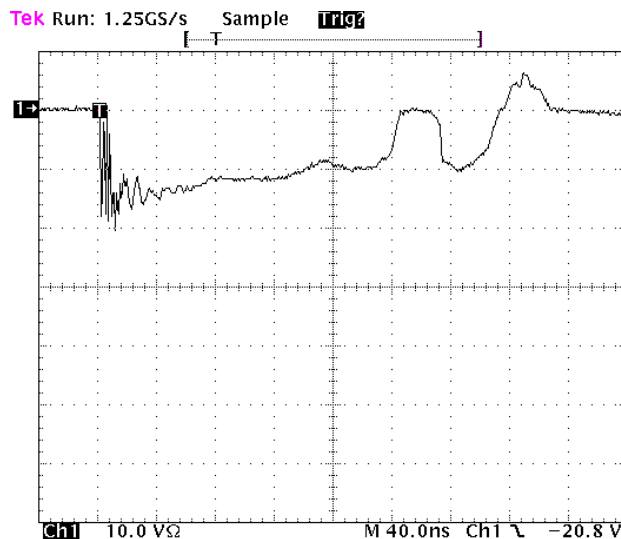


Figure 5. Negative 8 kV Contact per IEC61000-4-2

Package mechanical data

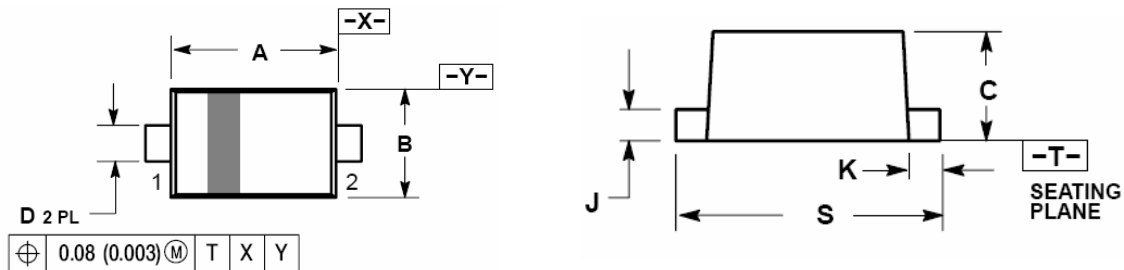

Dim	Millimeters				Inches			
	Min	Nom	Max	Min	Nom	Max	Min	Nom
A	1.10	1.20	1.30	0.043	0.047	0.051	A	1.10
B	0.70	0.80	0.90	0.028	0.032	0.035	B	0.70
C	0.50	0.60	0.70	0.020	0.024	0.028	C	0.50
D	0.25	0.30	0.35	0.010	0.012	0.014	D	0.25
J	0.07	0.14	0.20	0.0028	0.0055	0.0079	J	0.07
K	0.15	0.20	0.25	0.006	0.008	0.010	K	0.15
S	1.50	1.60	1.70	0.059	0.063	0.067	S	1.50