

60mm sq.

San Ace 60

15mm thick (GA type), 15mm thick
 20mm thick (GA type), 20mm thick
 25mm thick (S type), 25mm thick (G type)
 25mm thick, 25mm thick (San Cooler)
 38mm thick (GA type), **38mm thick (GV type)**
 38mm thick (G type)



General Specifications

- Material Frame: Plastics (Flammability: UL94V-0),
 Impeller: Plastics (Flammability: UL94V-1)
- Expected Life Refer to specifications (L10:Survival rate:90% at 60°C ,
 rated voltage, and continuously run in a free air state)
- Lead Wire ⊕red ⊖black (Sensor) yellow (Control) brown
- Storage Temperature -30°C to +70°C (Non-condensing)

60×60×38mm [Mass : 130g] **GV type**

Specifications

The following nos. **have PWM controls, pulse sensors, and ribs.** For ribless, append "1" to the model no.


Model No.	Rated Voltage [V]	Operating Voltage Range [V]	PWM duty cycle※ [%]	Rated Current [A]	Rated Input [W]	Rated Speed [min ⁻¹]	Max. Air Flow [m ³ /min] [CFM]	Max. Static Pressure [Pa] [inchH ₂ O]	SPL [dB(A)]	Operating Temperature Range [°C]	Expected Life [h]	
9GV0612P1G03	12	8.0 to 13.8	100	2.8	33.6	16,000	2.37 84	751 3.02	66	-20 to +70	40,000	
			0	0.12	1.5	3,100	0.44 15	26 0.10	25			
9GV0612P1H03			100	2.0	24.0	14,500	2.15 76	617 2.48	63			
			0	0.1	1.2	2,700	0.40 14	21 0.09	22			
9GV0612P1M03			100	1.5	18.0	13,000	1.93 68	496 1.99	60			
			0	0.08	1.0	2,500	0.38 13	18 0.07	19			
9GV0612P1L01 ^{Note1}		10.8 to 13.8	100	0.7	8.4	10,000	1.49 52.6	293 1.17	52			
9GV0624P1G03		24	20.4 to 27.6	100	1.4	33.6	16,000	2.37 84	751 3.02			66
				0	0.12	2.88	6,000	0.89 31	105 0.42			38
9GV0624P1M03 ^{Note1}				100	0.73	17.52	13,000	1.93 68.0	496 1.99			60
			0	0.08	1.0	2,500	0.38 13	18 0.07	19			
9GV0648P1H03			48	38 to 57	100	0.5	24	14,500	2.15 76			617 2.48
	0				0.08	3.84	6,000	0.89 31	105 0.42	38		

Note : Fan does not rotate when PWM duty cycle is 0%.

※PWM Frequency : 25kHz


- Available options: ⇒ **Without Sensor** **Pulse Sensor**
- Please inquire as the availability of these functions depend on the model. ⇒ **Lock Sensor**

Dimensions (Unit : mm) (With ribs)

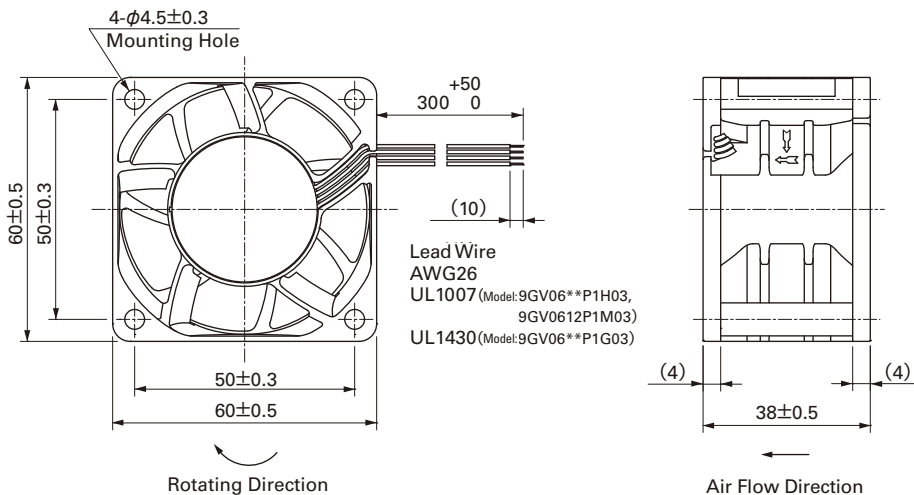

Reference dimension of mounting holes and vent opening (Unit : mm)

Inlet side, Outlet side

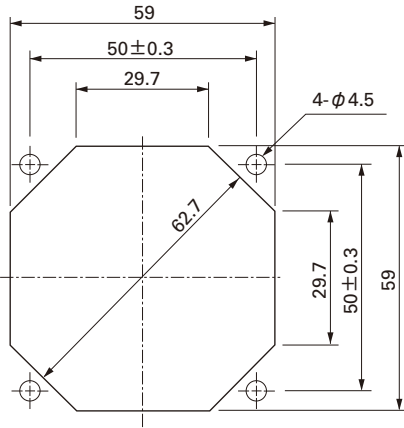


Options (Unit : mm)

Finger guards

Model : 109-139E Surface treatment : Nickel-chrome plating (silver)
 : 109-139H : Cation electropainting (black)


Color

Inlet side, Outlet side

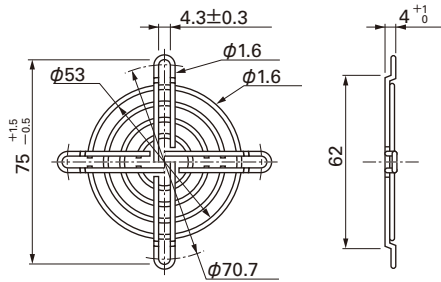


Resin finger guards

Model : 109-1003G

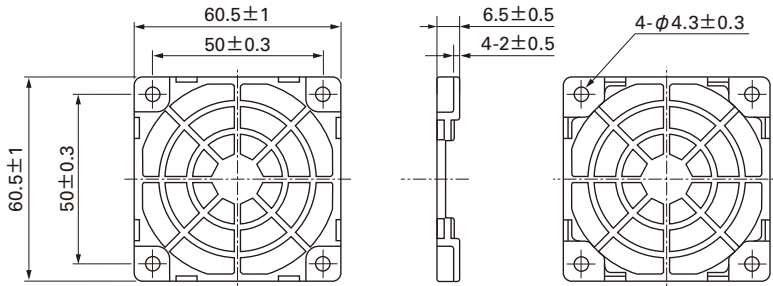


Resin filter kits

Model : 109-1003F13 (13PPI), 109-1003F20 (20PPI)
 : 109-1003F30 (30PPI), 109-1003F40 (40PPI)

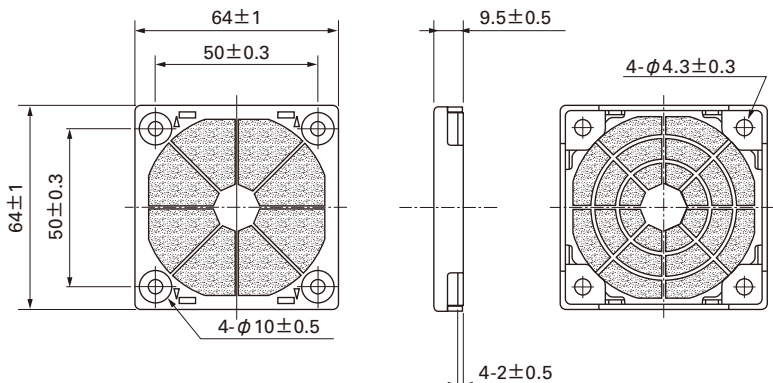


Air Flow - Static Pressure Characteristics

PWM Duty Cycle

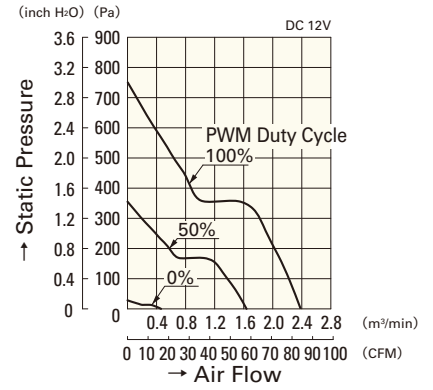


9GV0612P1G03

Operating Voltage Range

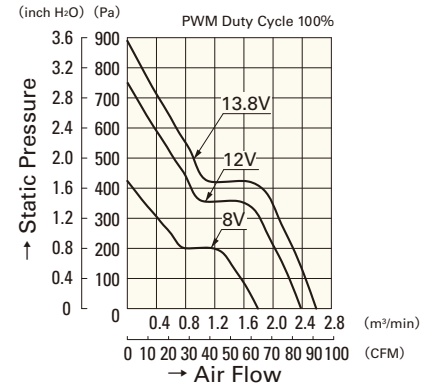

9GV0612P1G03

PWM Duty - Speed Characteristics Example

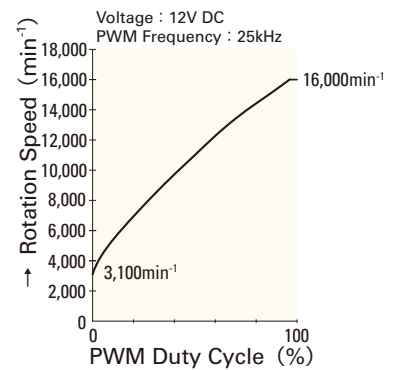

9GV0612P1G03


60mm sq.

San Ace 60


60×60×38mm [Mass : 130g]

Air Flow - Static Pressure Characteristics


PWM Duty Cycle

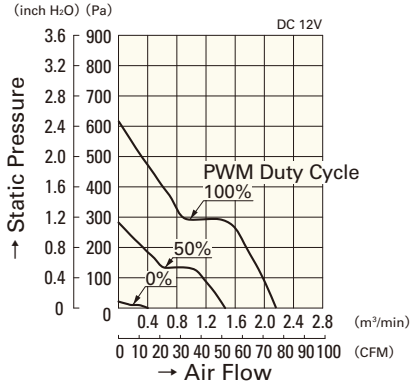

9GV0612P1H03

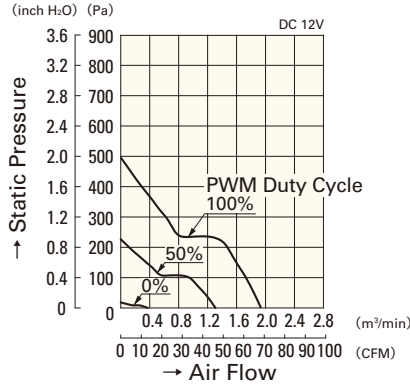


9GV0612P1M03

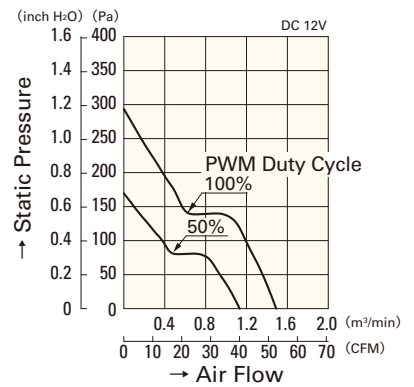


9GV0612P1L01


Operating Voltage Range

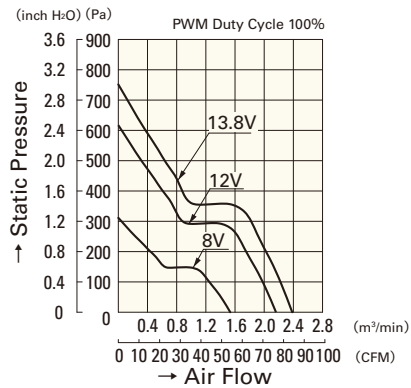

9GV0612P1H03

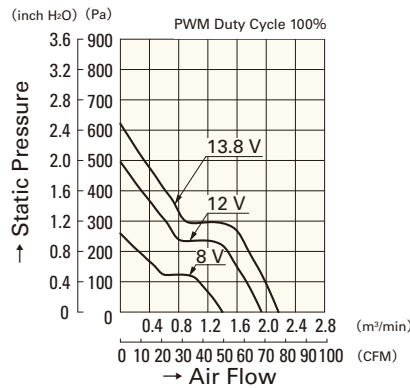


9GV0612P1M03

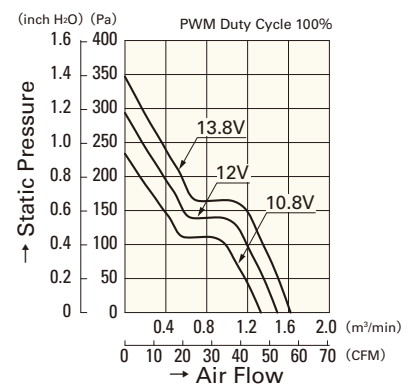


9GV0612P1L01


PWM Duty - Speed Characteristics Example

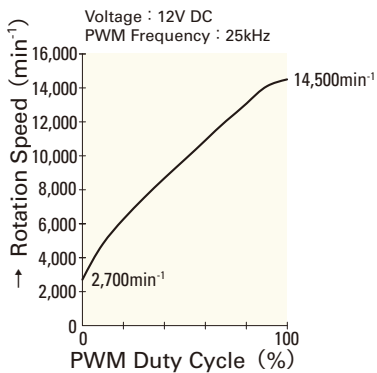


9GV0612P1H03

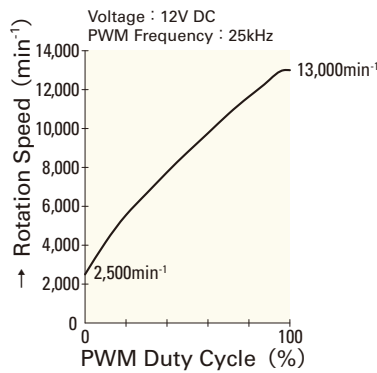


9GV0612P1M03

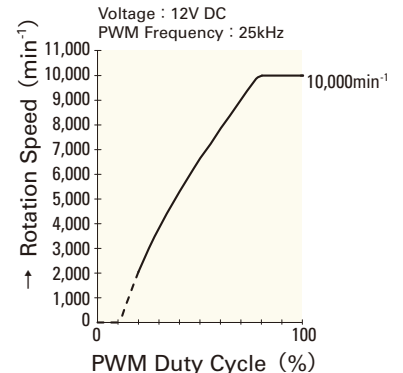


9GV0612P1L01

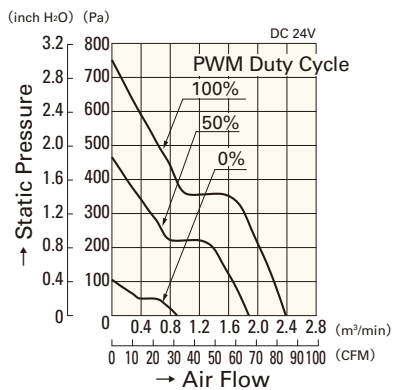


9GV0624P1G03

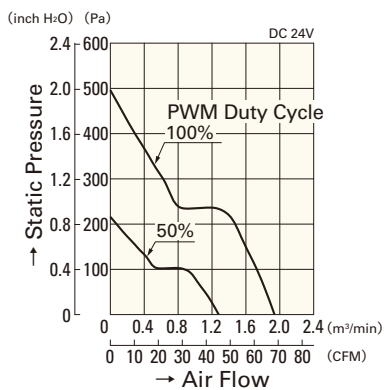


9GV0624P1M03

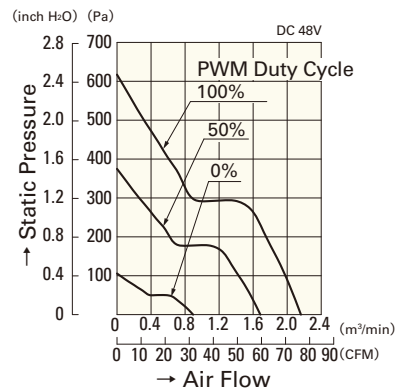


9GV0648P1H03

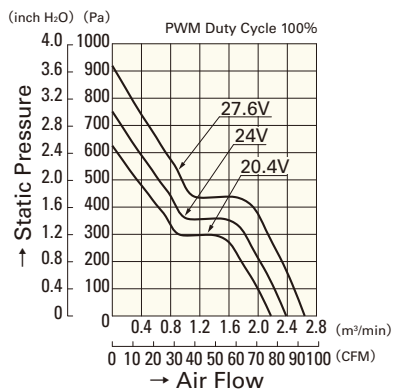


9GV0624P1G03

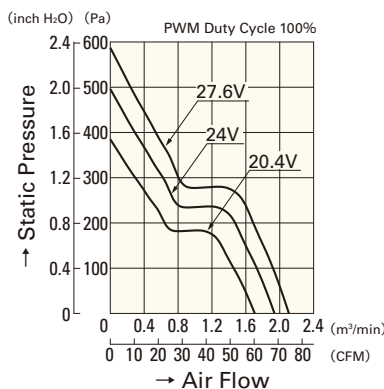


9GV0624P1M03

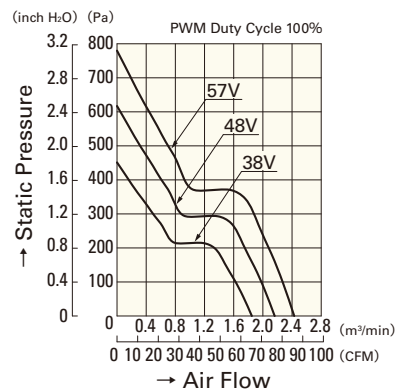


9GV0648P1H03

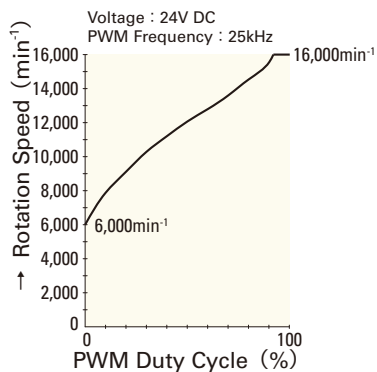

9GV0624P1G03

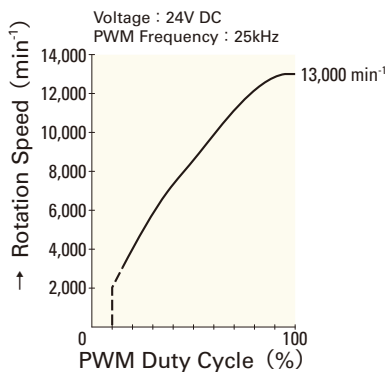

9GV0624P1M03

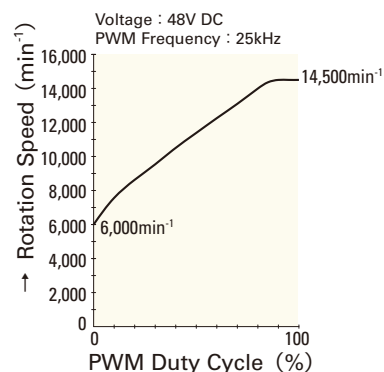

9GV0648P1H03