


Sketch with main dimensions

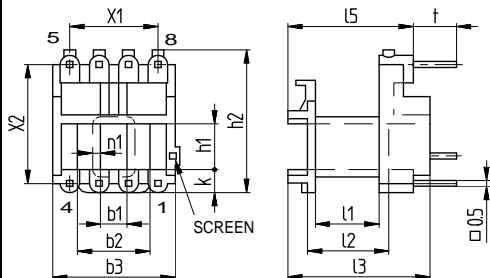

For applications with enlarged creepage distances.


Standard material: Ultramid A3X2G7, natural
Temp. Class B (130° C) UL 94-V0

Creepage distances:

at long bobbin side = 12,00 mm
at short bobbin side = 2,05 mm

X = Additional Pin

ST
with molded-in wires \square 0,5 mm



b1	b2	b3	h1	h2	k	l1	l2	l3	l5	n1	t	X1	X2	X3	Type	Article-No.
± 0,1	± 0,1	± 0,2	± 0,1	± 0,2	± 0,1	± 0,1	± 0,2	± 0,2	± 0,2	+ 0,2	± 0,2	± 0,2	± 0,2	①		
2,7	7,4	12,5	5,0	15,6	2,5	6,5	8,0	14,2	12,5	0,5	4,5	3x3	13,0	2x4	EE 10/5/1 ST Wz 2579/1 ST	7114

Notes: X3 = max. number of slots or terminals



FERYSTER® spółka jawna B. i Z. Sobków
PRODUCENT ELEMENTÓW INDUKCYJNYCH

EE10-K-V-8P-SS-WZ2579