

SHINDENGEN

Super Fast Recovery Rectifiers

Dual

D8LC20UR

200V 8A


FEATURES

- Low noise
- trr35ns
- Fully Isolated Molding

APPLICATION

- Switching power supply
- Free Wheel
- Home Appliances, Office Equipment
- Telecommunication, Factory Automation

OUTLINE DIMENSIONS

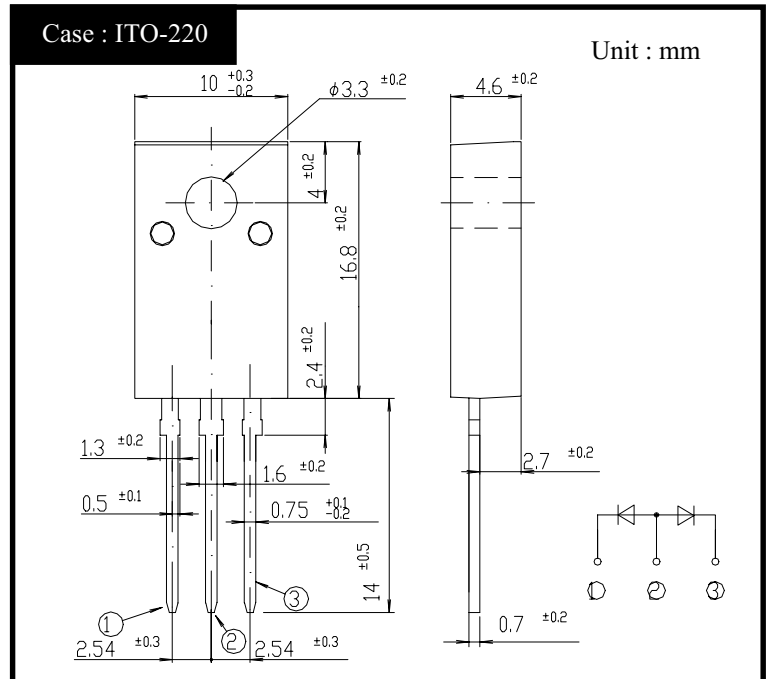

RATINGS


● Absolute Maximum Ratings (If not specified $T_c=25^\circ\text{C}$)

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T_{stg}		-40~150	$^\circ\text{C}$
Operating Junction Temperature	T_j		150	$^\circ\text{C}$
Maximum Reverse Voltage	V_{RM}		200	V
Average Rectified Forward Current	I_o	50Hz sine wave, R-load, Rating for each diode $I_o/2$, $T_c=122^\circ\text{C}$	8	A
Peak Surge Forward Current	I_{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, $T_j=25^\circ\text{C}$	60	A
Dielectric Strength	V_{dis}	Terminals to case, AC 1 minute	1.5	kV
Mounting Torque	TOR	(Recommended torque: 0.3N·m)	0.5	N·m


● Electrical Characteristics (If not specified $T_c=25^\circ\text{C}$)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	$I_F=4\text{A}$, Pulse measurement, Rating of per diode	Max 0.98	V
Reverse Current	I_R	$V_R=V_{RM}$, Pulse measurement, Rating of per diode	Max 10	μA
Reverse Recovery Time	t_{rr}	$I_F=0.5\text{A}$, $I_R=1\text{A}$, Rating of per diode	Max 35	ns
Thermal Resistance	θ_{jc}	junction to case	Max 3.3	$^\circ\text{C}/\text{W}$
	θ_{jf}	junction to heatsink (Reference value)	Max 4.8	


D8LC20UR Forward Voltage

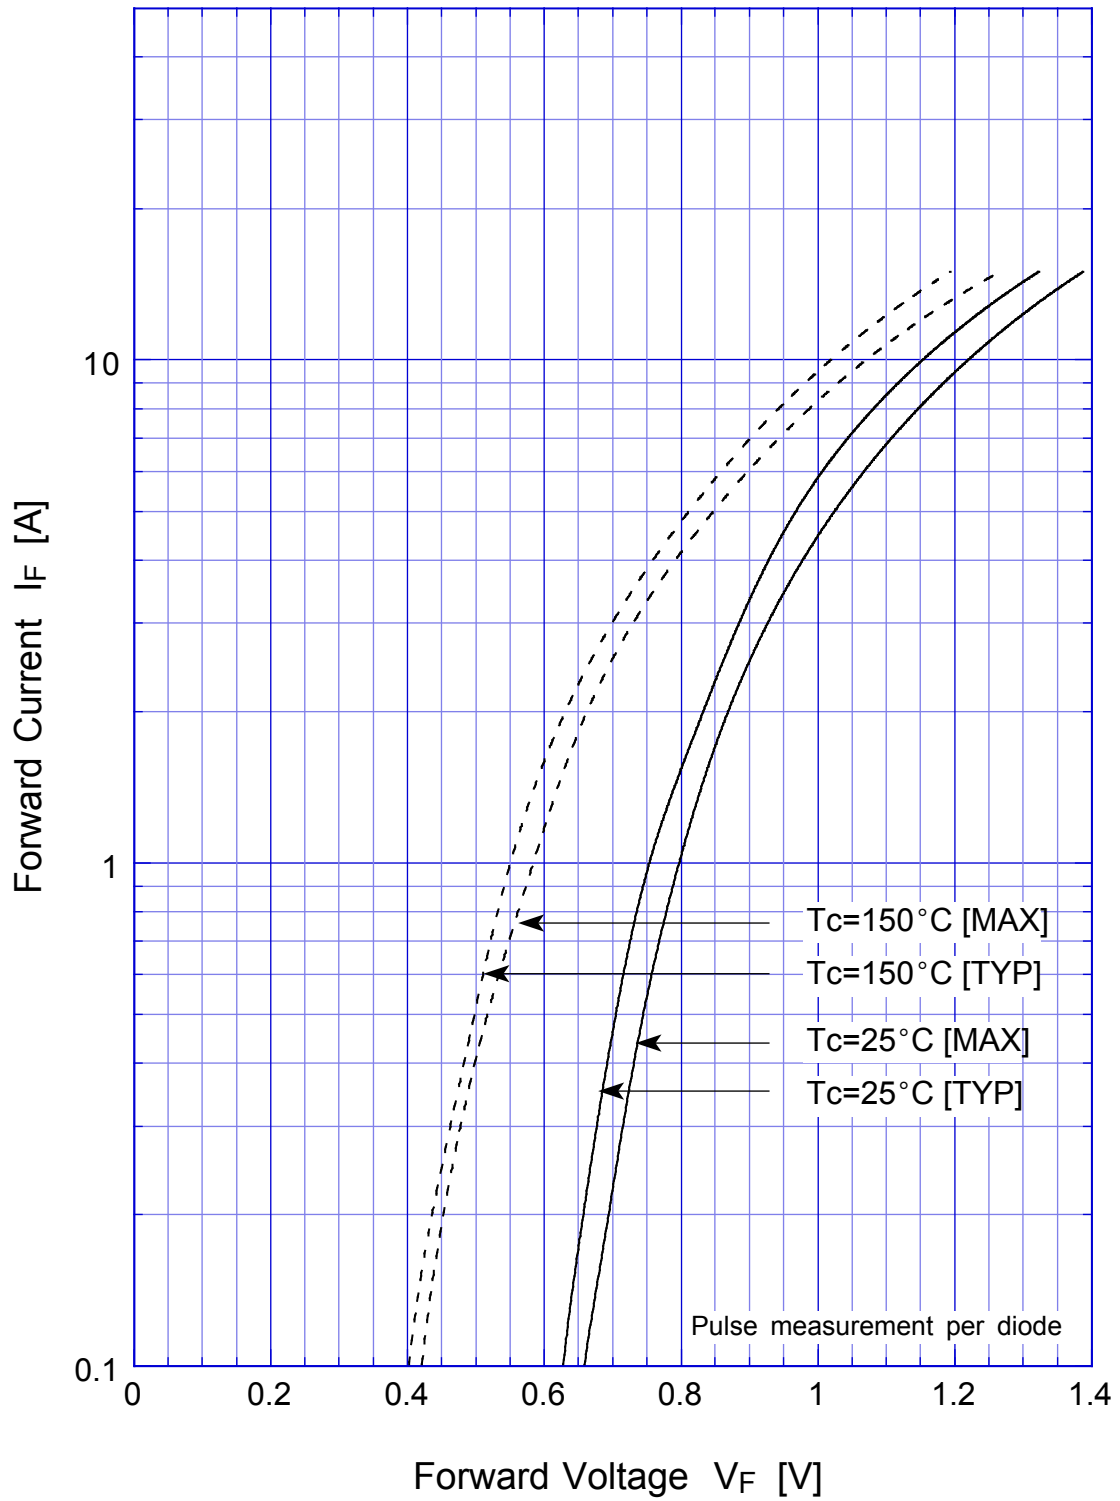

D8LC20UR Forward Power Dissipation

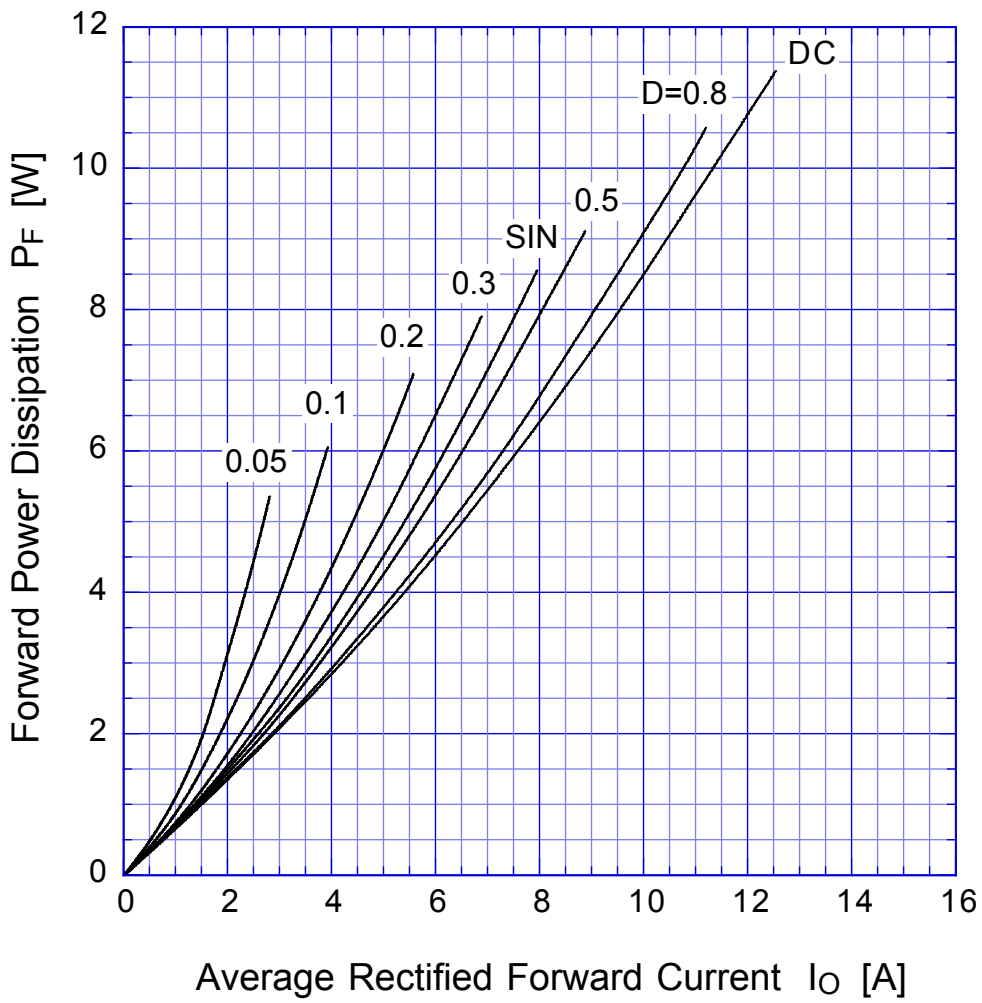


$T_j = T_{jmax}$

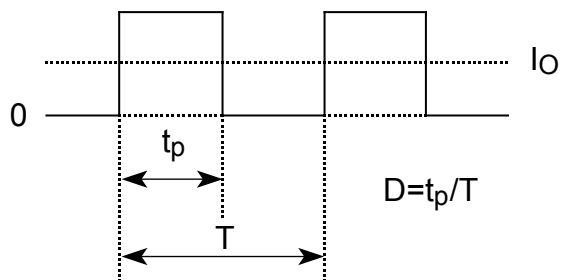

D8LC20UR


Derating Curve

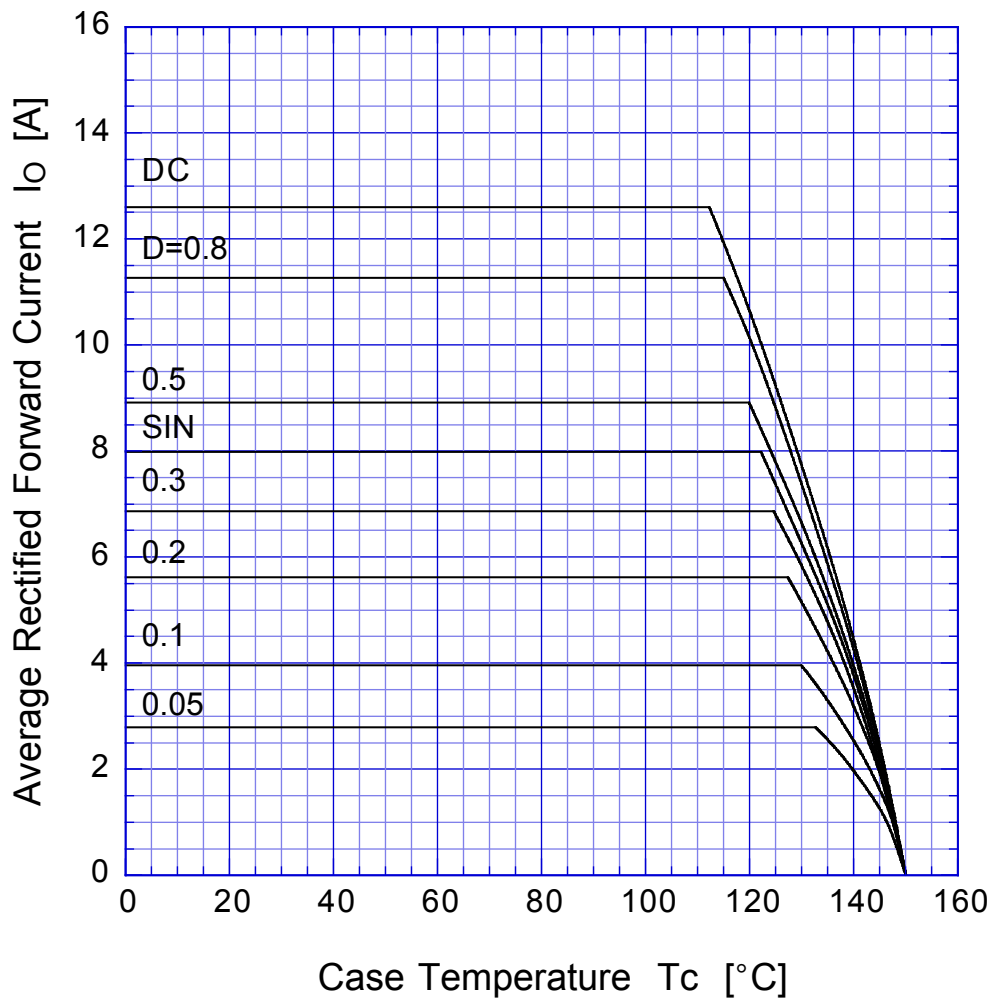

$$V_R = V_{RM}$$



D8LC20UR Peak Surge Forward Capability

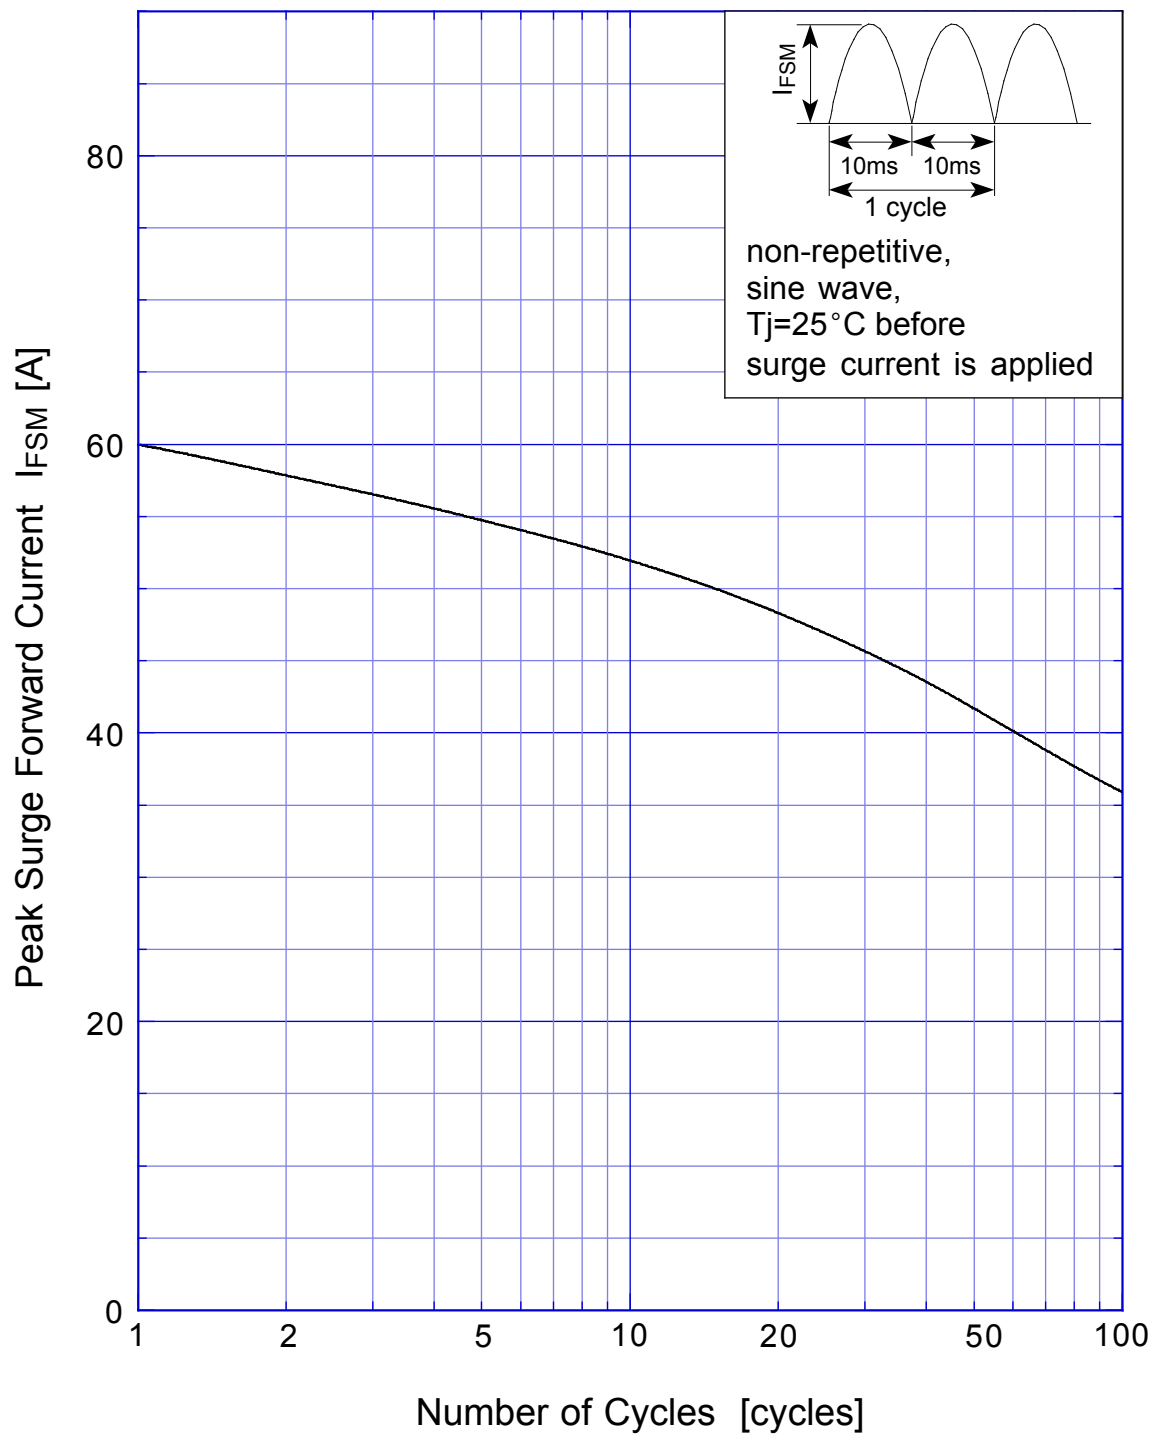

D8LC20UR Junction Capacitance

