
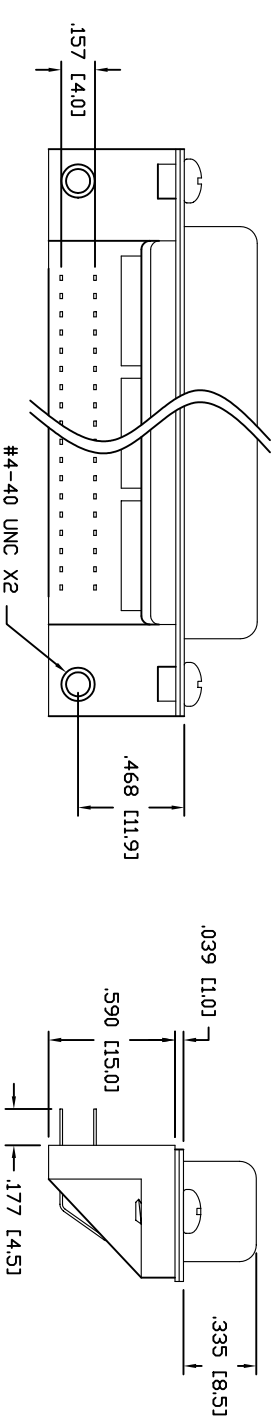


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/16/04	

APPROVED: _____ TITLE: _____
 DATE: _____

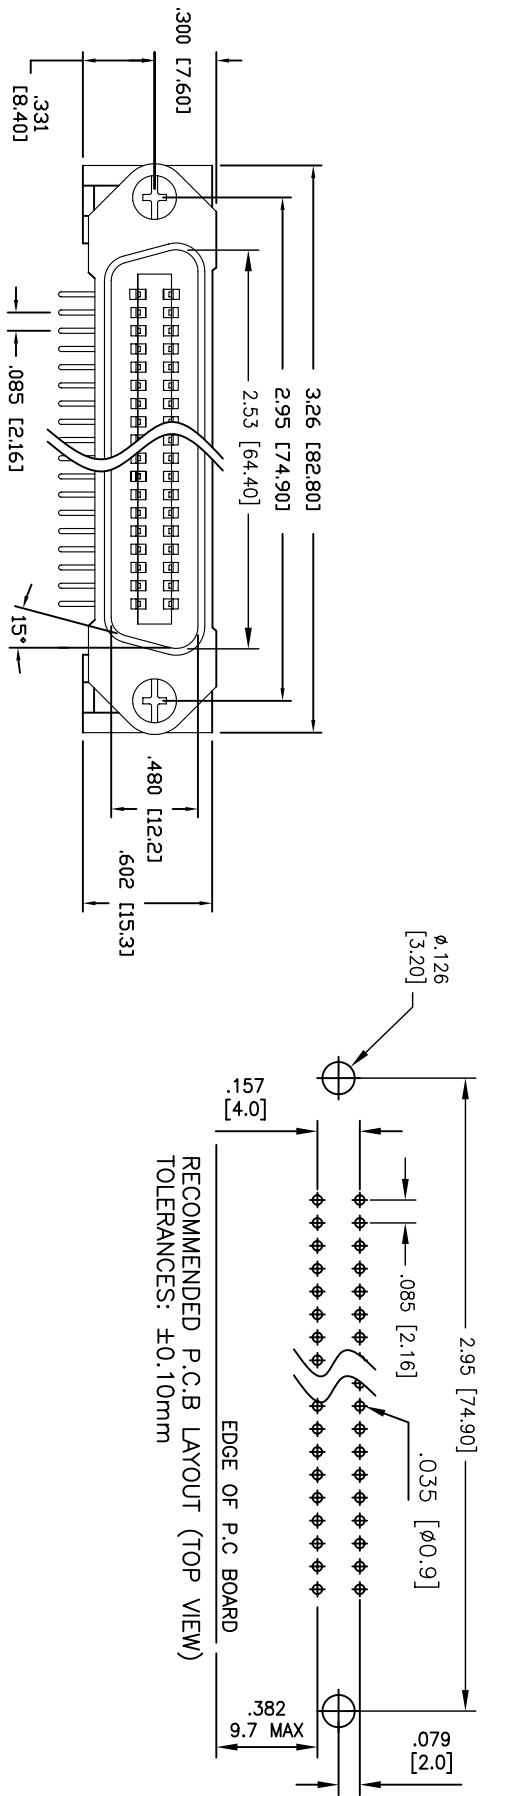

SPECIFICATIONS:

- Material: Insulator: PBT glass reinforced, rated UL-94V-0
- Insulator color: Blue
- Contacts: Phosphor Bronze
- Shell: Steel, Nickel plated.
- Contact Plating: Gold Flash over Nickel underplate on mating area, Tin over Copper underplate on tails.
- Electrical:
 - Operating Voltage: 250V AC
 - Current rating: 1 AMP max.
 - Contact resistance: 35 milliohm Max.
 - Insulation resistance: 1000 megohm Min. at 500V
 - Dielectric withstanding voltage: 1000V AC/1 Min.
 - Temperature Rating: Operating temperature: -55°C~+105°C

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		Holes		DATE	
X	± .10	ØXX	± .10		
.XX	± .020	ØXXX	± .015		
.XXX	± .015	ØXXXX	± .010		
APPROVALS		DATE		TITLE	
DRAWN	SS	6/16/04		MINIATURE RIBBON CONNECTOR 50 POS PLUG, RIGHT ANGLE	
CHECKED				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVED				SIZE	PART NO.
				X	MR50-PD
				REF:	SCALE: NTS
					SHEET 1 OF 1