
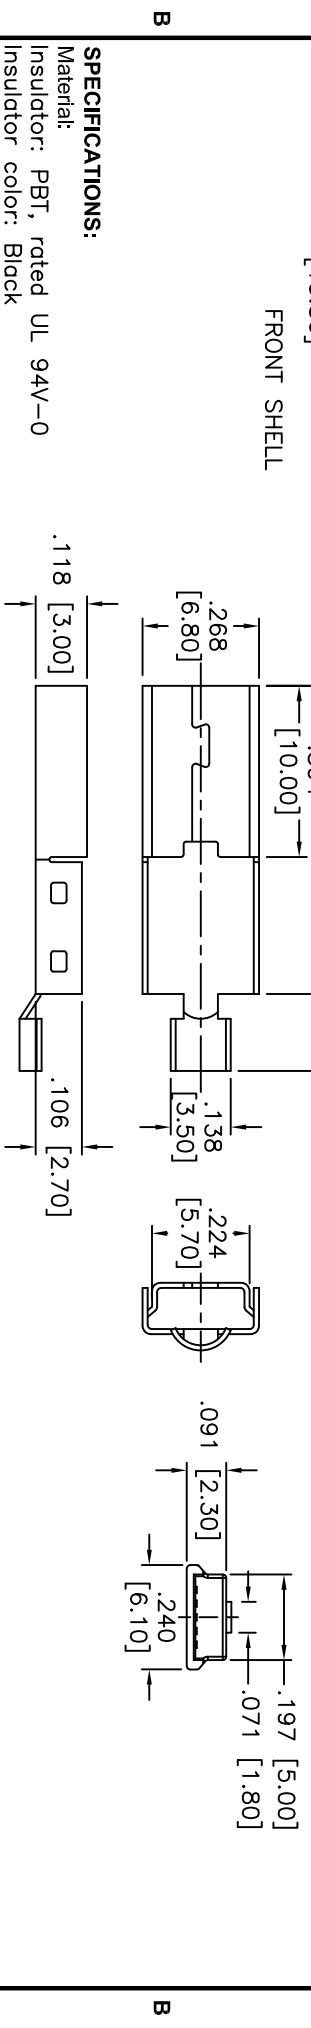


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/26/10	

APPROVED: _____
 DATE: _____ TITLE: _____

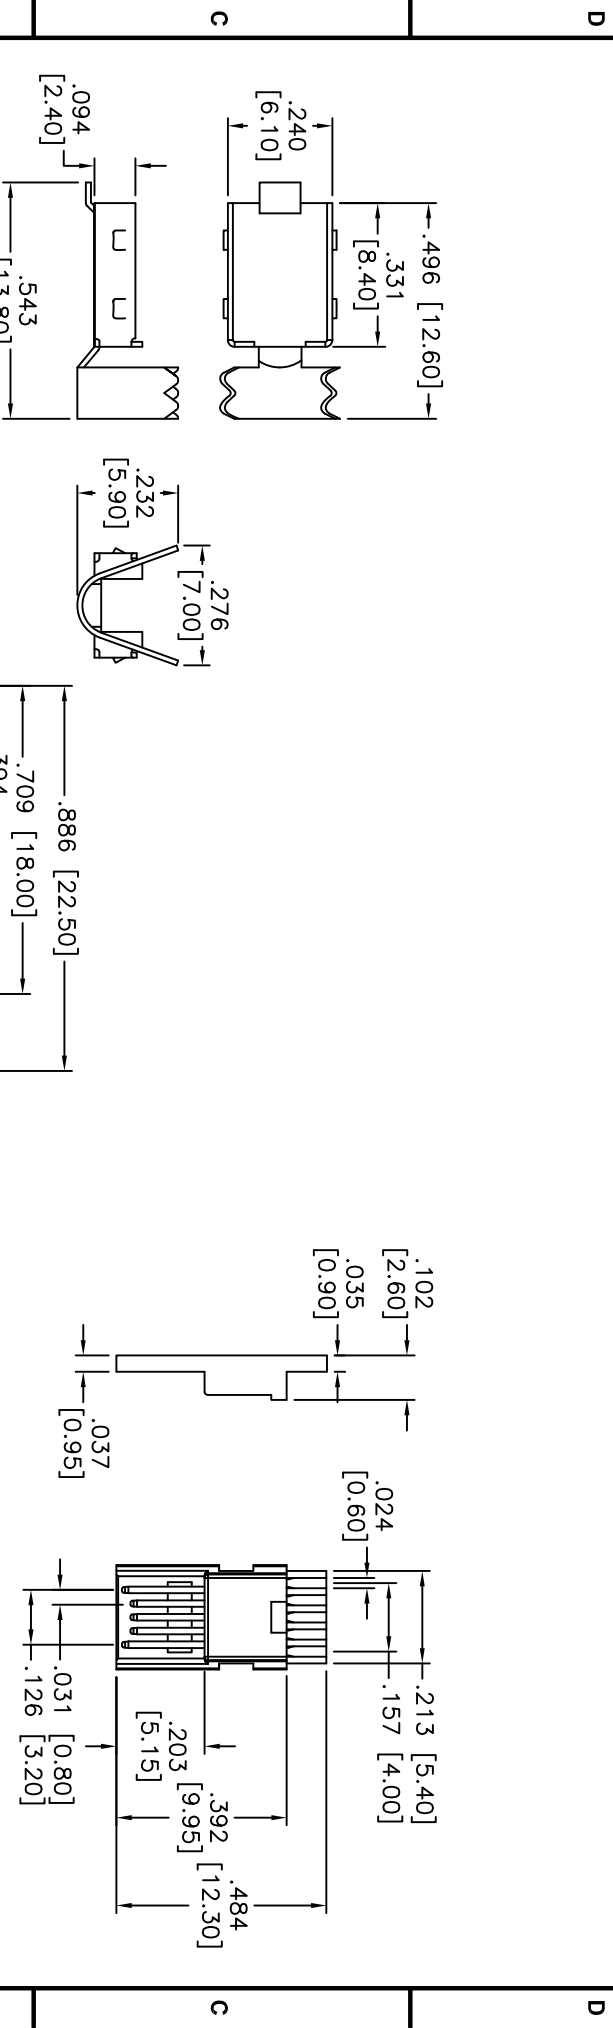

SPECIFICATIONS:
 Material: Insulator: PBT, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Shell: Cold rolled steel, Nickel plated.
Plating:
 Gold Flash over Nickel underplate on contact area,
 Tin over Copper underplate on PCB tails

Electrical:
 Current rating: 1 Amps max
 Contact resistance: 30 Mohms max
 Insulation resistance: 1000 Mohms min @ DC500V
 Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:
 Operating temperature: -55°C to +105°C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XXX ± .015
.XXX ± .015	Ø.XXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	7/26/10
APPROVED	

ADAM TECH
 909 Ratway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

MINI USB, 5PIN, MALE SOLDER

SIZE	PART NO.	REV.
X	MUSB-B5-P3-S5	
REF:	S00728T	SHEET 1 OF 1
SCALE:	NTS	