




RM6 INDUCTOR

ARM6-4102

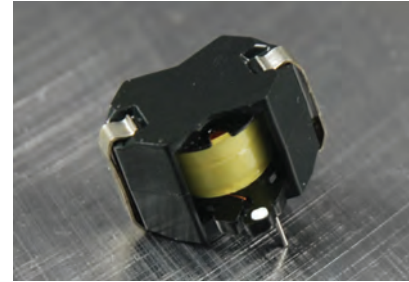


- RM6 Core Design
- Made with UL Approved Materials

| Primary Electrical Specifications @ 25°C | | |
|--|---------------|-----------------|
| INDUCTANCE @ 1KHZ, 0.3V | DC RESISTANCE | HI-POT |
| L (2 - 3) | R(2 - 3) | Winding to Core |
| 570mH±10% | 40.0Ω Max | 200VAC/1mA/1SEC |

All specifications subject to change without notice.

MECHANICAL

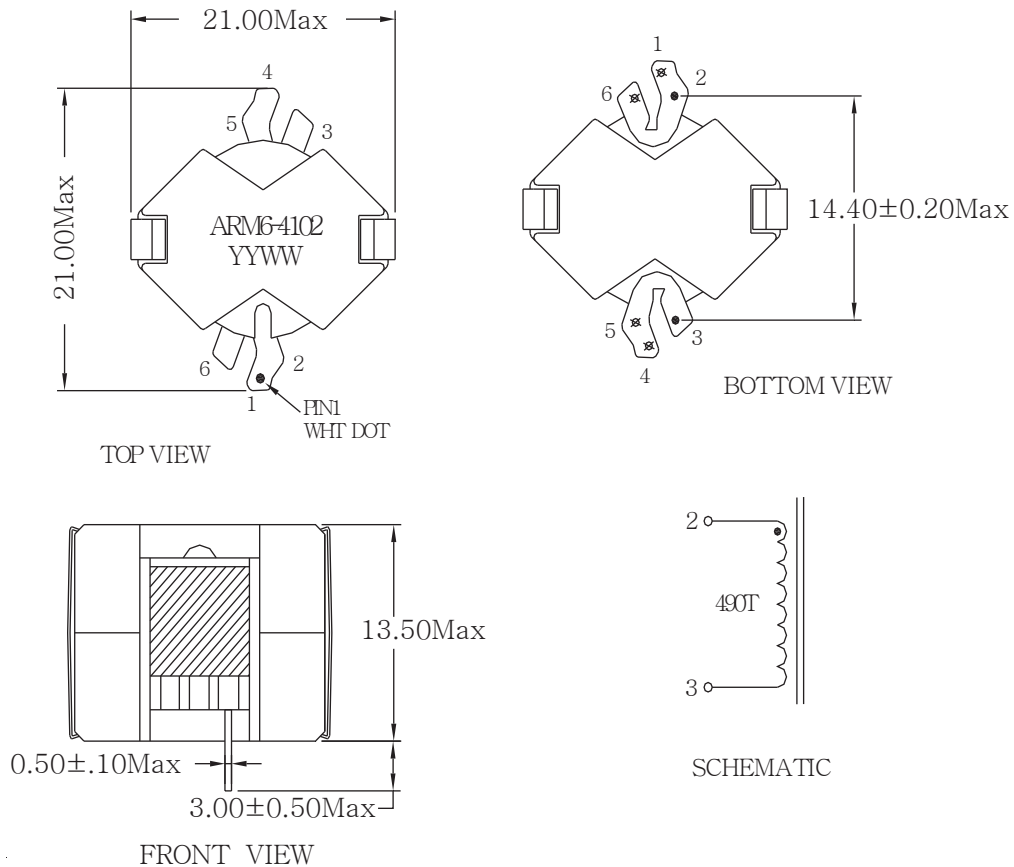

NOTE: REMOVE PIN 1, 4, 5 & 6