



397 Route 281 – P.O. Box 1175  
 Tully, New York 13159-1175  
 Phone: 315 696-6676  
 Fax: 315 696 9923  
 Email: sales@acipower.com  
 www.acipower.com

# ACR-0853-2008

PRODUCT DATA SHEET – PAGE 1 OF 2

## 13.900" TRI BANK LED RAIL

(Tri Bank, 85V @ 46.7mA)

04/27/12

### GENERAL DESCRIPTION


The ACR-0853-2008 is designed as a replacement for field replaceable, dual tube, dual edge lit 17.0" CCFL displays.

The rail requires the use of a constant current source to properly drive the LED's.

The LED rail is compatible with any of ACI's I-Drive series of LED Drivers.

### MECHANICAL / ENVIRONMENTAL

- Weight = 11 grams
- Altitude = 35,000 Ft maximum
- Humidity < 95% non-condensing
- Size (L x W x H) = 13.900 IN x 0.230 IN x .072 IN
- PCB thickness = 0.032 IN
- RoHS compliant

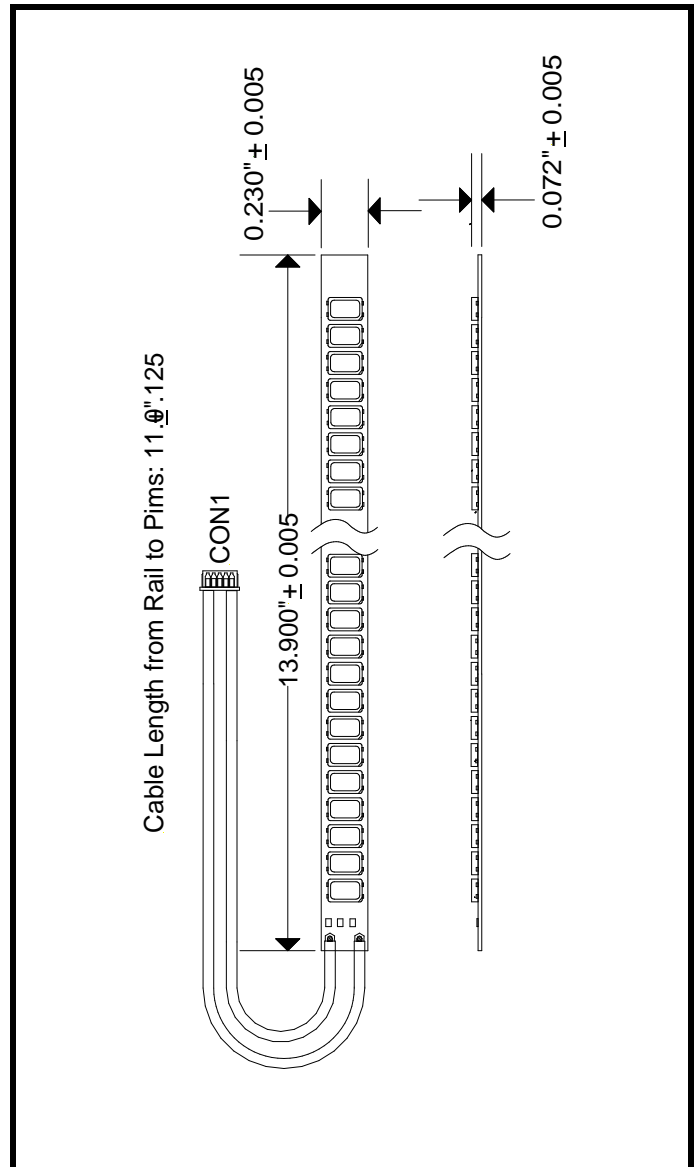

**397 Route 281 – P.O. Box 1175  
Tully, New York 13159-1175  
Phone: 315 696-6676  
Fax: 315 696 9923  
Email: sales@acipower.com  
www.acipower.com**

PRODUCT DATA SHEET – PAGE 2 OF 2

**MAXIMUM RATINGS**

04/27/12

Symbol	Parameter	Value	Unit
Tled	Operating temperature of LED edge light (light rail contact)	-40 to +100	Deg-C
Tstg	LED Rail storage temperature	-40 to +100	Deg-C
Ifwd	LED forward current	56.0	mA

**LED OPTICAL CHARACTERISTICS**

LED Manufacturer specifications for reference purpose only

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
v	Luminance Intensity	Ifwd = 110mA	26.3	-	28.9	lm
Cx	White X coordinate			0.290		-
Cy	White Y coordinate			0.268		-

**LED RAIL ELECTRICAL CHARACTERISTICS**

Ifwd = 46.7mA (3 Banks per Rail, 2 Rails per Display), Tled = +75Deg-C (LED's without heat sinking to the display)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Vfwd	LED rail forward voltage drop		76	85	94	Vdc

**TYPICAL LED RAIL PERFORMANCE GRAPHS**

