

6

5

4




3

2

1

APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/19/07	
A		REVISED COLOR	6/21/10	

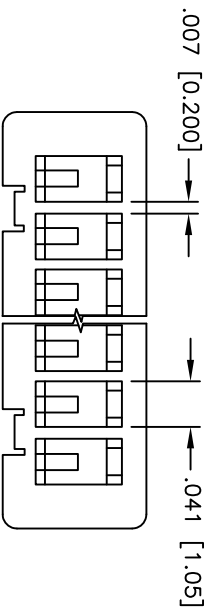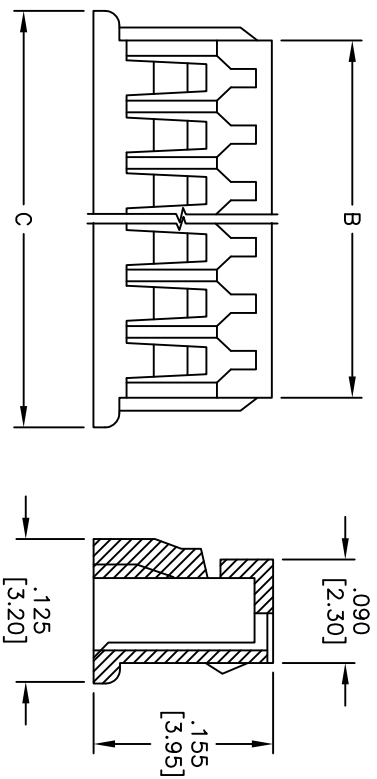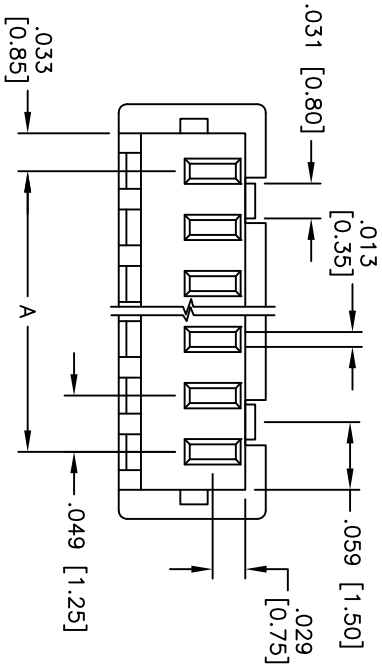

A=.049 [1.25] X NO. OF SPACES +.066 [1.70]
 B=.049 [1.25] X NO. OF SPACES
 C=.049 [1.25] X NO. OF SPACES +.118 [3.00]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES: .10 ±.10 ØXX ±.10
 .XX ±.020 ØXXX ±.015
 .XXX ±.015 ØXXXX ±.010

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 1.25mm HOUSING

SPECIFICATIONS:
 Material: Insulator: Nylon 66, rated UL 94V-0
 Insulator color: White
 Electrical: Operating voltage: 250 VAC max
 Current rating: 1 Amp max
 Contact resistance: 20 mohms max.
 Insulation resistance: 1,000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 250 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +85°C
 Environmental: Lead free, RoHS compliant



APPROVALS	DATE
DRAWN: BW	01/17/07
CHECKED:	
APPROVED:	

SIZE: X	PART NO.: 125CH-B-XX	REV.:
REF:	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1