
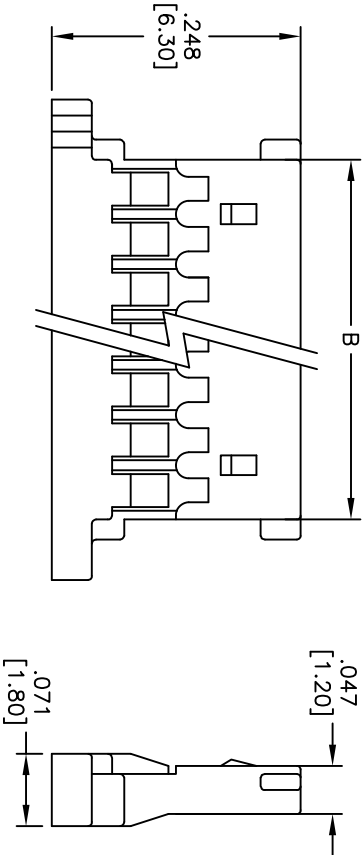


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/30/10	

APPROVED: _____

DATE: _____ TITLE: _____

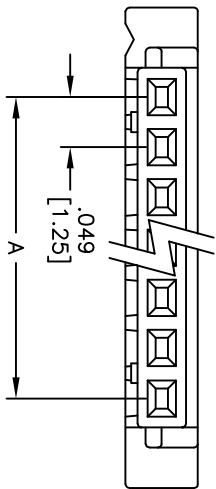

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: White

Electrical:

Voltage rating: 100 VAC/DC max

Current rating: 1 Amp max

Insulation resistance: 100 Mohms min

Dielectric withstanding voltage: 250 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.



Positions: 2 thru 16, 18, 20, 22, 24, 26, 28, 30
 A = .049 [1.25] X No. of Spaces
 B = .049 [1.25] X No. of Positions + .057 [1.45]

UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN AY	11/30/10
CHECKED AH	11/30/10
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .049 [1.25] PITCH CRIMP HOUSING
 SINGLE ROW, 2 THRU 30 POSITIONS

SIZE	PART NO.	REV.
X	125CH-G-XX	-
REF: S00004T	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1