



Rev	AWO #	Description	Date	Appr
-		RELEASED	7/05/11	

APPROVED: _____
 DATE: _____ TITLE: _____

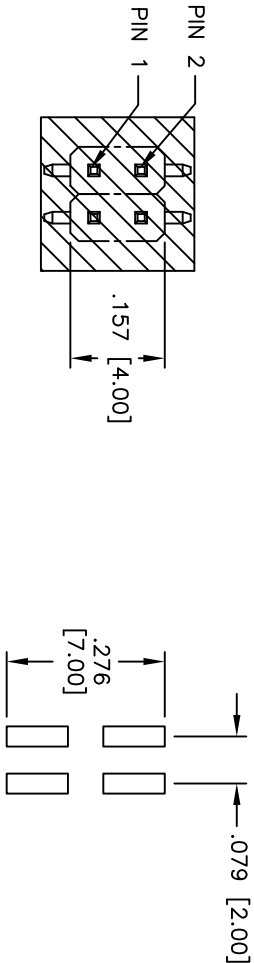

RECOMMENDED PCB LAYOUT

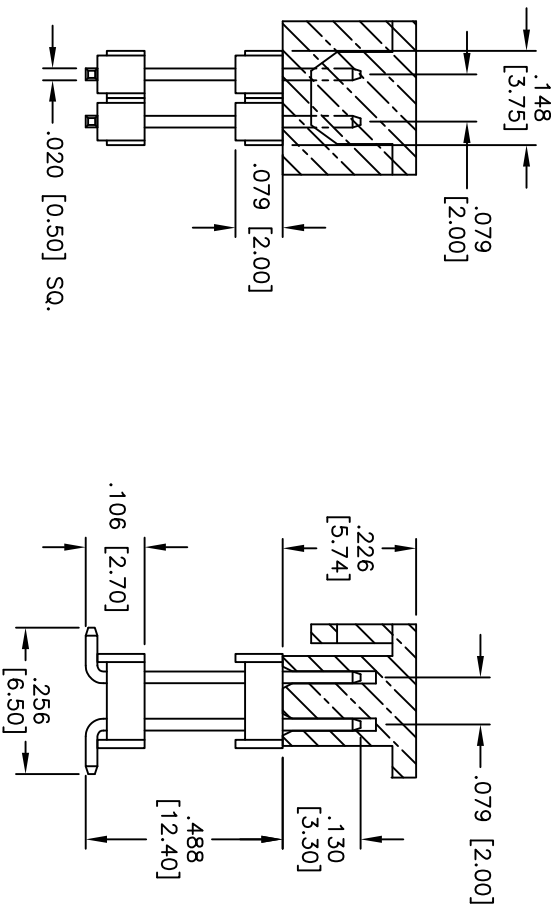

PACKAGED ON TAPE & REEL

SPECIFICATIONS:

Material: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Brass

Plating:
 Gold flash over Nickel underplate overall.

Electrical:
 Current rating: 1 Amp max
 Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
 Operating temperature: -55°C to +105°C

Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] DUAL ROW PIN HEADER
 DUAL INSULATOR, SURFACE MOUNT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	7/05/11
APPROVED	

SIZE	PART NO.	REV.
X	D2PH-2-04-U-130/SMT/488-PP-1TR	-
REF: S0069T	SCALE: NTS	SHEET 1 OF 1