
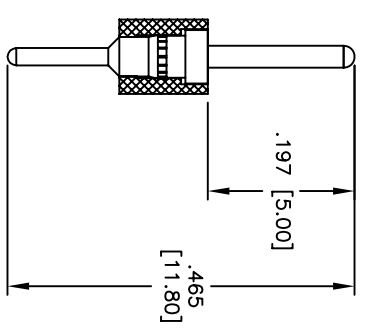
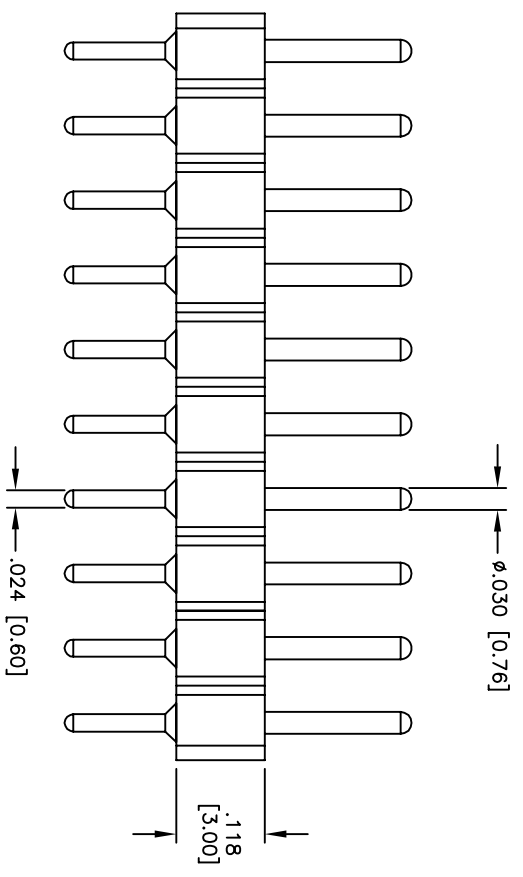


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/24/08	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

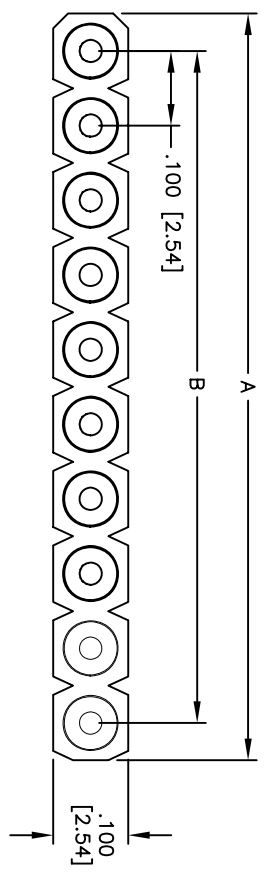

Positions: 1 thru 64  
 A = .100 [2.54] x No. of Positions per Row  
 B = .100 [2.54] x No. of Spaces per Row

**SPECIFICATIONS:**

- Material: Insulator: Nylon 6T, rated UL 94V-0
- Insulator color: Black
- Contacts: Brass
- Plating: Gold over Nickel underplate overall
- Electrical: Operating voltage: 250 VAC max
- Current rating: 3 Amp max
- Contact resistance: 30 mohms max initial
- Insulation resistance: 1,000 Mohms min
- Dielectric withstanding voltage: 500 VAC for 1 minute
- Temperature Rating: Operating temperature: -55°C to +125°C
- Environmental: Lead free, RoHS compliant
- Recommended soldering temp: 260°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	6/24/08
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SCREW MACHINE TERMINAL STRIP SINGLE ROW  
 STRAIGHT, .100" SPACING, GOLD

SIZE	PART NO.	REV.
X	MCT-1-XX-1-G-HT	-
REF:	SCALE: NTS	SHEET 1 OF 1