
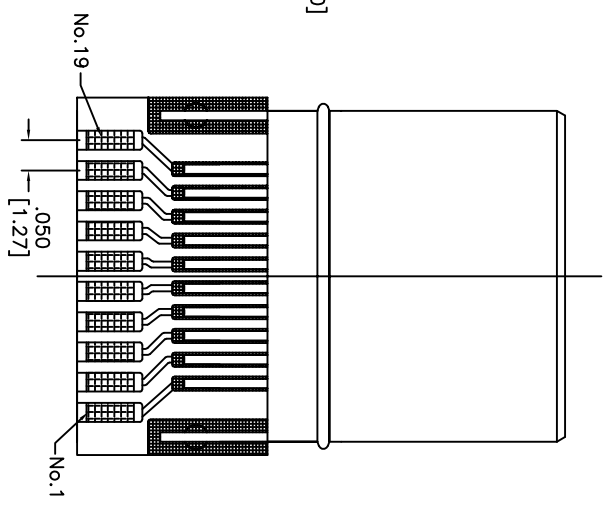
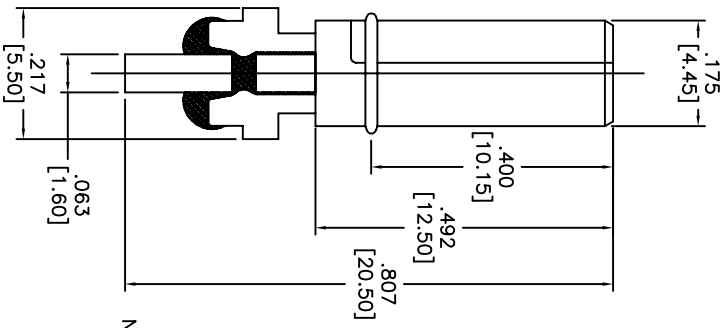
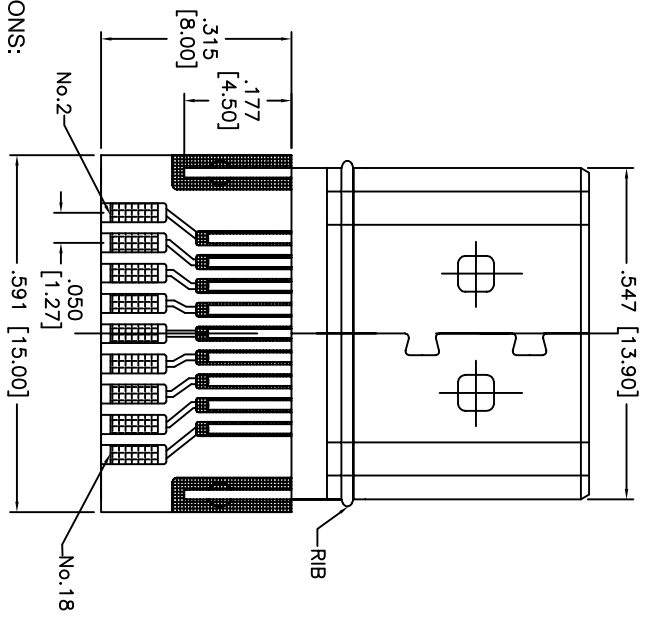


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/15/10	

APPROVED: _____
 DATE: _____ TITLE: _____

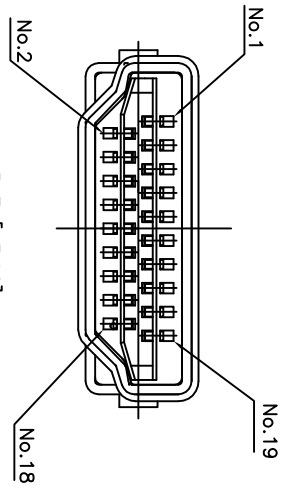

SPECIFICATIONS:

Material:
 Insulator: Thermoplastic, UL 94V-0
 Insulator color: Black
 Contact: Copper Alloy, Gold over Nickel plated.
 Shell: Copper Alloy

Electrical:
 Contact current rating: 0.5A MIN.

Voltage rating: 40V AC(rms)
 Withstanding voltage: 500 VAC for 1minute.
 Insulation resistance: 100 Megaohms Min.

Contact resistance: 30 milliohms Max.
Operating temperature: -25°C to +85°C

Environmental:
 Lead free, RoHS Compliant
 Recommended soldering temp: 235°C for 5 seconds.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **HDMI MALE CONNECTOR, SOLDER TYPE**
 OVER MOLDING TYPE

SIZE: X PART NO.: HDMI-PLUG-OM1

REF: S00708T SCALE: NTS SHEET 1 OF 1