

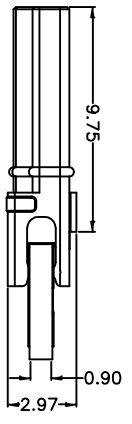
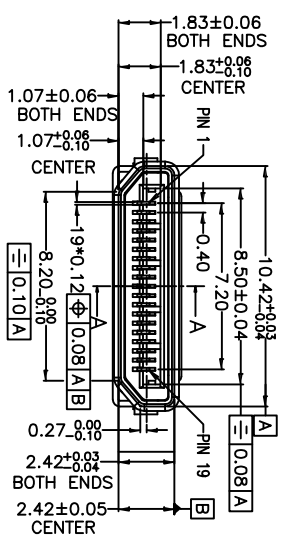
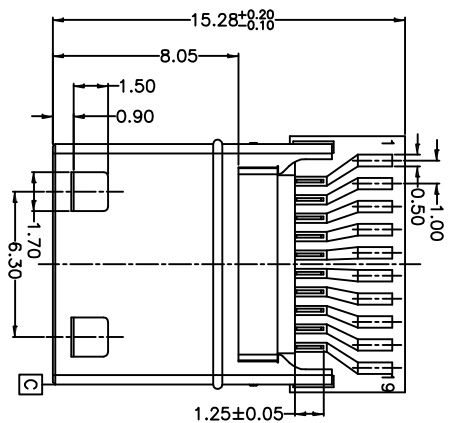


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/07/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

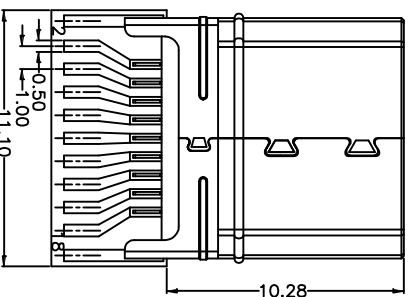

SECTION A-A

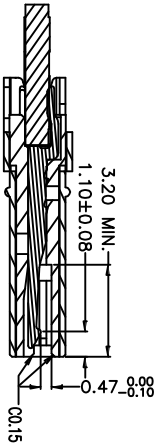

**SPECIFICATIONS:**

- Material: HI-temp thermoplastic, UL 94V-0
- Housing color: Black
- Contact: Copper Alloy
- Shield: Copper Alloy, Nickel plated
- Plating: Gold flash over Nickel underplate on contact area, Tin over Copper underplate on tails.
- Electrical: Voltage rating: 40V, Current rating: 0.5A, Dielectric strength: 300VAC for 1 minute min., Insulation resistance: 100 Megohm min., Contact resistance: 10 mohms max.
- Environmental: Lead free, RoHS Compliant
- Recommended soldering temp: 260°C for 5 seconds.

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

MINI HDMI C TYPE, 19P, PLUG

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS		TOLERANCES EXCEPT AS NOTED	
.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS		DATE	
DRAWN	DY	6/07/10	
CHECKED			
APPROVED			
SIZE	PART NO.	TITLE	
X	HDMI-PLUG-OM2	MINI HDMI C TYPE, 19P, PLUG	
REF:	S00015C	SCALE:	NTS
REV.		SHEET 1 OF 1	

