



High Quality Power Cord


UL Certificated




RoHS
Compliant

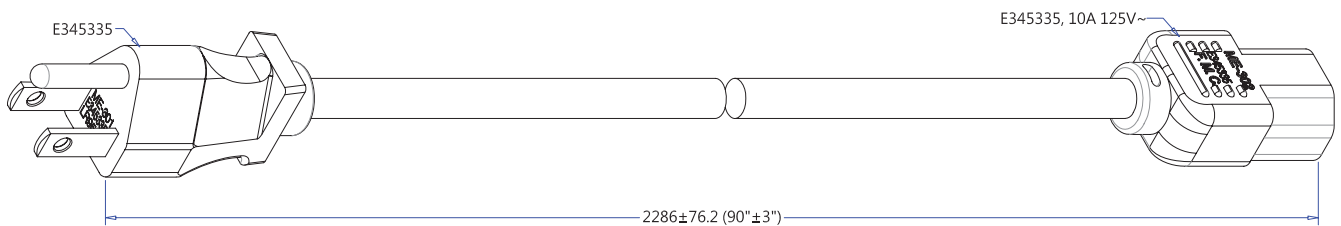

ME-301 (NEMA 5-15P)
(Dimensions of Plug Face)

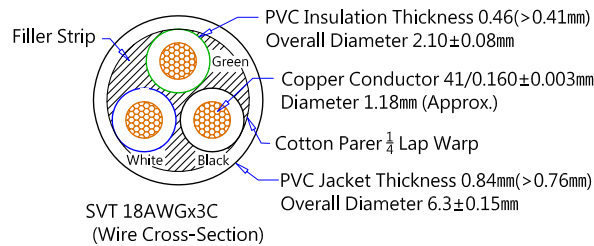

SVT 18AWGx3C
(Wire Cross-Section)



ME-302 (IEC 60320, C13, 10A 125V~)
(Dimensions of Connector Face)

Dimensions : Millimetres

Plug Component		
Colour	Component	Qty
35P (Black)	ME-301 (Nema 5-15P)	1
Nickel-plated	4.75 GEM 98475ABS-1 (#14-#18) (Earth Pins Terminal)	1
Nickel-plated	6.3×15 (#16-18) GEM 98675BBS-1 (Solid Blades)	2
Black	301-1 (5-15P Inner Body)	1

Dimension		
Strip	ROJ	Colour
6 +1/-0	22 ±2	Black (L)
6 +1/-0	22 ±2	White (N)
6 +1/-0	22 ±2	Green (E)

Wire Styles

SVT18AWGx3C

60°C Black

Length : 2,286mm ±76.2mm
90" ±3"

Connector Component		
Instruction	Qty.	Colour
ME-302 (IEC 60320, C13, 10A, 125V)	1	35p (Black)
2.0 × 4.0 GEM 98740BS-0 (#16-18) Receptacle Terminal	3	Brass-Natural
GA005-5 (2.0 × 4.0 Serial Housing)	1	Off-White

Dimensions		
ROJ	Strip	Colour
16±1	5 +1/-0	Black (L)
16±1	5 +1/-0	White (N)
16±1	5 +1/-0	Green (E)

Dimensions : Millimetres

www.element14.com
www.farnell.com
www.newark.com

