


DASH NO. M CODE MADE FROM

GSD

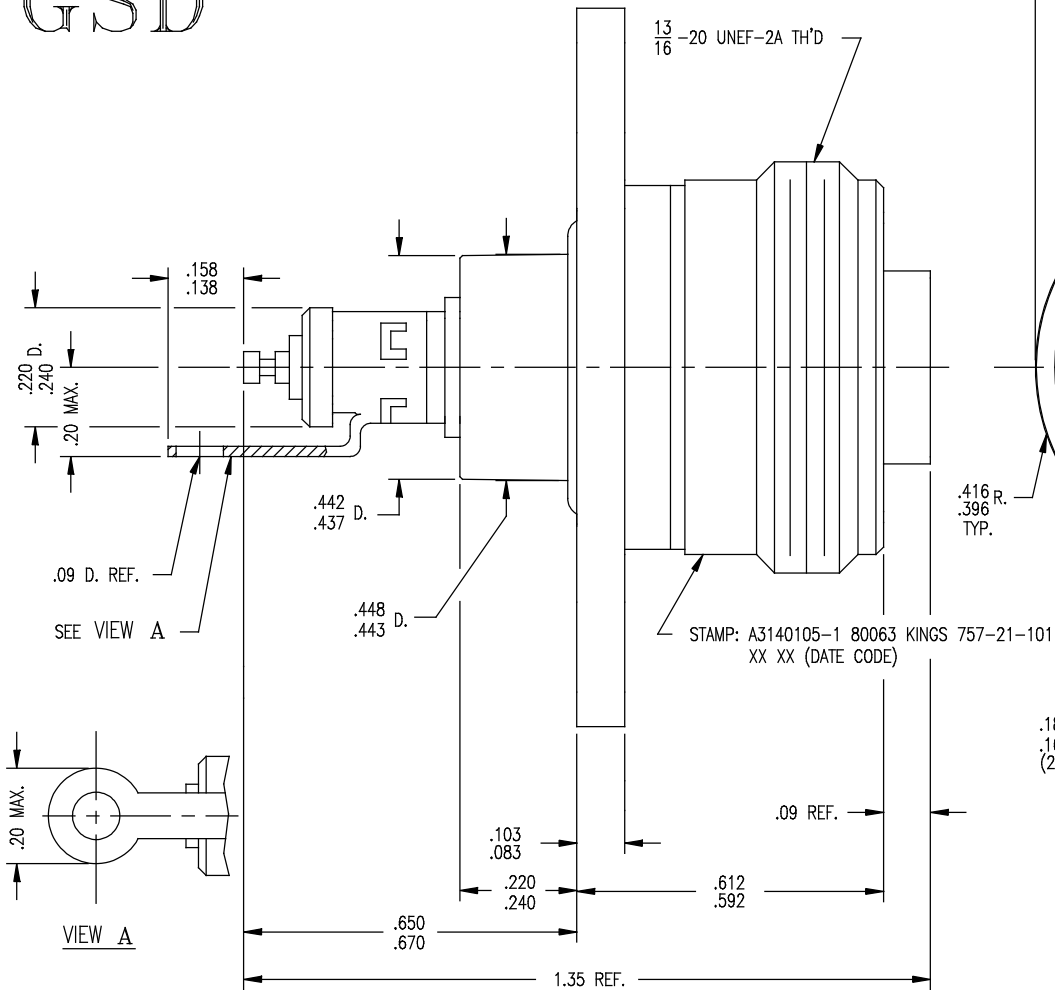

STAMP: A3140105-1 80063 KINGS 757-21-101
XX XX (DATE CODE)

- NOTES:
- CONNECTOR MUST BE CAPABLE OF WITHSTANDING A 30 PSI PRESSURE TEST, IN BOTH MATED & UNMATED POSITIONS OF INTERNAL PARTS.
 - CONTINUITY BETWEEN CONTACT AND SOLDER LUG MUST BE BROKEN WHEN A 1.5 LB. ±.5 LB. FORCE IS APPLIED TO THE FRONT OF INSULATOR. WHEN FORCE IS REMOVED CONTINUITY MUST RESUME INSTANTANEOUSLY.

- MATES WITH K-3949 & K-3993.
- MATERIALS:
INSULATORS: TEFLON, ASTM-D-1457
O-RINGS: SYNTHETIC RUBBER, PER MIL-P-25732

- MATERIALS (COND.)
COIL SPRING: STAINLESS STEEL, 316 FM
PLASTIC CAP: VINYL, COLOR: RED
SOLDER LUG }
CONTACT F } BER. COPPER, ASTM-B-196
FLANGE }
RETAINING RING }
ALL OTHER METAL PARTS: BRASS, QQ-B-626
- FINISHES:
RETAINING RING }
BODY } CADMIUM PATE, QQ-P-416
COIL SPRING: PASSIVATION TREATMENT, QQ-P-35
ALL OTHER METAL PARTS: SILVER PLATE, QQ-S-365
- ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
WORKING VOLTAGE: 500 VRMS
FREQUENCY RANGE: DC TO 4 GHz.

757-21-101

REVISIONS

ISSUE	CHANGES
4	CN 32467 A REDRAWN JCA 08/24/90

GSD

SCALE 4:1	
APPROX SURFACE AREA	
WAS: E-15603E	
USED ON	
REF: ARMY DWG. A3140105 REV. A	
BNC BULKHEAD RECEPTACLE	
DRAWN JCA	DATE 08/24/90
DESIGN JT	DATE 08/27/90
APPR.	DATE
 ELECTRONICS CO., INC. TUCKAHOE, NEW YORK 10707	

757-21-101