

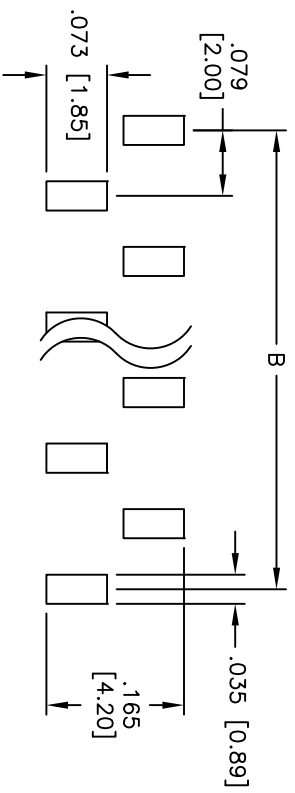
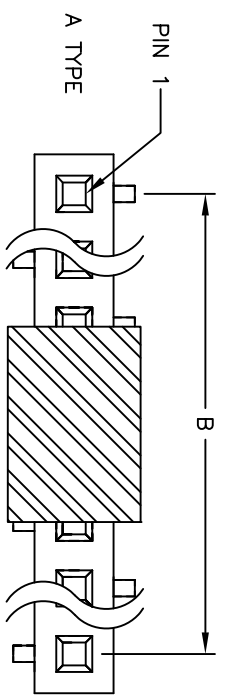


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/07/11	

APPROVED: _____
 DATE: _____ TITLE: _____

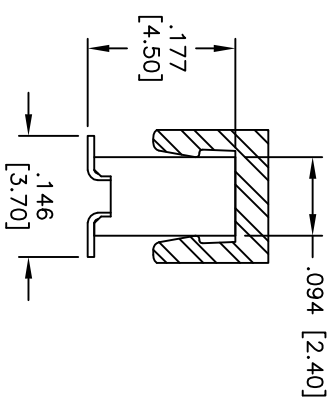

Recommended PCB Layout

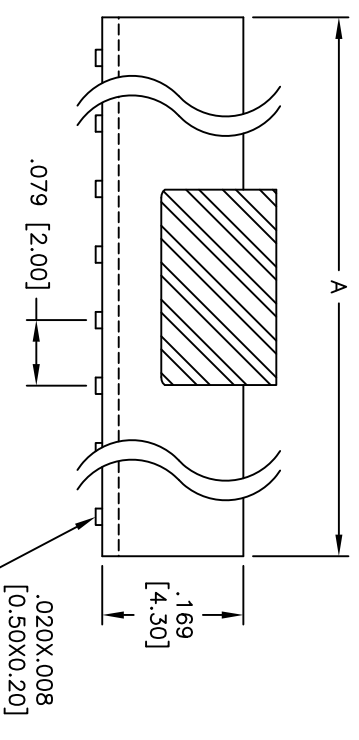

PCAKAGED ON TAPE & REEL

A = .079 [2.00] x No. of Positions
 B = .079 [2.00] x No. of Spaces

SPECIFICATIONS:

Material:

Insulator: HI-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze

Plating:

Tin over Copper underplate overall.

Electrical:

Operating voltage: 150 VAC max
 Current rating: 1 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 5000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
 Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES ARE NOTED
 INCHES HOLEES

.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010

APPROVALS: _____ DATE: _____

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710
 TITLE: .079[2.00]SINGLE ROW RECEPTACLE STRIP
 .169[4.30]HEIGHT, SMT, TYPE A

DRAWN	DY	7/07/11
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	2RS1-XX-1-SMT-APP-T/R	-
REF:	SCALE: NTS	SHEET 1 OF 1