

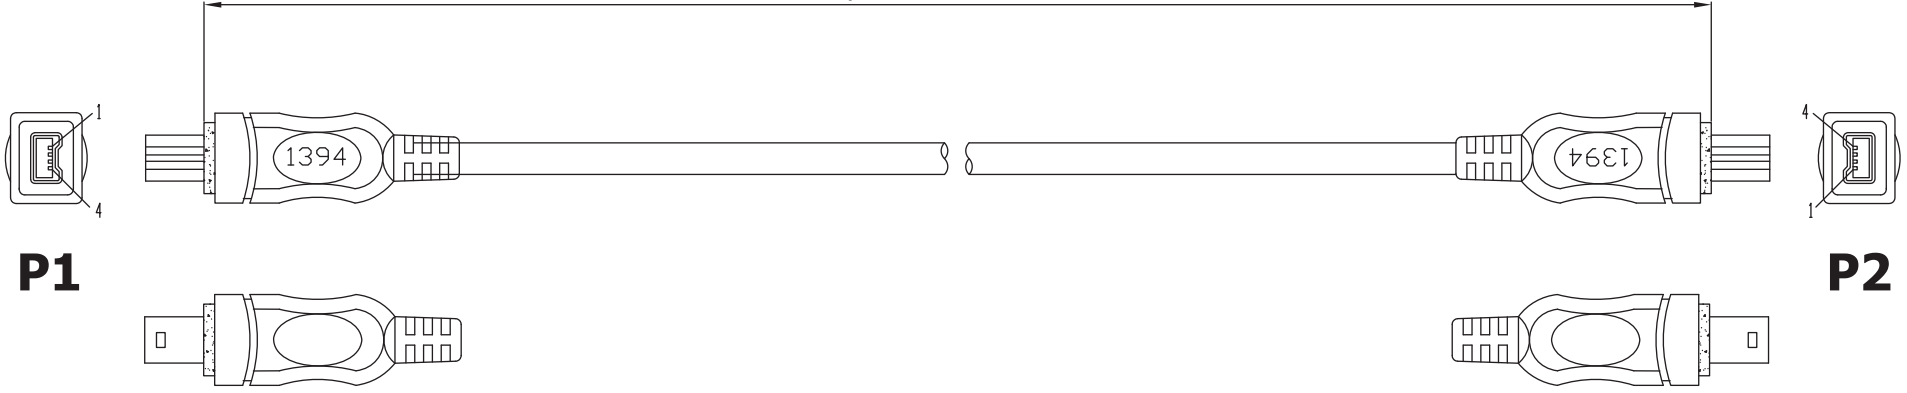


1,800MM±50MM

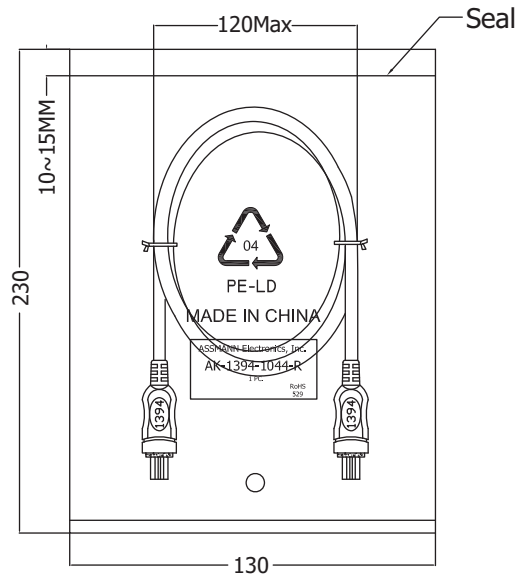

**Pin Assignment**

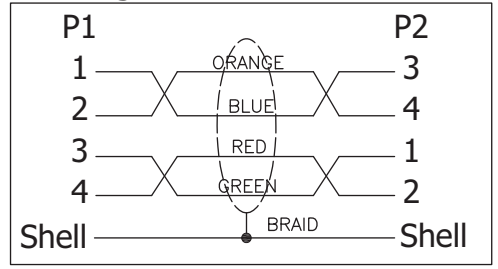

**Material:**

- Cable: UL20276 [30AWG/1P+AB)\*2C+AL/MY+B
  - OD ø4.8MM, stranded
  - Jacket: Black
- P1 & P2 Connectors: IEEE 1394 4P Male
  - G/F Insulation Black
  - Shield nickel plated

**Electrical:**

- Outer jacket: Black 40P PVC
- Tube: Heat shrink, black, OD 1.5\*10MM
- Temperature 80°C
- Rated Voltage: 30V
- Construction type A
- IEEE Compliant

Unit: MM



Scale	1:1							Name
TOLERANCE								Chappell
X.X	±0.40						Drawn	10.24.11
X.XX	±0.25						Approved	
X.XXX	±0.15							
Angle	±3°							
				Modification	Date	Name		

Item No.	<b>AK-1394-1844-R</b>	
Title	IEEE 1394 Cable - 4 Pin Male <=> 4 Pin Male 1.8 Meters	
Drawing No.		rev00
Replace		Sheet