

**NICHIA CORPORATION**

## **SPECIFICATIONS FOR WHITE STANDARD LED**

### **NLPW01S03A**

- LED reference standard with temperature control unit  
for luminous intensity calibration

# SPECIFICATIONS

## (1) Absolute Maximum Ratings

Item	Symbol	Absolute Maximum Rating	Unit
Forward Current	$I_F$	30	mA
Allowable Reverse Current	$I_R$	50	mA
Operating Temperature	$T_{opr}$	20~30	°C
Storage Temperature	$T_{stg}$	0~40	°C
Platinum Resistance Temperature Device (RTD) Current	$I_{pt}$	2	mA
Peltier Device Current	$I_{pel}$	-1~1	A
Peltier Device Voltage	$V_{pel}$	-3.2~3.2	V

\* Absolute maximum ratings at  $T_A=25^\circ\text{C}$ .

## (2) Initial Electrical/Optical Characteristics

Item	Symbol	Condition	Typ	Unit
Forward Voltage	$V_F$	$T_{pt}=30^\circ\text{C}, I_F=20\text{mA}$	2.90	V
Luminous Intensity	$I_v$	$T_{pt}=30^\circ\text{C}, I_F=20\text{mA}$	1.58	cd
Color Rendering Index	$R_a$	$T_{pt}=30^\circ\text{C}, I_F=20\text{mA}$	80	-
Chromaticity Coordinate	x	$T_{pt}=30^\circ\text{C}, I_F=20\text{mA}$	0.310	-
	y	$T_{pt}=30^\circ\text{C}, I_F=20\text{mA}$	0.320	-
Directivity	Luminous Intensity	$I_v(\varphi, \theta)$	$T_{pt}=30^\circ\text{C}, I_F=20\text{mA}$	within $\pm 5\%$ to mechanical axis
	Chromaticity Coordinate	$x, y(\varphi, \theta)$	$T_{pt}=30^\circ\text{C}, I_F=20\text{mA}$	within $\pm 0.003$ to mechanical axis

\* Characteristics at  $T_A=25^\circ\text{C}$ .

\* Luminous Intensity value as per CIE 127:2007 standard.

\* Chromaticity Coordinates as per CIE 1931 Chromaticity Chart.

\* Platinum RTD temperature ( $T_{pt}$ ) must be controlled between  $30^\circ\text{C}$  and  $35^\circ\text{C}$ .

\* The LED incorporated into the socket was characterized.

\* The product seasoned for 200 hours at  $T_A=25^\circ\text{C}, I_F=20\text{mA}$  was characterized.

## (3) Lumen Maintenance


\* Guaranteed maximum fluctuation of luminous intensity is  $\pm 3\%$  of the initial value in a shorter time

between the time up to 100 hours of continuous operation and 1 year at  $T_A=25^\circ\text{C}, T_{pt}=30^\circ\text{C}(\pm 0.03^\circ\text{C})$ , and  $I_F=20\text{mA}(\pm 0.1\%)$ .

# DIRECTIONS FOR USE

## (1) Auxiliary Equipment and System Requirements

- The following figure shows how the Luminous Flux Standard LED is connected.

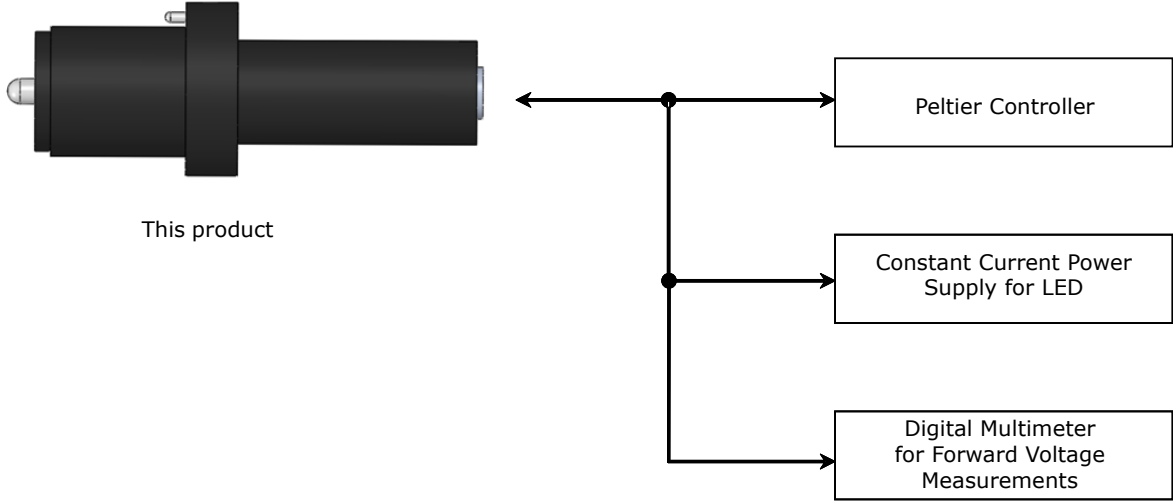

Recommended specifications for the peripheral equipment


Peltier Controller	PID Controller Temperature measurement accuracy of $\pm 0.03^{\circ}\text{C}$ .
Constant Current Power Supply for LED	Drive current accuracy: $\leq 0.1\%$ of the set current
Digital Multimeter for Forward Voltage Measurements	Input impedance: $\geq 1\ \text{G}\Omega$

## (2) Installation

- The following figure shows how the product should be held by a holder.


Example 1:

(Held by the part with 25 mm diameter)

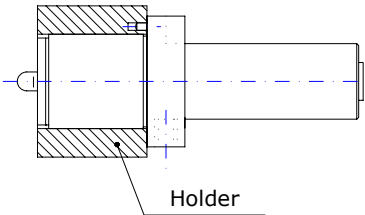

Example 2:

(Held by the part with 20 mm diameter)

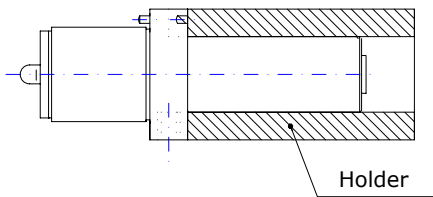


## (3) Measurement

- The product should be measured when luminous intensity has stabilized after the start of temperature control and constant current drive. Typically, this product will be stable and ready to be used for calibration within 1 to 3 minutes. Please refer to "STABILITY" on the following page for the characteristics during the first 5 minutes after the LED starts emission.

# OUTLINE DIMENSIONS


NLPx01S03A  
管理番号 No. STS-DA5-0029

(単位 Unit: mm, 公差 Tolerance: ±0.2)

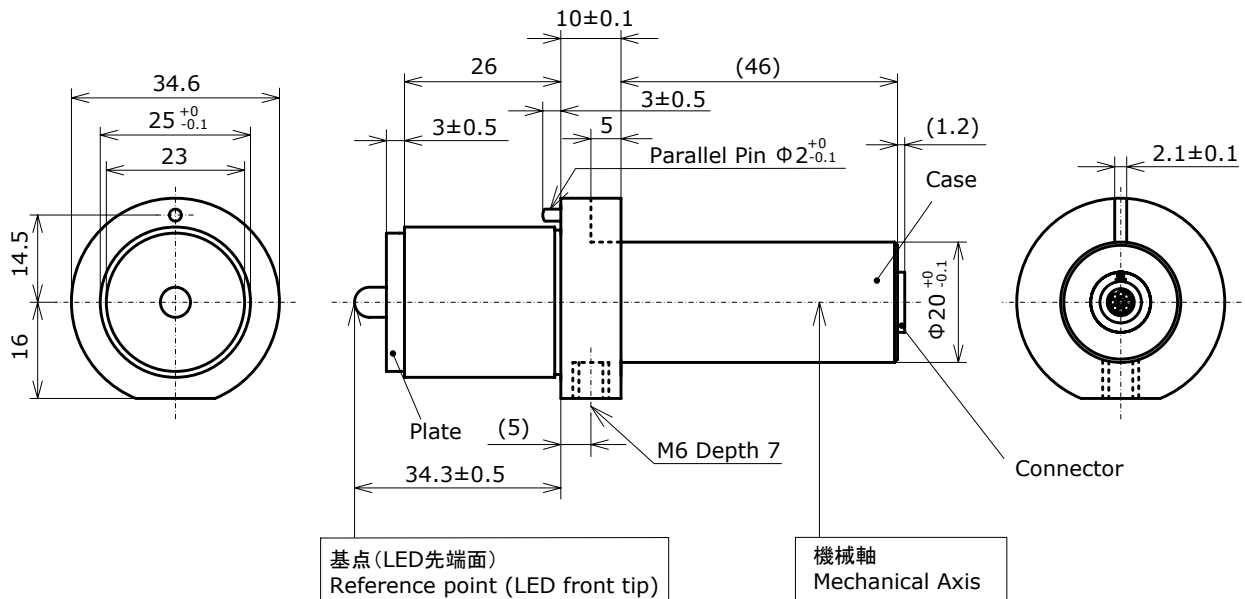

項目 Item	内容 Description	数量 Quantity
コネクタ Connector	Part No.: EGJ.0B.309.CLA (from LEMO JAPAN Ltd.)	1
ケース Case	材質: アルミニウム Material: Aluminum	1
プレート Plate	材質: 樹脂 Material: POM	1

型番 NICHIA Part Number      シリアル番号 Serial Number

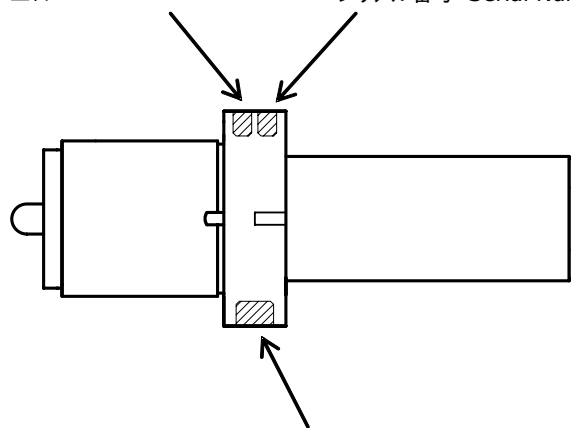

ロゴマーク NICHIA LED Mark

型番 NICHIA Part Number  
NLP\*01S03A  
\* - 発光色 (例 W: 白色)  
\* - Color (Example W: White)

シリアル番号 Serial Number  
XXXXX

ロゴマーク NICHIA LED Mark





WIRING CONNECTION

NLPx01S03x  
管理番号 No. STS-DA5-0030




矢印方向から見たコネクタ図は以下を参照して下さい。  
Refer to the following illustration for the connector pin numbering  
(viewed from direction of the arrow).

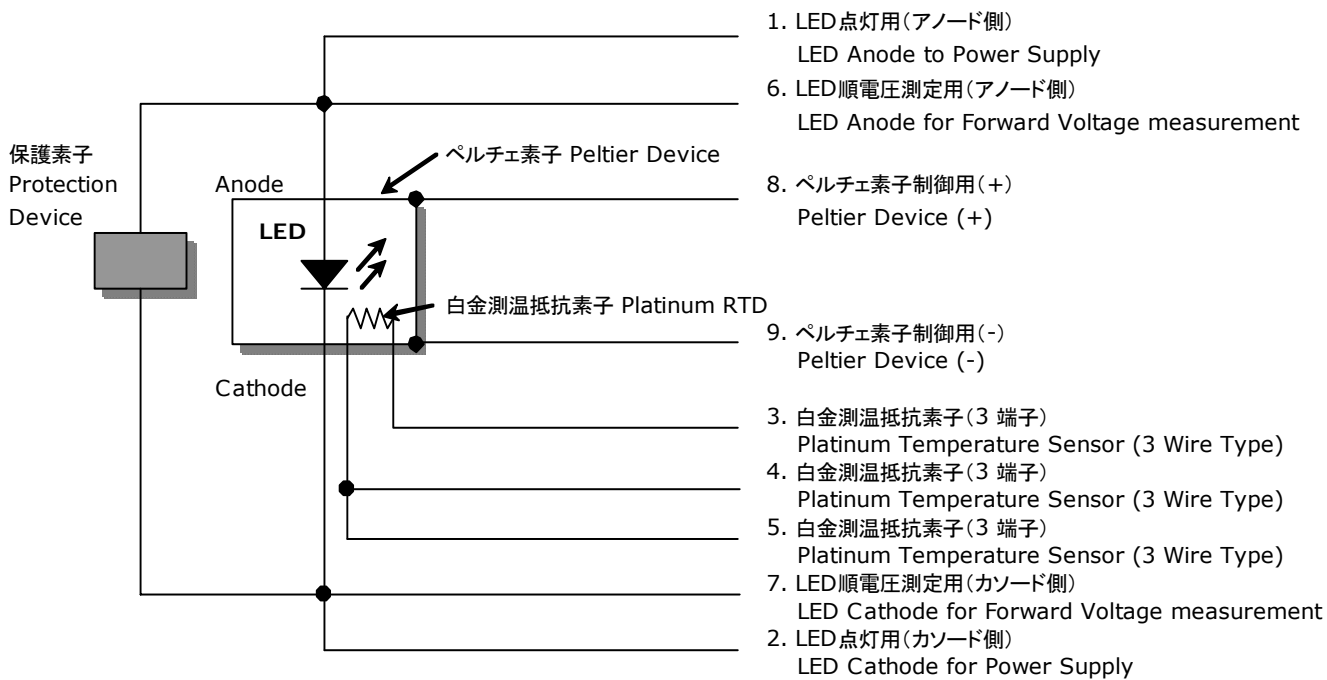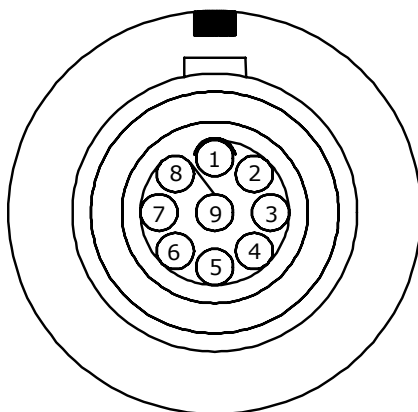

## PACKAGING

NLPx01S03x  
管理番号 No. STS-DA5-0031

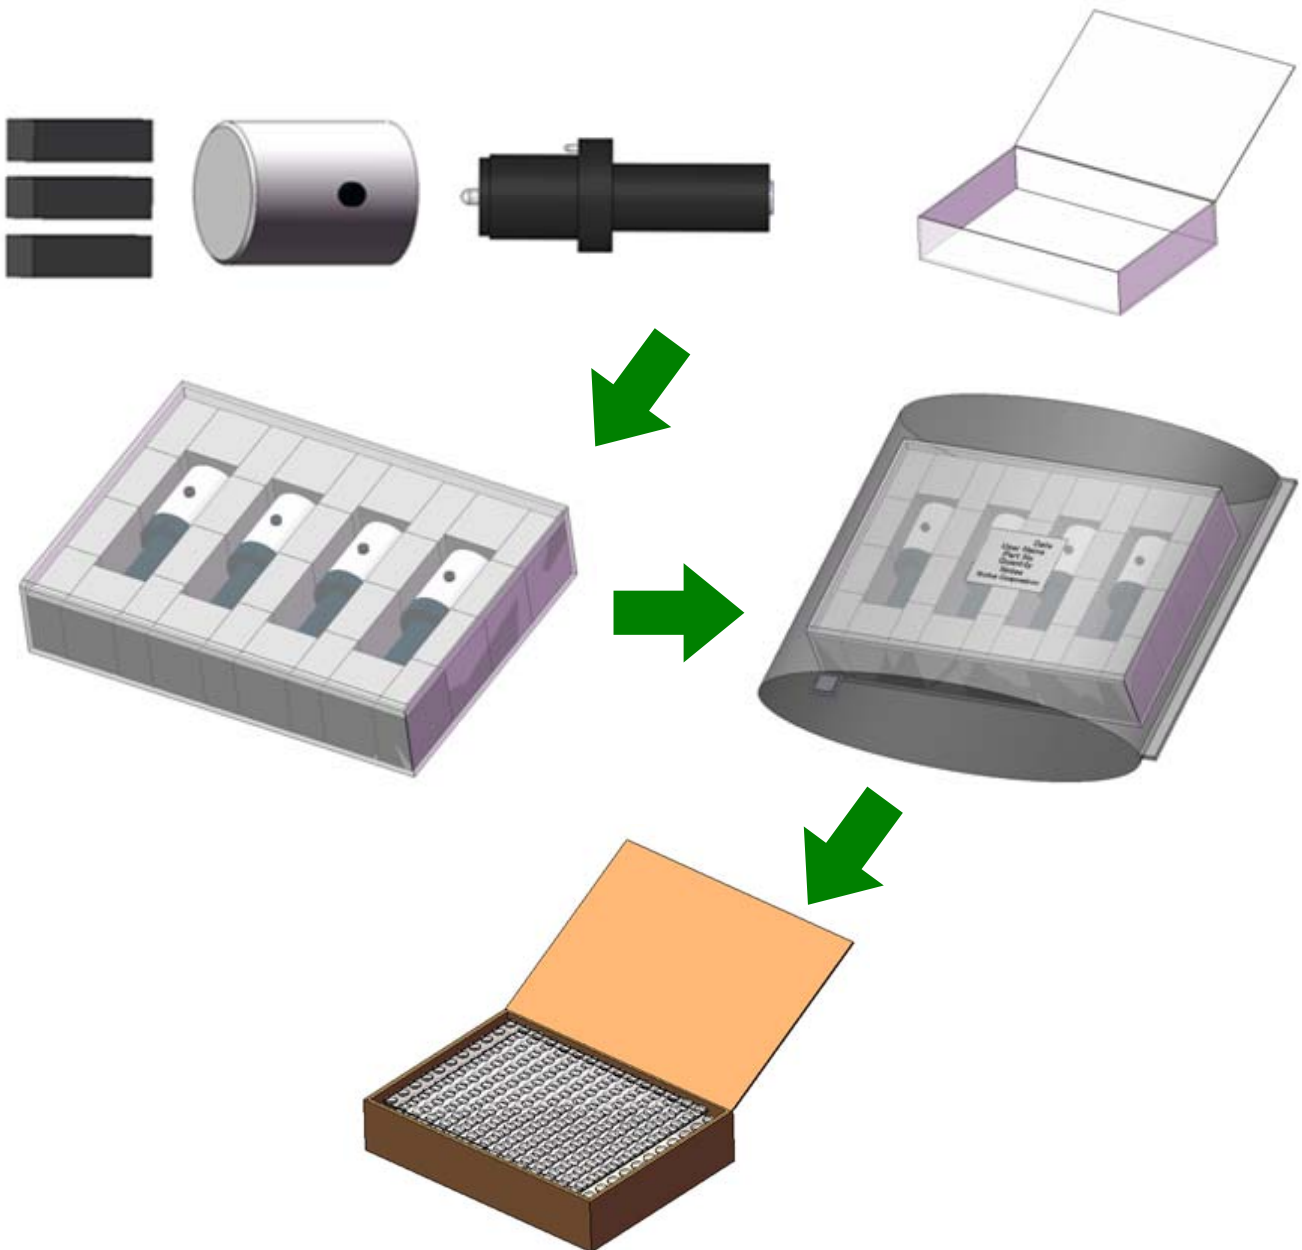


- \* 製品、キャップ、緩衝ウレタンをプラスチックケースに入れます。  
The capped products are placed in a urethane-filled plastic case.
- \* プラスチックケースをシリカゲルとともにアルミ防湿袋に入れ、熱シールにより封をします。  
The plastic case and desiccant (silica gel) are placed in a moisture-proof foil bag and then heat-sealed.
- \* 製品を入れたアルミ防湿袋をプチシートでくるみ、段ボール箱に梱包します。  
The moisture proof foil bag is covered with bubble-wrap and the bubble wrap is placed in a cardboard box.
- \* 段ボール箱内に空きスペースがなくなるまでプチシートを重ね、最後に段ボール箱のふたをガムテープで止めます。  
Extra bubble-wrap is filled in the empty space of the box. Then the box is sealed with packing tape.
- \* プラスチックケースには出荷先、型名、数量、備考を明記したラベルを貼りつけます。  
A label specifying "Customer Name, NICHIA Part No., Quantity and Notes" is attached to the plastic case.

# OPTICAL CHARACTERISTICS


\* 本特性は参考です。  
All characteristics shown are for reference only and are not guaranteed.

NLPW01S03A  
管理番号 No. STS-DA5-0032


## 発光スペクトル Spectrum

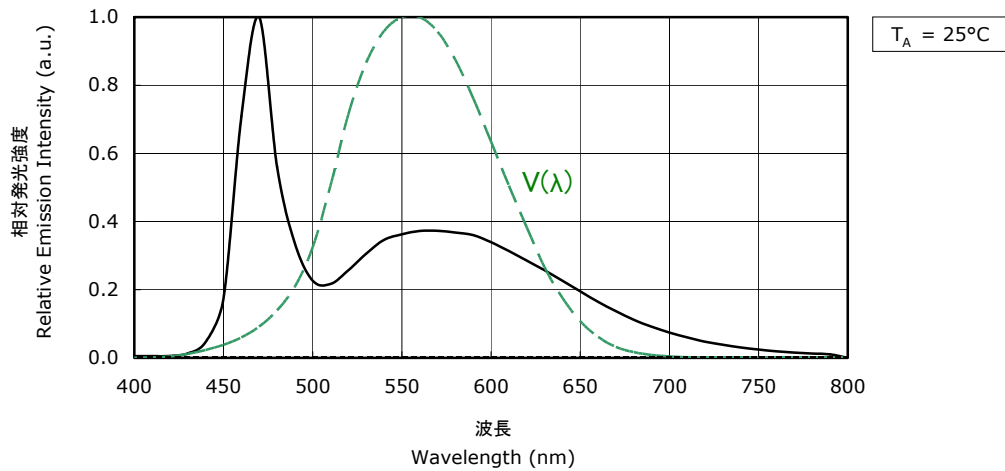

## 指向特性 Directivity

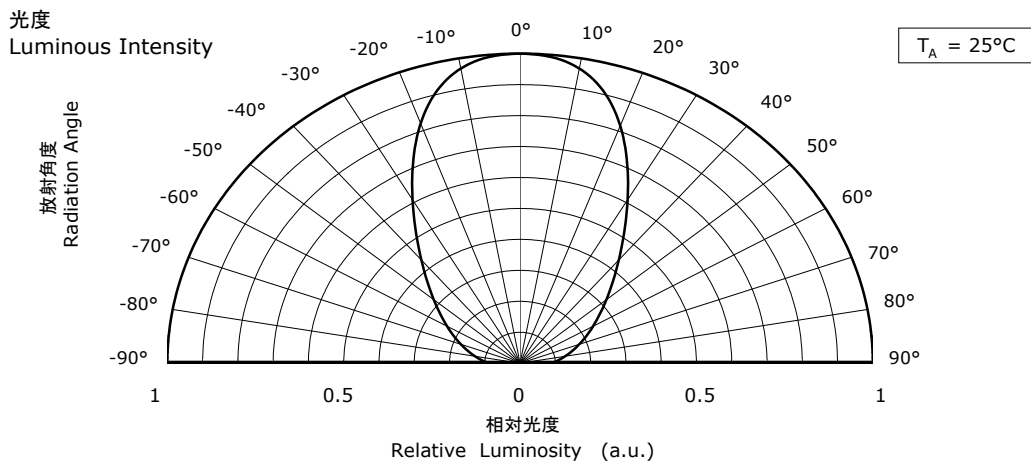

## 色度 Chromaticity Coordinate

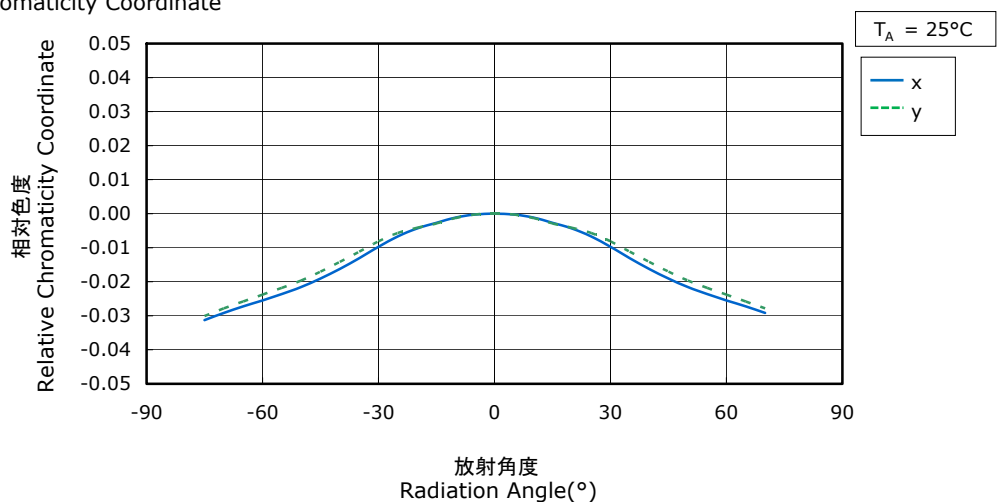

\* 標準LEDに取り付けられた白金測温抵抗素子の温度が $30^\circ\text{C}$ なるように温度コントロールしたときの特性です( $I_F = 20\text{ mA}$ )。 These characteristics are measured at  $I_F = 20\text{ mA}$  and  $T_{dt} = 30^\circ\text{C}$ .

\* ペルチェコントローラの温度制御安定度は $\pm 0.03^\circ\text{C}$ です(メーカー仕様値)。 The Stability of Peltier Controller is  $\pm 0.03^\circ\text{C}$  (data from manufacturer specification).


# OPTICAL CHARACTERISTICS(Enlarged)

\* 本特性は参考です。  
All characteristics shown are for reference only and are not guaranteed.


NLPW01S03A  
管理番号 No. STS-DA5-0033

## 指向特性 Directivity

光度  
Luminous Intensity

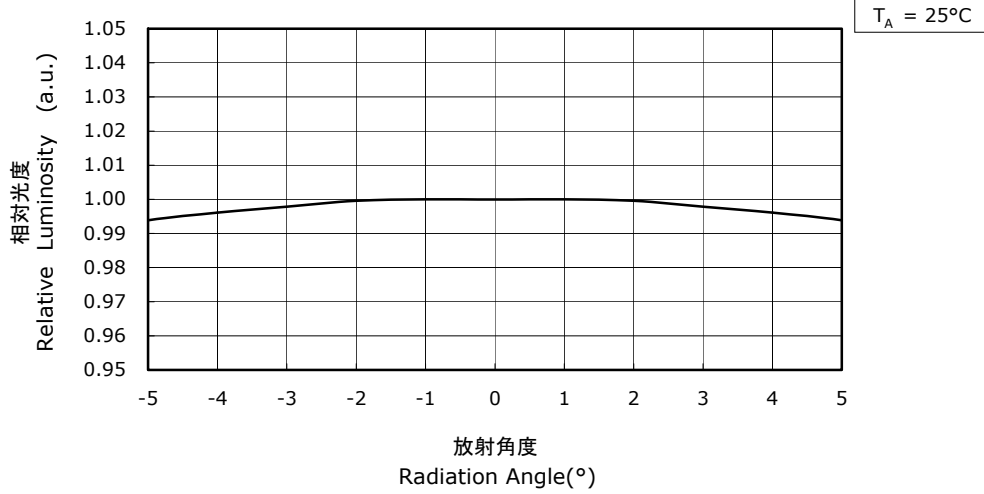

色度  
Chromaticity Coordinate

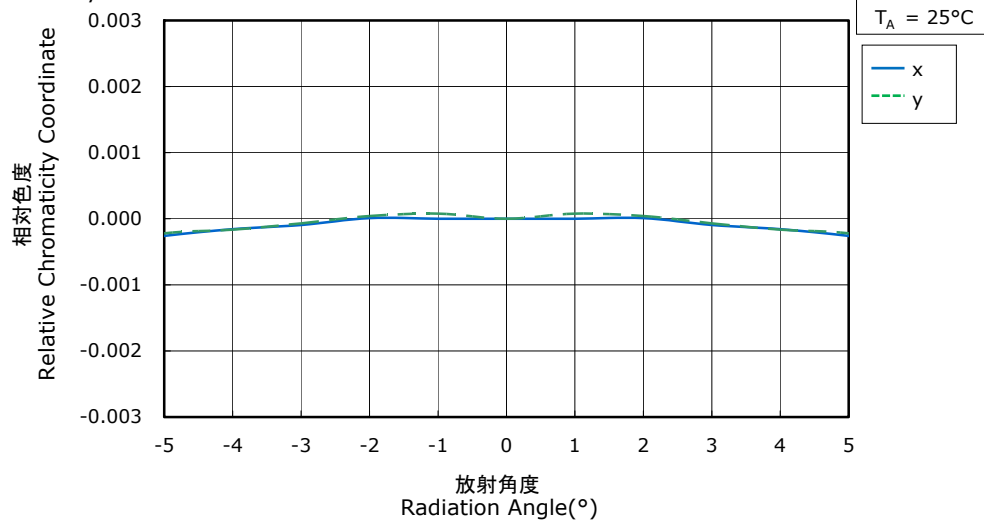

\* 標準LEDに取り付けられた白金測温抵抗素子の温度が30°Cなるように温度コントロールしたときの特性です( $I_F = 20\text{ mA}$ )。  
These characteristics are measured at  $I_F = 20\text{ mA}$  and  $T_{nt} = 30^\circ\text{C}$ .  
\* ペルチェコントローラーの温度制御安定度は $\pm 0.03^\circ\text{C}$ です(メーカー仕様値)。  
The Stability of Peltier Controller is  $\pm 0.03^\circ\text{C}$  (data from manufacturer specification).




# STABILITY


\* 本特性は参考です。  
All characteristics shown are for reference only and are not guaranteed.

NLPW01S03A  
管理番号 No. STS-DA5-0034


点灯時間 - 相对順電圧特性  
Relative Forward Voltage  
Over Time

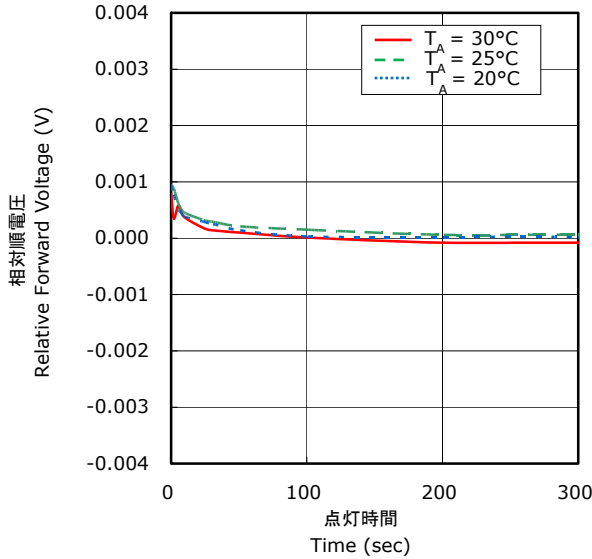


点灯時間 - 相对光度  
Relative Luminous Intensity  
Over Time

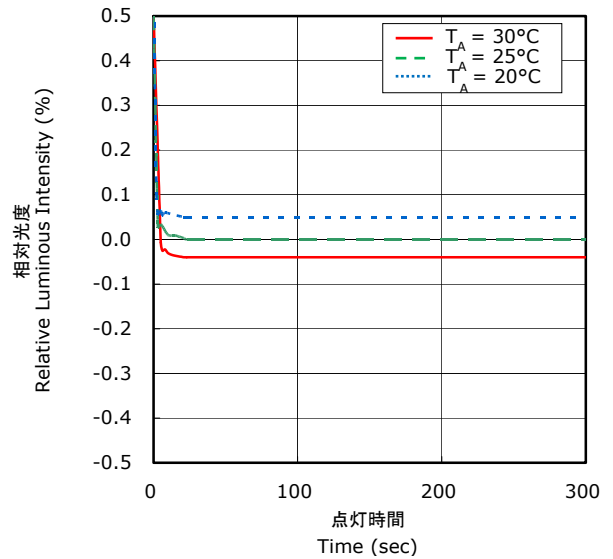

点灯時間 - 相对色度 x特性  
Relative x Coordinate  
Over Time

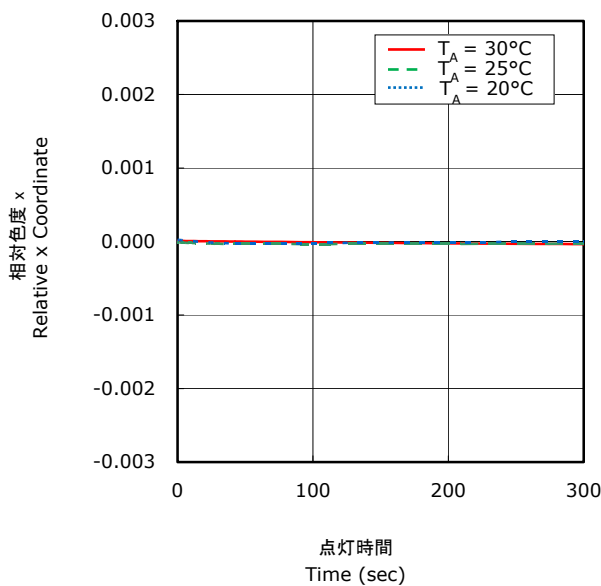

点灯時間 - 相对色度 y特性  
Relative y Coordinate  
Over Time

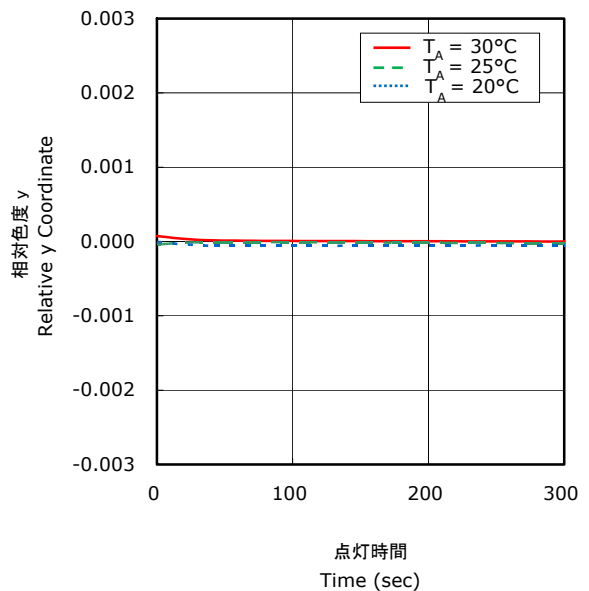

- \* 標準LEDに取り付けられた白金測温抵抗素子の温度が30°Cなるように温度コントロールしたときの特性です( $I_F = 20 \text{ mA}$ )。 These characteristics are measured at  $I_F = 20 \text{ mA}$  and  $T_{nr} = 30^\circ\text{C}$ .
- \* ペルチェコントローラーの温度制御安定度は $\pm 0.03^\circ\text{C}$ です(メーカー仕様値)。 The Stability of Peltier Controller is  $\pm 0.03^\circ\text{C}$  (data from manufacturer specification).
- \* 点灯時間-相对順電圧特性、点灯時間-相对光度特性、点灯時間-相对色度x特性、点灯時間-相对色度y特性は、 $T_A = 25^\circ\text{C}$ 、LED点灯300sec後の値を基準としています。 In the above graphs, the value at 300 seconds of the curve of  $T_A = 25^\circ\text{C}$  was set as the reference point.

## CAUTIONS

### (1) Storage

- The products should be stored in an air tight container with desiccant (silica gel) at 30°C or less and 70% RH or less.
- To avoid condensation, the products must not be stored in the areas where temperature and humidity fluctuate greatly.
- The LED incorporated in the product is silver plated. Customer is advised to store properly the products in controlled ambient as exposure to a corrosive environment might cause the plated metal parts of the product to tarnish, which might leads to adverse effects on optical characteristics.

### (2) Handling Precautions

- Do not expose the product to shock. Failure to comply might affect on its characteristics.

### (3) Electrostatic Discharge (ESD)

- The products are sensitive to static electricity or surge voltage. ESD can damage a die and its reliability.  
When handling the products, the following measures against electrostatic discharge are strongly recommended:
  - Eliminating the charge
  - Grounded wriststrap, ESD footwear, clothes, and floors
  - Grounded workstation equipment and tools
  - ESD table/shelf mat made of conductive materials
- The customer is advised to check if the LEDs are damaged by ESD when performing the characteristics inspection of the LEDs in the application. Damage can be detected with a forward voltage measurement or a light-up test at low current.
- ESD damaged LEDs may have a current flow at a low voltage or no longer illuminate at a low current.  
Failure Criteria:  $V_F < 2.0V$  at  $I_F = 0.5mA$

### (4) Eye Safety

- The International Electrical Commission (IEC) published in 2006, IEC 62471:2006 Photobiological safety of lamps and lamp systems which includes LEDs within its scope. Meanwhile LEDs were removed from the scope of the IEC 60825-1:2007 laser safety standard, the 2001 edition of which included LED sources within its scope. However, keep it mind that some countries and regions have adopted standards based on the IEC laser safety standard IEC 60825-1:2001 which includes LEDs within its scope. Following IEC 62471:2006, most of Nichia LEDs can be classified as belonging to either Exempt Group or Risk Group 1. Especially a high-power LED, that emits light containing blue wavelengths, may be in Risk Group 2. Great care should be taken when viewing directly the LED driven at high current or the LED with optical instruments, which greatly increase the hazard to your eyes.
- Viewing a flashing light may cause eye discomfort. When incorporating the LED into your product, precaution should be taken to avoid adverse effect on human body caused by the light stimulus.

### (5) Others

- This product is designed to be used for calibration. Do not use this product for any other purposes or other applications.
- The customer shall not reverse engineer by disassembling or analysis of the LEDs without having prior written consent from Nichia. When defective LEDs are found, the customer shall inform Nichia directly before disassembling or analysis.
- When a customer purchases this product, the customer and Nichia shall agree the official specification of the supplied products.
- Specifications and appearance subject to change for improvement without notice.