

### FEATURES

#### Resistor Programmable Voltage or Current Output

Voltage: +1V dc to +15V dc @ 125mA max

Current: 100 $\mu$ A to 10mA ( $V_{COMPL} = +10V$ )

#### Dual Fixed Output: $\pm 15V$ dc @ $\pm 65mA$ max

Excellent Regulation: Line  $\pm 0.01\%$  max; Load  $\pm 0.02\%$  max

Low Drift: 0.006%/ $^{\circ}C$  max (2B35K)


No Derating Over  $-25^{\circ}C$  to  $+71^{\circ}C$  Operating Range

### APPLICATIONS

Measurement and Control Instruments and Systems

Excitation Source For:

Strain Gages, Pressure Transducers, Load Cells, Torque Transducers, RTD's

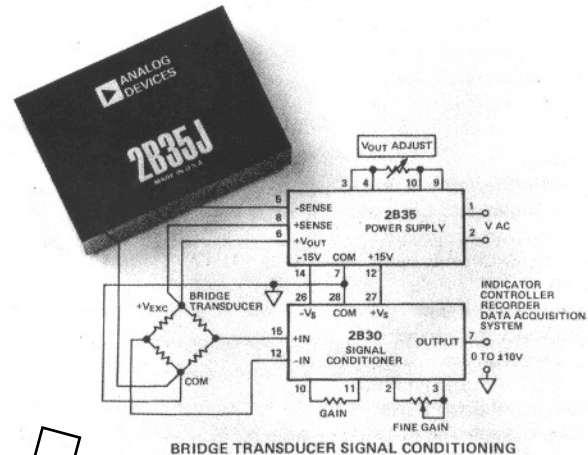

BRIDGE TRANSDUCER SIGNAL CONDITIONING

### OPERATION

Figure 1 illustrates operation of the 2B35K providing an adjustable voltage output and dual 15V dc outputs. The resistor programmable output ( $+V_{OUT}$ ) is set between +1V to +15V by the  $R_{TRIM}$ .  $R_{TRIM}$  may be determined by using either the table shown in Figure 1 or the graph shown in Figure 2. For example, to provide an adjustable range from +1V to +6V,  $R_{TRIM}$  should be a 5k $\Omega$  pot.

The remote sensing inputs (pins 5 and 8) are connected at the transducer (load) to the voltage output (SENSE HIGH to  $+V_{OUT}$  and SENSE LOW to COMMON).

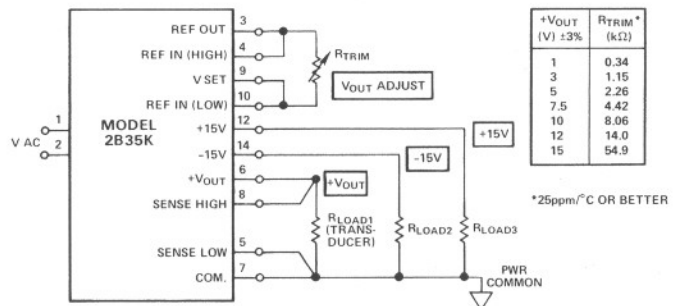


Figure 1. Model 2B35K Connection Diagram for Dual 15V dc and Adjustable +1V to +15V Output

For optional input voltage ranges, see note 1, page 2.

### GENERAL DESCRIPTION

The 2B35 is a triple output modular power supply designed to provide regulated excitation to a wide variety of transducers as well as  $\pm 15V$  power for amplifiers and other analog circuits of an instrumentation system. The single-resistor programmable transducer excitation output may be operated in two modes: constant voltage, providing a +1V to +15V output or a constant current, adjustable from 100 $\mu$ A to 10mA.

The programmable output in the voltage mode features current rating of 0 to 125mA, suitable to excite four 350 $\Omega$  transducers at 10V. Current limiting protects the output against accidental overload and remote sensing corrects for the transducer cable resistance variations. In the constant current mode, externally set 100 $\mu$ A to 10mA output offers a 0 to +10V compliance voltage range. The  $\pm 15V$  outputs feature 0.5% tracking accuracy and current rating of 0 to  $\pm 65mA$  max.

Two accuracy selections are available offering guaranteed low temperature coefficient; 2B35K: 0.006%/ $^{\circ}C$  max and 2B35J: 0.05%/ $^{\circ}C$  max. Line and load regulation are also guaranteed; 2B35K: 0.01% and 0.02%, and 2B35J: 0.08% and 0.1%, max, respectively.

### APPLICATIONS

The 2B35 is designed for ac powered signal conditioning instrumentation applications used for data acquisition, control, indication or recording. This compact module may be applied as a power source for the model 2B30 strain gage transducer/RTD signal conditioner in a high accuracy transducer interface application. Some typical applications involve strain gages for stress/strain measurements, pressure transducers, load cells, torque transducers and RTD's.

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices.

P.O. Box 280; Norwood, Massachusetts 02062 U.S.A.  
 Tel: 617/329-4700 Twx: 710/394-6577  
 Telex: 924491 Cables: ANALOG NORWOODMASS

