


Electrical Test:

- 1. 100% short, open, miswire test
- 2. Contact Resistance: 2Ω Max.
- 3. Insulation Resistance: 5Ω Min.

⑤	OUTER MOLD: PVC 45P Color: Black
④	INNER MOLD: PE COLOR TRANSPARENT
③	CONNECTOR: USB A JACK SOLDER TYPE INSULATION: WHITE.
②	CONNECTOR: USB A PLUG SOLDER TYPE INSULATION: WHITE.
①	CABLE: UL2725 28AWG*1P+24AWG*2C+A.D+B65% O.D:4.7MM PVC JACKET COLOR BEIGE(CS-B02)
NO.	DESCRIPTION

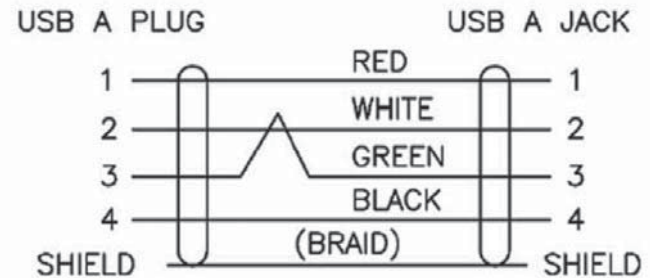

Scale	1:1							Name
TOLERANCE								Item No.
X.X	±0.40					Drawn	01.04.12	Chappell
X.XX	±0.25					Approved		
X.XXX	±0.15							Title
Angle	±3°							USB Extension Cable Version 1.1, USB A Male to USB A Female
								Drawing No.
								Replace
								Sheet
		Modification	Date	Name				



rev00