MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH – BASIC

CATALOG LISTING
V7–3E17D8
CW–B8419

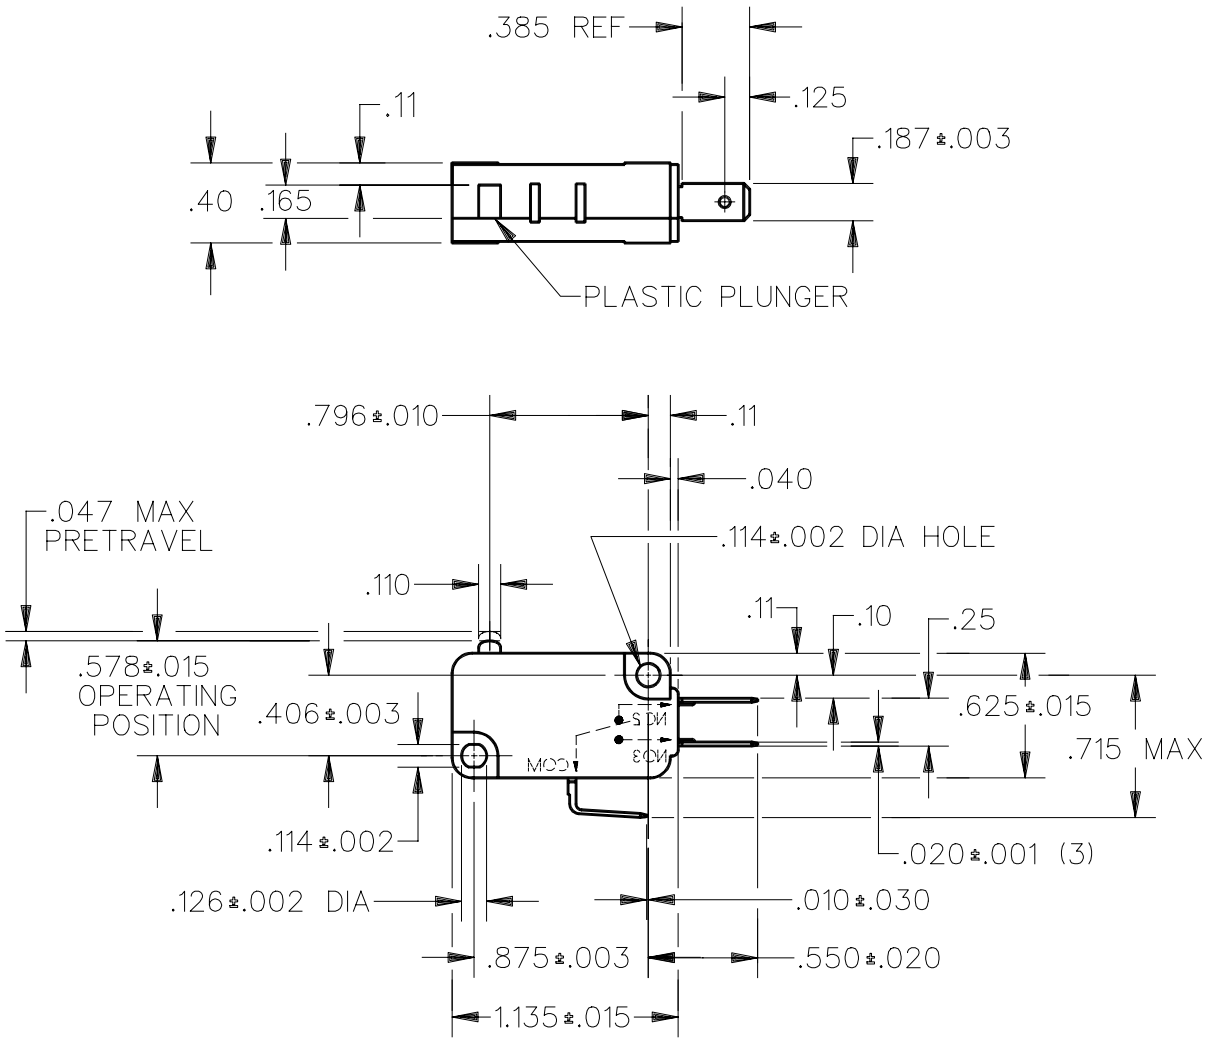

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

OPERATING FORCE — — — 50 GRAMS MAX
RELEASE FORCE — — — — 5 GRAMS MIN
DIFFERENTIAL TRAVEL — — — .002–.010
OVERTRAVEL — — — — — — .050 MIN
FREE POSITION — — — — .625 MAX
RELEASE TRAVEL — — — — — .010 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L216 10A 1/3HP 125, 250 OR 277 VAC
1/2A 125 VDC
1/4A 250 VDC; 4A 125 VAC "L"

SCALE FULL — DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

CATALOG LISTING V7–3E17D8
ISSUE 4
RELEASE NO. PR–18798
REPLACES X94131–V7

REVISIONS

A	PR–18798	W L S 6 NOV 90
B	CO 69746	WJC 15 MAR 91
C	CO 76104	G R T 4 OCT 93

CHECK
CHECK
DAW 10 NOV 90
CHECK
CHECK
W L S 6 NOV 90
DRAWN
DDM/CAD