


Common Mode Choke

| Parameter | Min. | Max. | Units |
|--------------------------|------|-------|------------------|
| Inductance ¹ | 100 | | μH |
| DCR | | 0.6 | Ω |
| Current @500 cm/A | | 0.032 | A_{RMS} |
| Leakage Inductance | | 20 | μH |
| Interwinding Capacitance | | 14 | pF |
| SRF | | 9.8 | MHz |

Hipot (Isolation) 1500 VAC


Operating Temperature Range -25°C to +60°C

Schematic Diagram



1. Inductance tested at $100\text{mV}_{\text{RMS}}$ and 10 kHz

Physical Dimensions
inches (mm)

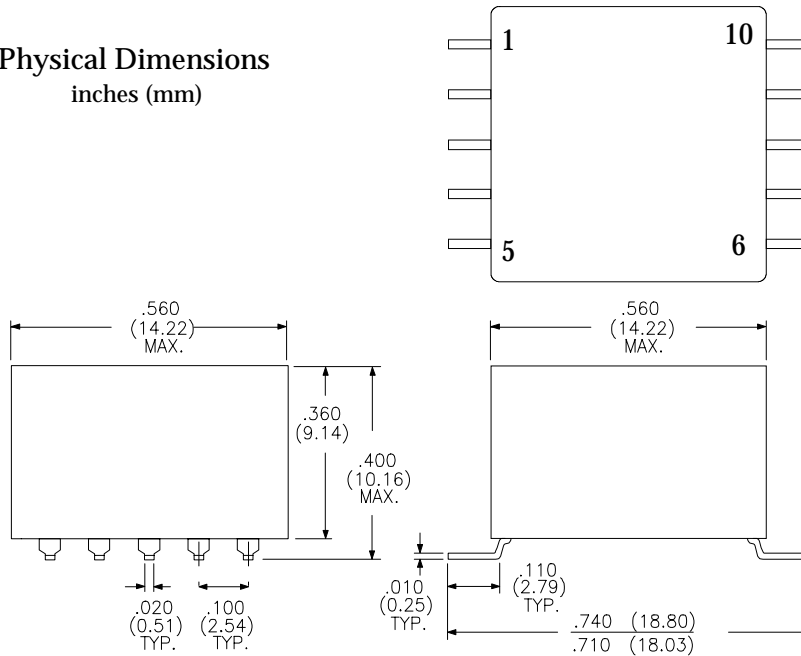

RHOMBUS P/N: **L-45073**

CUST P/N:

NAME:

DATE: **3/28/00**

SHEET: 1 OF 1