


# SERIES EG1381 SWITCHES



## SLIDE SWITCHES

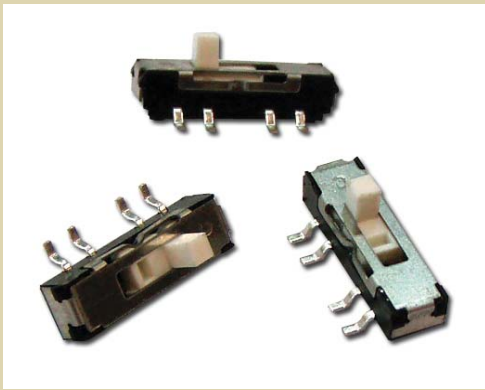

### FEATURES & BENEFITS

Tape & Reel Packaging  
3-position  
Surface Mount  
Sub-miniature

### APPLICATIONS / MARKETS

Computer Servers/peripherals  
Consumer electronics  
Instrumentation  
Test & measurement

### MECHANICAL SPECIFICATIONS

Mechanical Life:	10,000 cycles
Force:	250 +/- 100 gf to center position 300 +/- 150 gf from center position
Travel:	2.0 +/- 0.1mm each position

### ELECTRICAL SPECIFICATIONS

Electrical Life:	10,000 cycles
Contact Rating:	300mA @ 6VDC
Contact Resistance:	70mΩ (initial max)
Insulation Resistance:	100MΩ (Min @ 500VDC)
Dielectric Strength:	500VAC

### ENVIRONMENTAL SPECIFICATIONS

Operating Temperature:	-10°C to +60°C
Storage Temperature:	-20°C to +70°C

### HOW TO ORDER:

SERIES

EG

MODEL

1381

ACTUATOR

A = 2.0mm

