
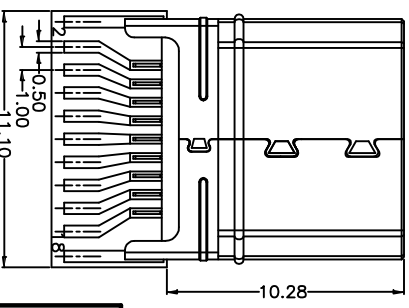
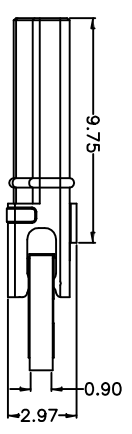
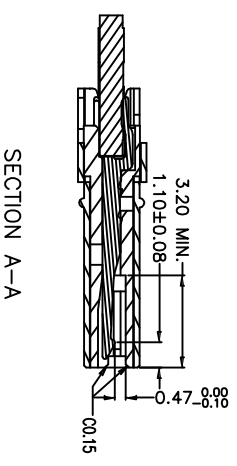
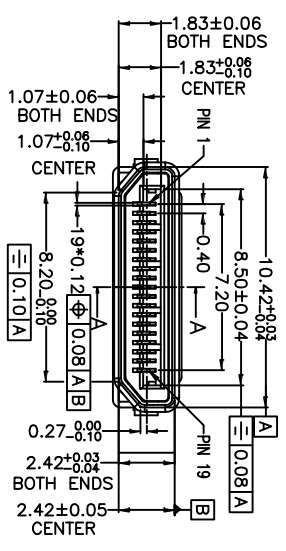


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/07/10	

APPROVED: \_\_\_\_\_ TITLE: \_\_\_\_\_  
 DATE: \_\_\_\_\_

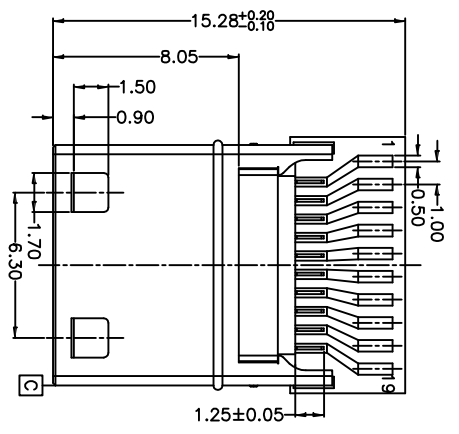

**SPECIFICATIONS:**  
 Material: \_\_\_\_\_  
 Housing: Hi-temp thermoplastic, UL 94V-0  
 Housing color: Black  
 Contact: Copper Alloy  
 Shield: Copper Alloy, Nickel plated  
 Plating: \_\_\_\_\_  
 Gold flash over Nickel underplate on contact area,  
 Tin over Copper underplate on tails.  
 Electrical:  
 Voltage rating: 40V  
 Current rating: 0.5A  
 Dielectric strength: 300VAC for 1 minute min.  
 Insulation resistance: 100 Megohm min.  
 Contact resistance: 10 mohms max.  
 Environmental:  
 Lead free, RoHS Compliant

UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE MM	
TOLERANCES: EXCEPT AS NOTED	
INCHES	Holes
.X ± .10	± .10
.XX ± .020	± .015
.XXX ± .015	± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE		MINI HDMI C TYPE, 19P, PLUG	
SIZE	PART NO.	SCALE	REV.
X	MHDMI-PLUG-0M1	NIS	-
REF:	S00075C	SHEET	1 OF 1



6 5 4 3 2 1