
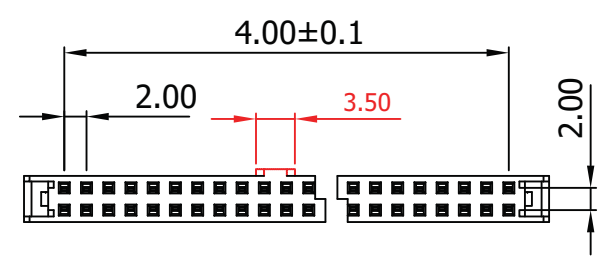
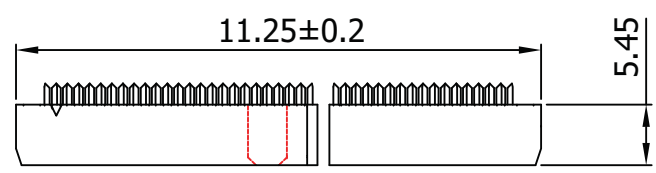
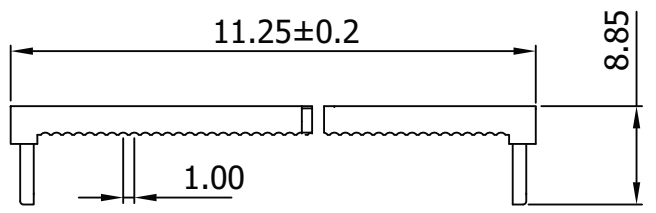


I.D.C SOCKET DUAL-ROW

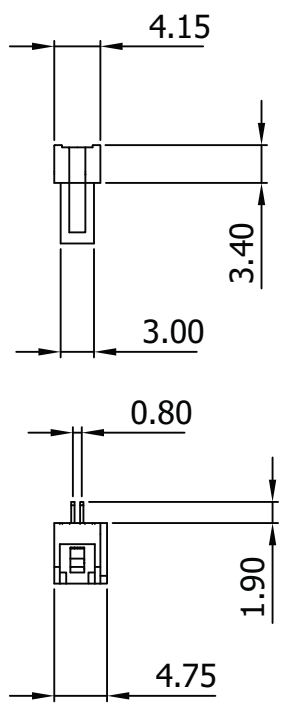

Material:

- Insulator: P.B.T. 30% Glass Fiber, UL 94V-0
- Contact Material: Phosphor Bronze, Gold flash over Nickel

Electrical:

- Current Rating: 1Amp DC
- Insulation Resistance: 1,000MΩ Min.
- Dielectric Withstanding: 500V AC
- Operating Temperature: -55°C ~ +105°C

Unit: MM±0.30MM



Scale	1:1							Name	Item No.
TOLERANCE						Drawn	10.19.11	Chappell	AWP2-06-7241-T-R
X.X	±0.40					Approved			Title IDC-Socket - 2.00MM Pitch, Gold Flash, Central Lug w/Strain Relief, 6 Contacts
X.XX	±0.25								Drawing No.
X.XXX	±0.15								rev00
Angle	±3°								Replace
									Sheet
		Modification	Date	Name					