



**Features:**

- Motor: AC Induction Motor
- Motor Protection: Thermal Protected
- Insulation Class F
- Bearing Type: Two Ball
- Connection: UL 1015 AWG 22, 400mm Wire Leads
- Rotor Material: Aluminum Alloy
- Impeller Material: Plastic UL94V-0
- Operating Temp:  
Two Ball: -20°C~70°C
- Life Expectancy:  
Two Ball: 70,000 Hours  
Two Ball: 100,000 Hours (-L)



Fan-S Division



pending CE




Model No.	Volt.	Freq.	Current	Power	Rated Speed	Maximum AirFlow		Maximum Static Pressure		Noise Level	Weight
	(VAC)	(Hz)	(A)	(W)	(rpm)	(CMM)	(CFM)	(InAq)	(mmAq)	(dB/A)	(g)
FDA5-13380NBKW3F #	115	50/60	0.26/0.24	26.0/28.0	2800/3200	4.11/4.67	145/165	0.591/0.827	15.0/21.0	62.0/65.0	800
FDA5-13380QBKW3F #	230	50/60	0.10/0.12	23.0/27.0	2800/3200	4.11/4.67	145/165	0.591/0.827	15.0/21.0	62.0/65.0	800

# Indicates "-L" (100,000 Hours Life Expectancy) or Leave Blank (70,000 Hours Life Expectancy)

Noise is measured at the distance of one (1) meter from the axis of intake.

50Hz

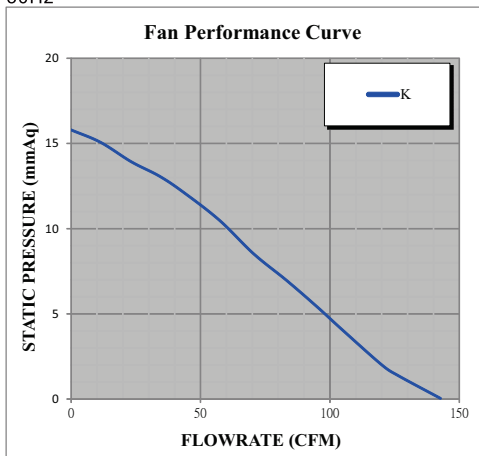

60Hz

